

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283505

Luminaire Tested: P3AS09R45B2750DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283505
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R45B2750DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R45 optic, 4000K CCT AND, 80CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 250.0 lumens
Efficiency: N/A
Efficacy: 19.1 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283505

CATALOG NUMBER: P3AS09R45B2750DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

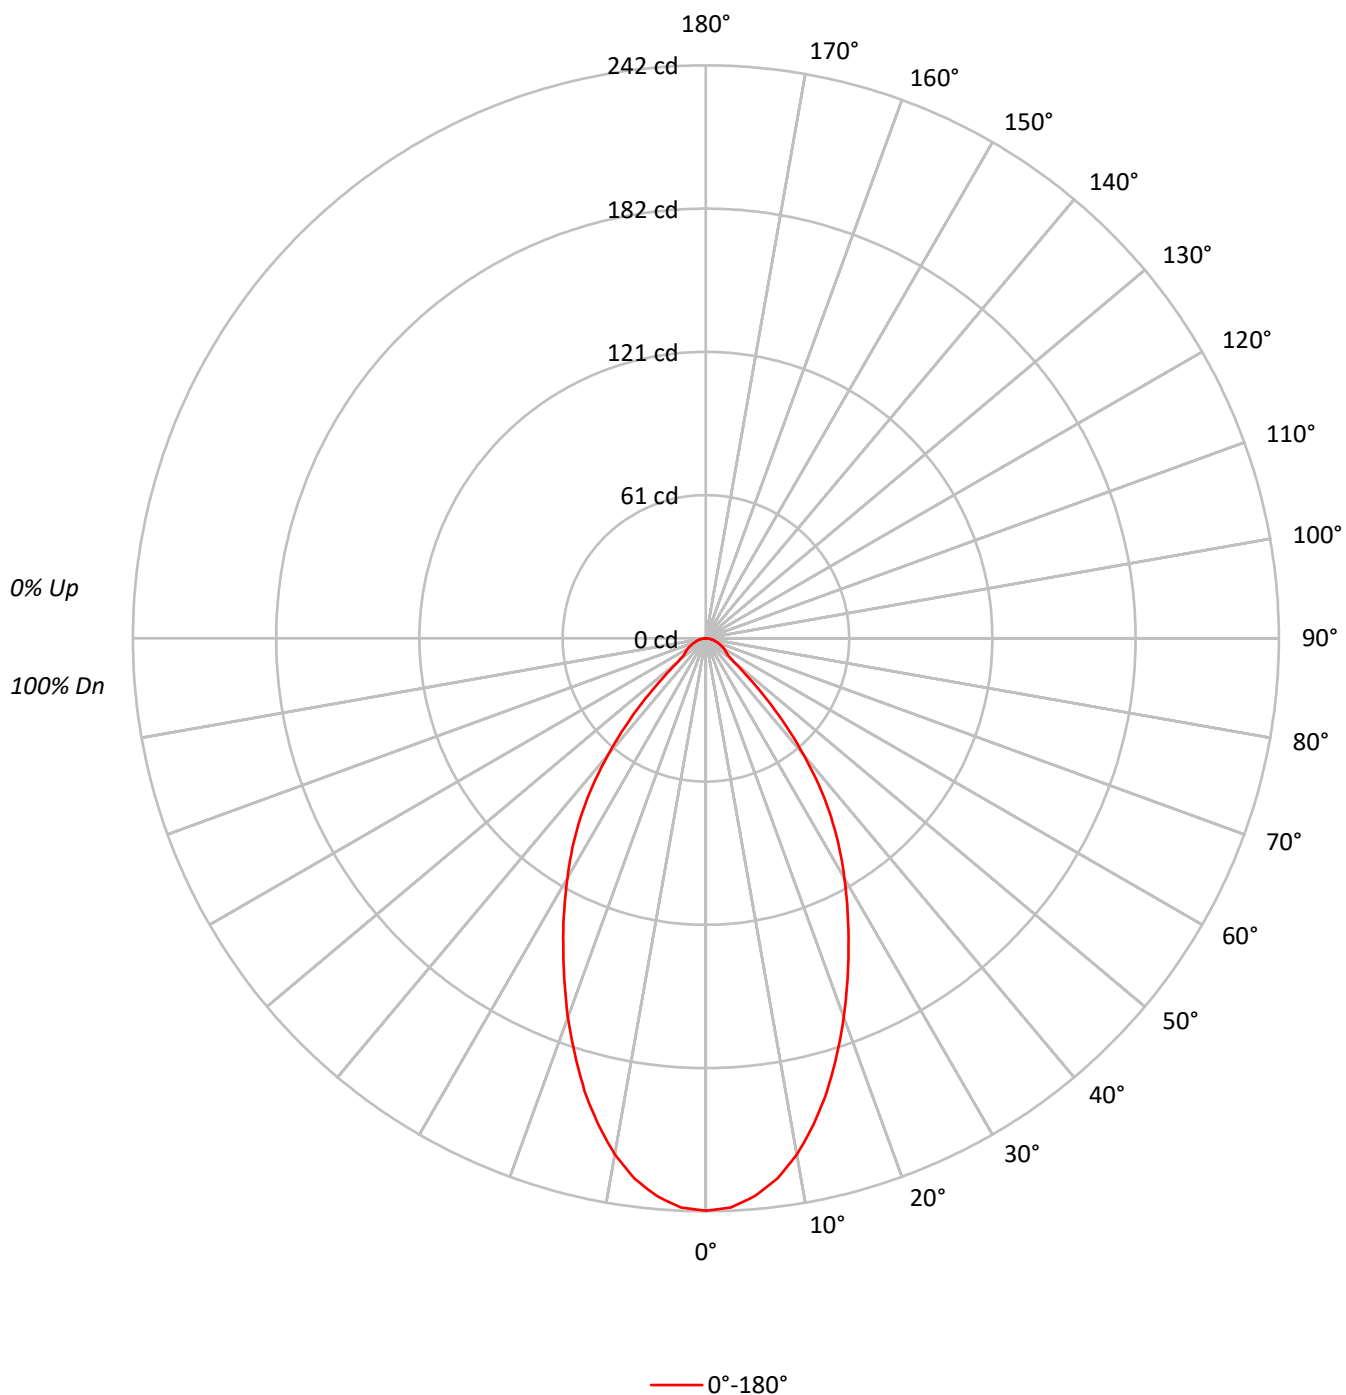

TEST NUMBER: P1283505

CATALOG NUMBER: P3AS09R45B2750DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89
3	99	92	86	82	97	90	85	81	88	83	80		85	81	78		83
4	94	85	78	74	92	84	78	73	81	76	72		79	75	71		77
5	88	79	72	67	86	78	71	67	76	70	66		74	69	65		72
6	83	73	66	61	81	72	66	61	71	65	61		69	64	60		68
7	78	68	61	57	77	67	61	56	66	60	56		65	60	56		64
8	74	64	57	52	73	63	57	52	62	56	52		61	56	52		60
9	70	60	53	49	69	59	53	49	58	52	48		57	52	48		56
10	67	56	50	45	66	56	49	45	55	49	45		54	49	45		53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53000
5°	52058
10°	49275
15°	44926
20°	39740
25°	34502
30°	29625
35°	24681
40°	18377
45°	11257
50°	5219
55°	4091
60°	3903
65°	3580
70°	3334
75°	3135
80°	2904
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11257 cd/sqm

TEST NUMBER: P1283505

CATALOG NUMBER: P3AS09R45B2750DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.1	8.8
10°-20°	55.1	22.0
20°-30°	65.5	26.2
30°-40°	56.9	22.8
40°-50°	28.5	11.4
50°-60°	9.9	4.0
60°-70°	7.0	2.8
70°-80°	3.9	1.5
80°-90°	1.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	142.7	57.1
0°-40°	199.6	79.8
0°-60°	238.0	95.2
0°-90°	250.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	250.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	242	
5°	236	22
15°	198	55
25°	143	65
35°	92	57
45°	36	29
55°	11	10
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1283505

CATALOG NUMBER: P3AS09R45B2750DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	241.7
2.5°	240.6
5°	236.5
7.5°	230.2
10°	221.3
12.5°	210.3
15°	197.9
17.5°	184.1
20°	170.3
22.5°	156.2
25°	142.6
27.5°	129.6
30°	117.0
32.5°	104.9
35°	92.2
37.5°	78.7
40°	64.2
42.5°	50.1
45°	36.3
47.5°	23.9
50°	15.3
52.5°	11.8
55°	10.7
57.5°	9.8
60°	8.9
62.5°	8.1
65°	6.9
67.5°	6.1
70°	5.2
72.5°	4.3
75°	3.7
77.5°	2.9
80°	2.3
82.5°	1.7
85°	0.9
87.5°	0.6
90°	0.0

(END OF REPORT)