

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283872

Luminaire Tested: P3AS09R60B2750DE010 E3CD1MMS_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283872
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R60B2750DE010 E3CD1MMS_2700K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 757.0 lumens
Efficiency: N/A
Efficacy: 57.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283872

CATALOG NUMBER: P3AS09R60B2750DE010 E3CD1MMS_2700K

Luminous Intensity Polar Plot

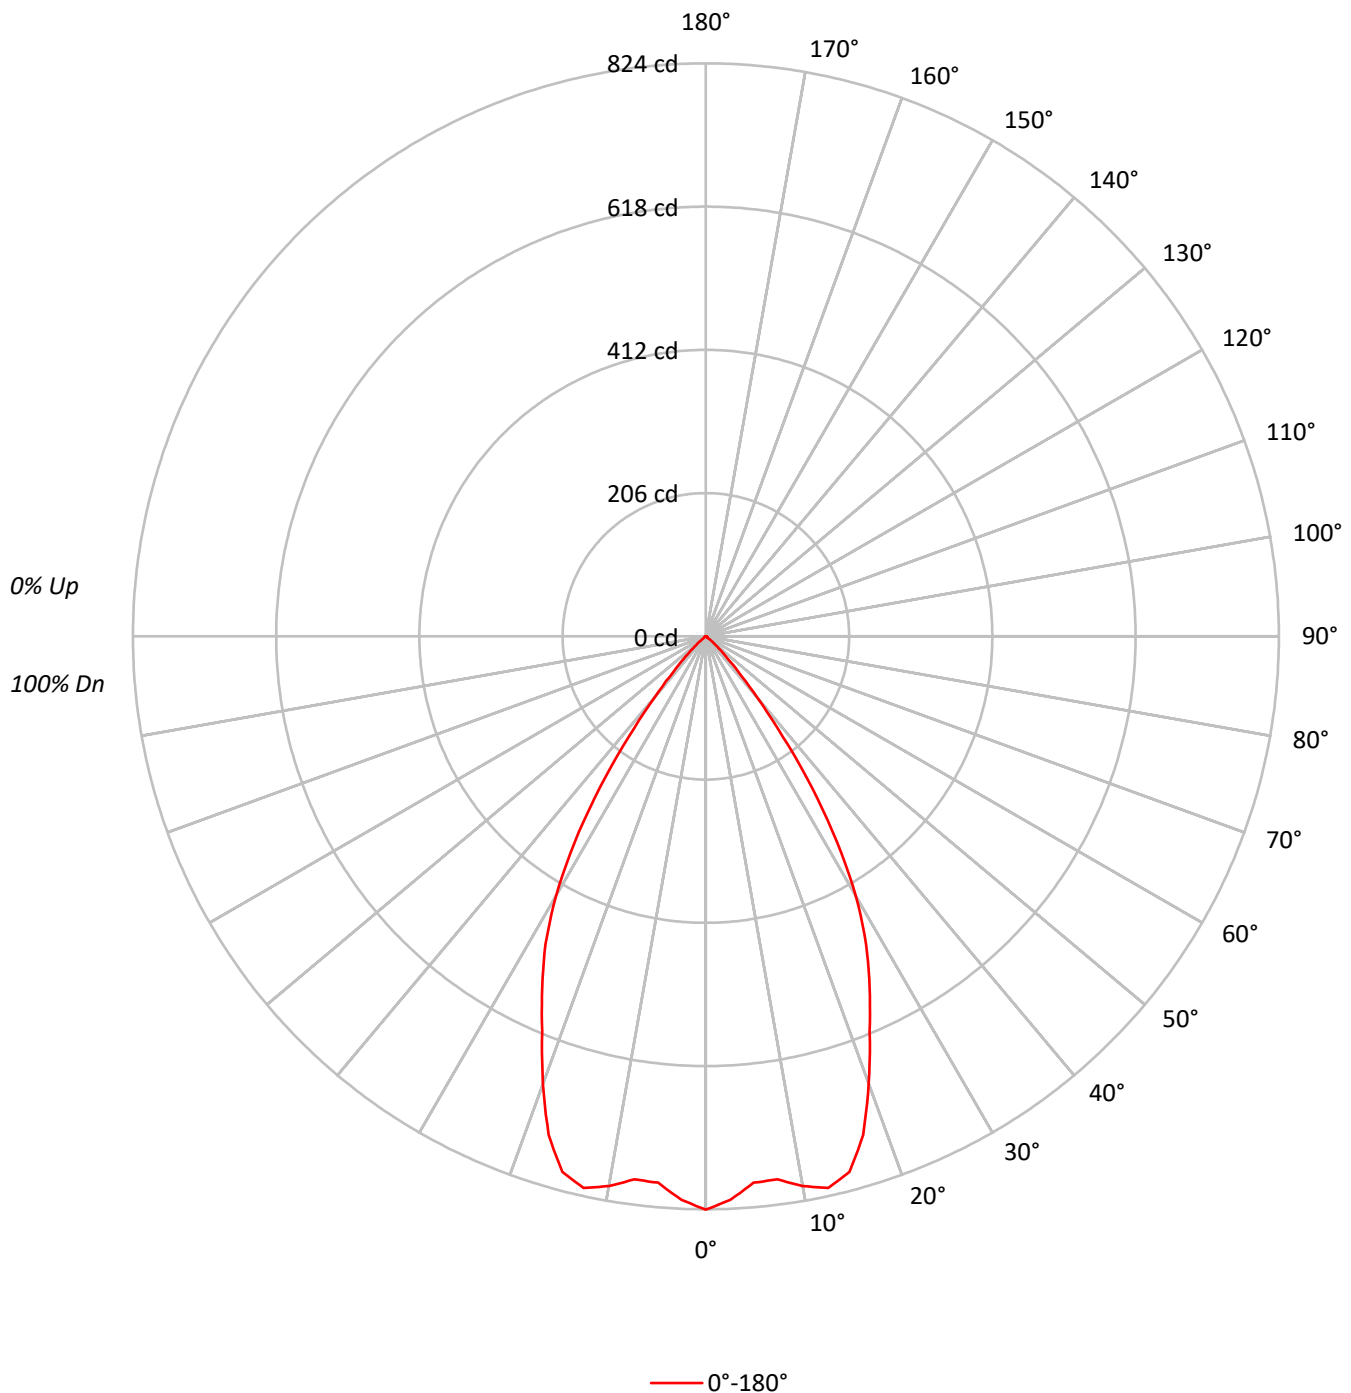

TEST NUMBER: P1283872

CATALOG NUMBER: P3AS09R60B2750DE010 E3CD1MMS_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	100	98		97	96	95
2	108	103	99	96		106	102	98	95		98	95	93		95	93	91		93	91	89
3	103	96	91	88		101	95	90	87		92	89	85		90	87	84		88	85	83
4	98	90	85	81		96	89	84	80		87	83	79		85	81	78		83	80	77
5	93	84	79	74		91	84	78	74		82	77	73		80	76	73		79	75	72
6	88	79	73	69		87	78	73	69		77	72	68		76	71	68		74	70	68
7	84	75	69	64		82	74	68	64		73	68	64		71	67	64		70	66	63
8	80	70	64	60		78	70	64	60		69	64	60		68	63	60		67	62	59
9	76	66	61	57		75	66	60	56		65	60	56		64	59	56		63	59	56
10	72	63	57	53		71	62	57	53		62	56	53		61	56	53		60	56	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	180775
5°	173607
10°	178732
15°	181023
20°	159847
25°	134717
30°	109257
35°	71153
40°	32690
45°	12528
50°	4196
55°	1109
60°	1009
65°	934
70°	769
75°	1017
80°	758
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12528 cd/sqm

TEST NUMBER: P1283872

CATALOG NUMBER: P3AS09R60B2750DE010 E3CD1MMS_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.9	10.0
10°-20°	218.4	28.8
20°-30°	254.7	33.6
30°-40°	164.4	21.7
40°-50°	36.8	4.9
50°-60°	3.7	0.5
60°-70°	1.8	0.2
70°-80°	1.0	0.1
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	549.0	72.5
0°-40°	713.4	94.2
0°-60°	753.8	99.6
0°-90°	757.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	757.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	824	
5°	789	76
15°	797	218
25°	557	255
35°	266	164
45°	40	37
55°	3	4
65°	2	2
75°	1	1
85°	1	0
90°	0	

TEST NUMBER: P1283872

CATALOG NUMBER: P3AS09R60B2750DE010 E3CD1MMS_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	824.4
2.5°	810.9
5°	788.7
7.5°	787.5
10°	802.7
12.5°	812.7
15°	797.4
17.5°	751.8
20°	685.0
22.5°	615.3
25°	556.8
27.5°	499.4
30°	431.5
32.5°	351.9
35°	265.8
37.5°	181.5
40°	114.2
42.5°	68.5
45°	40.4
47.5°	23.4
50°	12.3
52.5°	4.1
55°	2.9
57.5°	2.3
60°	2.3
62.5°	1.8
65°	1.8
67.5°	1.8
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.6
87.5°	0.0
90°	0.0

(END OF REPORT)