

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283901

Luminaire Tested: P3AS09R60B2750DE010 E3D1WH_5000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283901
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R60B2750DE010 E3D1WH_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R60 optic, 5000K CCT AND, 80CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 751.0 lumens
Efficiency: N/A
Efficacy: 57.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283901

CATALOG NUMBER: P3AS09R60B2750DE010 E3D1WH_5000K

Luminous Intensity Polar Plot

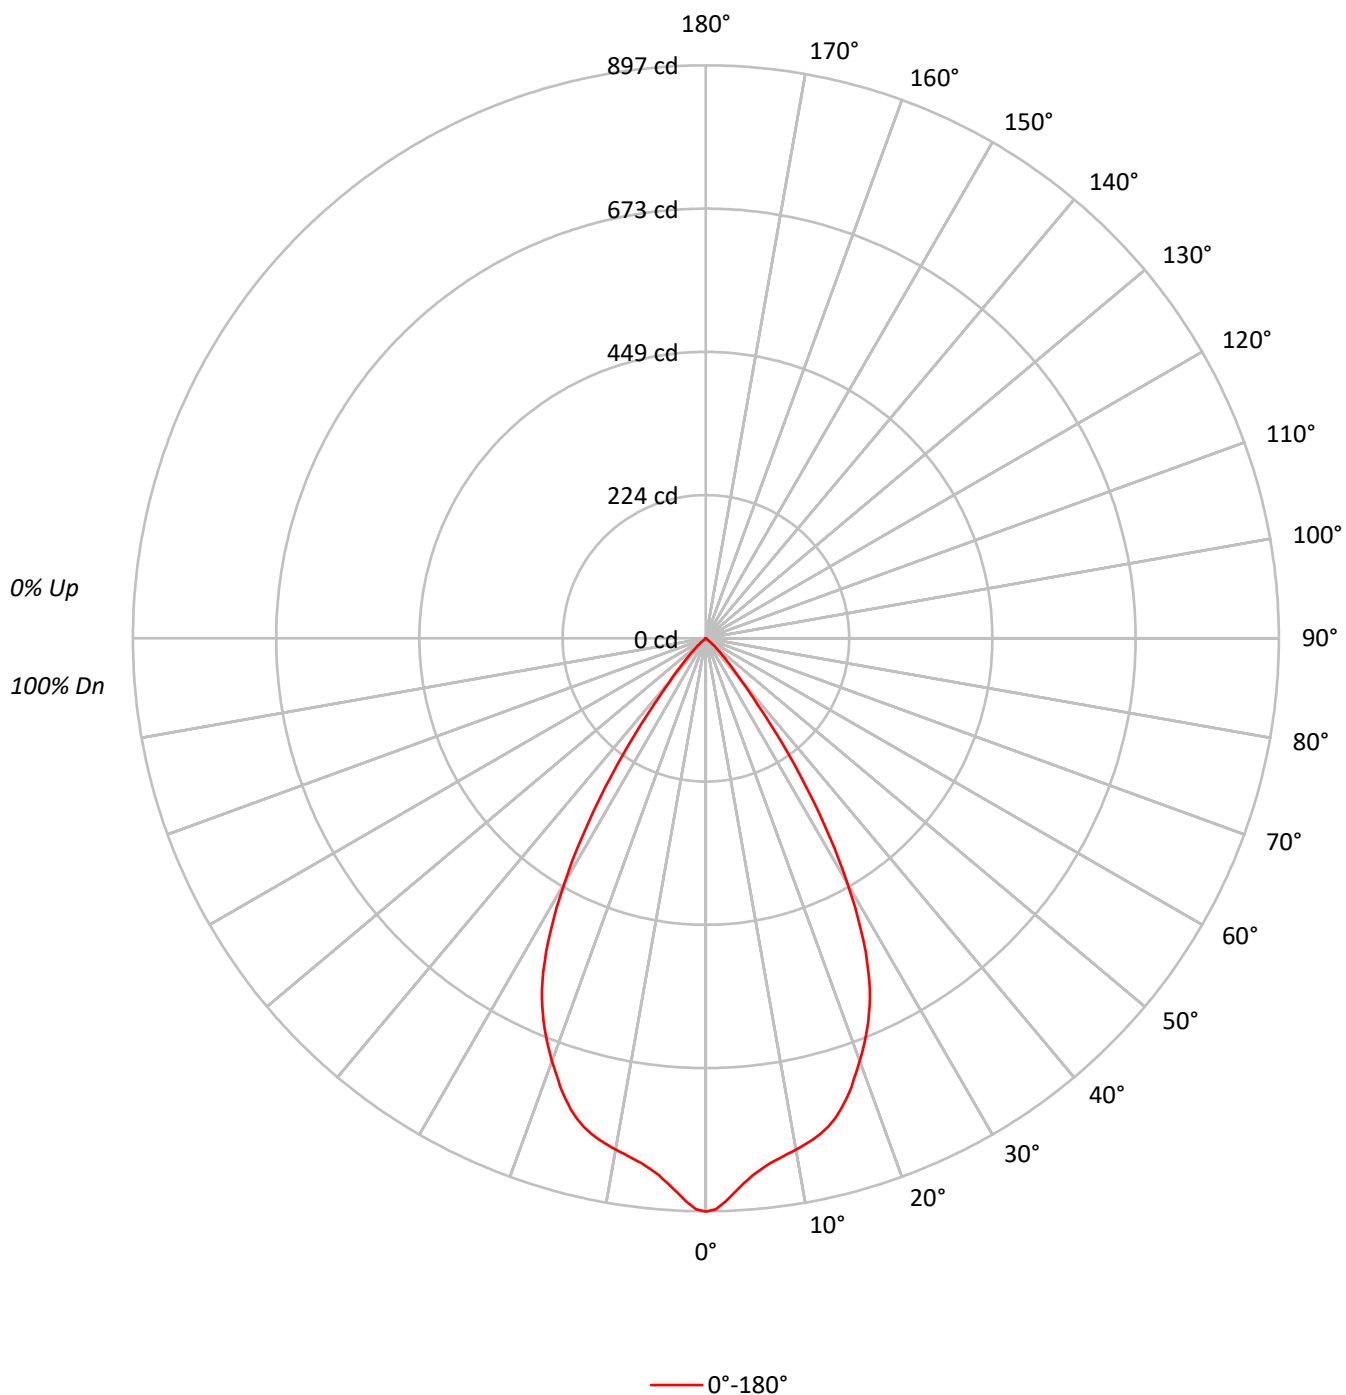



TEST NUMBER: P1283901

CATALOG NUMBER: P3AS09R60B2750DE010 E3D1WH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	106		111	109	107	105		105	103	102		101	100	99		98	97	96
2	108	104	100	96		106	102	98	95		99	96	93		96	93	91		93	91	89
3	103	97	92	88		101	96	91	88		93	89	86		91	87	85		88	86	84
4	98	91	85	81		96	90	85	81		88	83	80		86	82	79		84	81	78
5	93	85	80	75		92	84	79	75		83	78	74		81	77	74		79	76	73
6	89	80	74	70		87	79	74	70		78	73	70		77	72	69		75	72	69
7	85	76	70	66		83	75	69	65		74	69	65		72	68	65		71	67	64
8	81	71	65	61		79	71	65	61		70	65	61		69	64	61		68	64	61
9	77	67	62	58		76	67	61	58		66	61	57		65	61	57		64	60	57
10	73	64	58	54		72	63	58	54		63	58	54		62	57	54		61	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	196782
5°	185758
10°	180936
15°	176800
20°	164374
25°	146960
30°	112245
35°	64808
40°	25161
45°	10482
50°	2320
55°	344
60°	263
65°	156
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 10482 cd/sqm

TEST NUMBER: P1283901

CATALOG NUMBER: P3AS09R60B2750DE010 E3D1WH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.7	10.6
10°-20°	216.9	28.9
20°-30°	271.7	36.2
30°-40°	151.9	20.2
40°-50°	28.9	3.8
50°-60°	1.5	0.2
60°-70°	0.3	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	568.3	75.7
0°-40°	720.2	95.9
0°-60°	750.5	99.9
0°-90°	751.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	751.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	897	
5°	844	80
15°	779	217
25°	607	272
35°	242	152
45°	34	29
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1283901

CATALOG NUMBER: P3AS09R60B2750DE010 E3D1WH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	897.4
1°	893.7
2°	882.0
3°	868.2
4°	855.3
5°	843.9
6°	835.3
7°	827.9
8°	822.4
9°	817.2
10°	812.6
11°	808.0
12°	802.7
13°	796.3
14°	788.6
15°	778.8
16°	766.8
17°	753.3
18°	737.9
19°	720.4
20°	704.4
21°	687.2
22°	669.4
23°	650.7
24°	630.1
25°	607.4
26°	580.6
27°	550.8
28°	517.3
29°	481.7
30°	443.3
31°	404.6
32°	364.7
32.5°	342.8
33°	323.2
34°	282.3
35°	242.1
36°	205.8
37°	167.4
37.5°	149.9
38°	132.7
39°	106.9
40°	87.9
42.5°	53.5
45°	33.8



TEST NUMBER: P1283901

CATALOG NUMBER: P3AS09R60B2750DE010 E3D1WH_5000K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	18.7
50°	6.8
52.5°	1.5
55°	0.9
57.5°	0.6
60°	0.6
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)