

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283971

Luminaire Tested: P3AS09R60B2750DE010 E3DLP1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1283971  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R60B2750DE010 E3DLP1GPH\_5000K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R60 optic, 5000K CCT AND, 80CRI , E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 223.0 lumens  
Efficiency: N/A  
Efficacy: 17.0 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 13.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1283971  
CATALOG NUMBER: P3AS09R60B2750DE010 E3DLP1GPH\_5000K

### Luminous Intensity Polar Plot

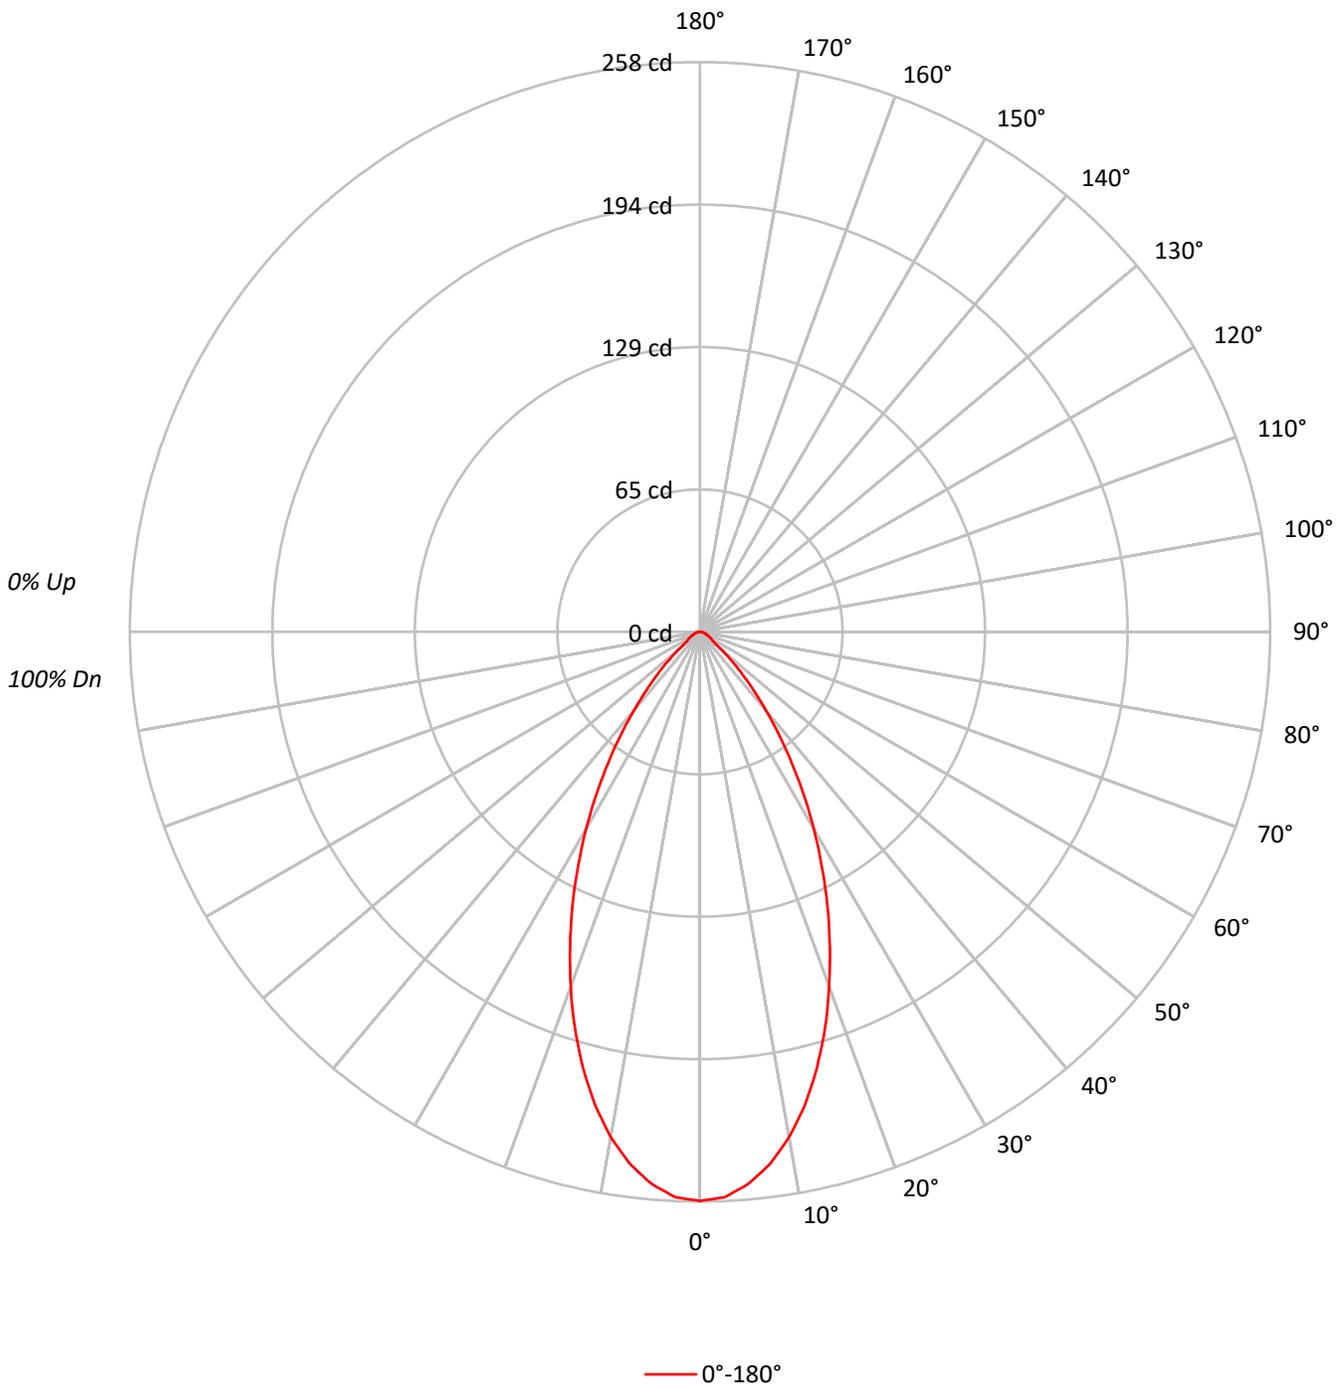



TEST NUMBER: P1283971  
 CATALOG NUMBER: P3AS09R60B2750DE010 E3DLP1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72			
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62			
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	58			
8	77	67	60	56	75	66	60	56	65	60	56	64	59	55	63	58	55	54			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	56509
5°	55250
10°	51725
15°	46402
20°	39903
25°	33002
30°	26080
35°	19354
40°	13339
45°	8373
50°	4605
55°	2676
60°	2412
65°	2075
70°	1795
75°	1779
80°	1515
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8373 cd/sqm



TEST NUMBER: P1283971  
 CATALOG NUMBER: P3AS09R60B2750DE010 E3DLP1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	23.4	10.5
10°-20°	56.8	25.5
20°-30°	62.3	27.9
30°-40°	45.4	20.3
40°-50°	21.4	9.6
50°-60°	7.0	3.1
60°-70°	4.0	1.8
70°-80°	2.1	1.0
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	142.4	63.9
0°-40°	187.8	84.2
0°-60°	216.2	97.0
0°-90°	223.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	223.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	258	
5°	251	23
15°	204	57
25°	136	62
35°	72	45
45°	27	21
55°	7	7
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1283971  
CATALOG NUMBER: P3AS09R60B2750DE010 E3DLP1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	257.7
2.5°	256.2
5°	251.0
7.5°	243.0
10°	232.3
12.5°	219.4
15°	204.4
17.5°	188.2
20°	171.0
22.5°	153.5
25°	136.4
27.5°	119.2
30°	103.0
32.5°	87.3
35°	72.3
37.5°	58.8
40°	46.6
42.5°	35.9
45°	27.0
47.5°	19.6
50°	13.5
52.5°	8.9
55°	7.0
57.5°	6.1
60°	5.5
62.5°	4.6
65°	4.0
67.5°	3.4
70°	2.8
72.5°	2.5
75°	2.1
77.5°	1.5
80°	1.2
82.5°	0.9
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)