

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284056

Luminaire Tested: P3AS09R65B2750DE010 E3DL1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1284056  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R65B2750DE010 E3DL1GPH\_5000K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R65 optic, 5000K CCT AND, 80CRI , E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 308.0 lumens  
Efficiency: N/A  
Efficacy: 23.5 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 13.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1284056  
CATALOG NUMBER: P3AS09R65B2750DE010 E3DL1GPH\_5000K

### Luminous Intensity Polar Plot

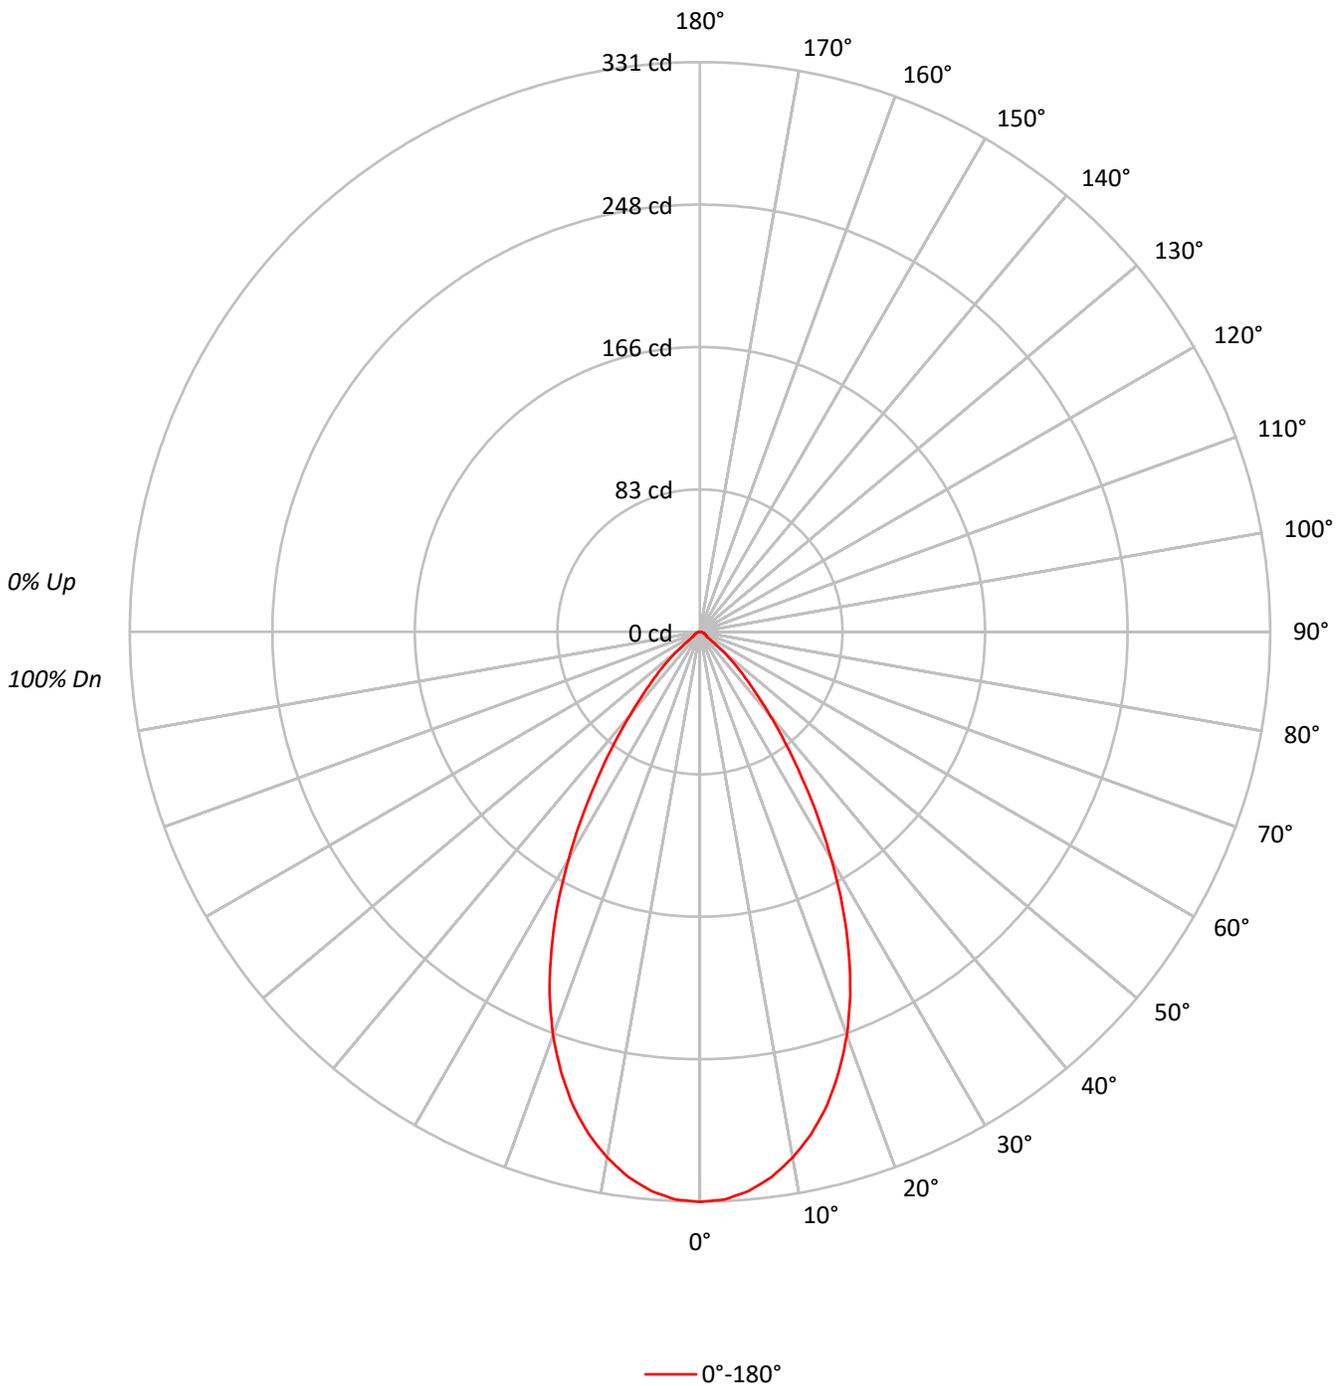



TEST NUMBER: P1284056  
 CATALOG NUMBER: P3AS09R65B2750DE010 E3DL1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	95	89	85	99	93	88	84	90	86	83	88	85	82	86	83	80	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	68	68	68	68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	67	64	63	63	63	63
7	82	72	66	61	80	71	65	61	70	64	61	69	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55	55	55	55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51	51	51	51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48	48	48	48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	72626
5°	71759
10°	69048
15°	64677
20°	58175
25°	49382
30°	38639
35°	27519
40°	18005
45°	11133
50°	5663
55°	1988
60°	1754
65°	1764
70°	1603
75°	1525
80°	1515
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11133 cd/sqm



TEST NUMBER: P1284056

CATALOG NUMBER: P3AS09R65B2750DE010 E3DL1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.6	9.9
10°-20°	79.3	25.7
20°-30°	92.7	30.1
30°-40°	64.8	21.0
40°-50°	28.5	9.3
50°-60°	6.3	2.1
60°-70°	3.3	1.1
70°-80°	1.9	0.6
80°-90°	0.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	202.6	65.8
0°-40°	267.3	86.8
0°-60°	302.2	98.1
0°-90°	308.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	308.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	331	
5°	326	31
15°	285	79
25°	204	93
35°	103	65
45°	36	29
55°	5	6
65°	3	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1284056  
CATALOG NUMBER: P3AS09R65B2750DE010 E3DL1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	331.2
2.5°	330.0
5°	326.0
7.5°	319.3
10°	310.1
12.5°	298.7
15°	284.9
17.5°	268.0
20°	249.3
22.5°	228.1
25°	204.1
27.5°	179.0
30°	152.6
32.5°	127.1
35°	102.8
37.5°	81.7
40°	62.9
42.5°	47.6
45°	35.9
47.5°	26.4
50°	16.6
52.5°	8.6
55°	5.2
57.5°	4.6
60°	4.0
62.5°	3.7
65°	3.4
67.5°	2.8
70°	2.5
72.5°	2.1
75°	1.8
77.5°	1.5
80°	1.2
82.5°	0.9
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)