

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284113

Luminaire Tested: P3AS09R65B2750DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284113
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R65B2750DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R65 optic, 3000K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 196.0 lumens
Efficiency: N/A
Efficacy: 15.0 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284113

CATALOG NUMBER: P3AS09R65B2750DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

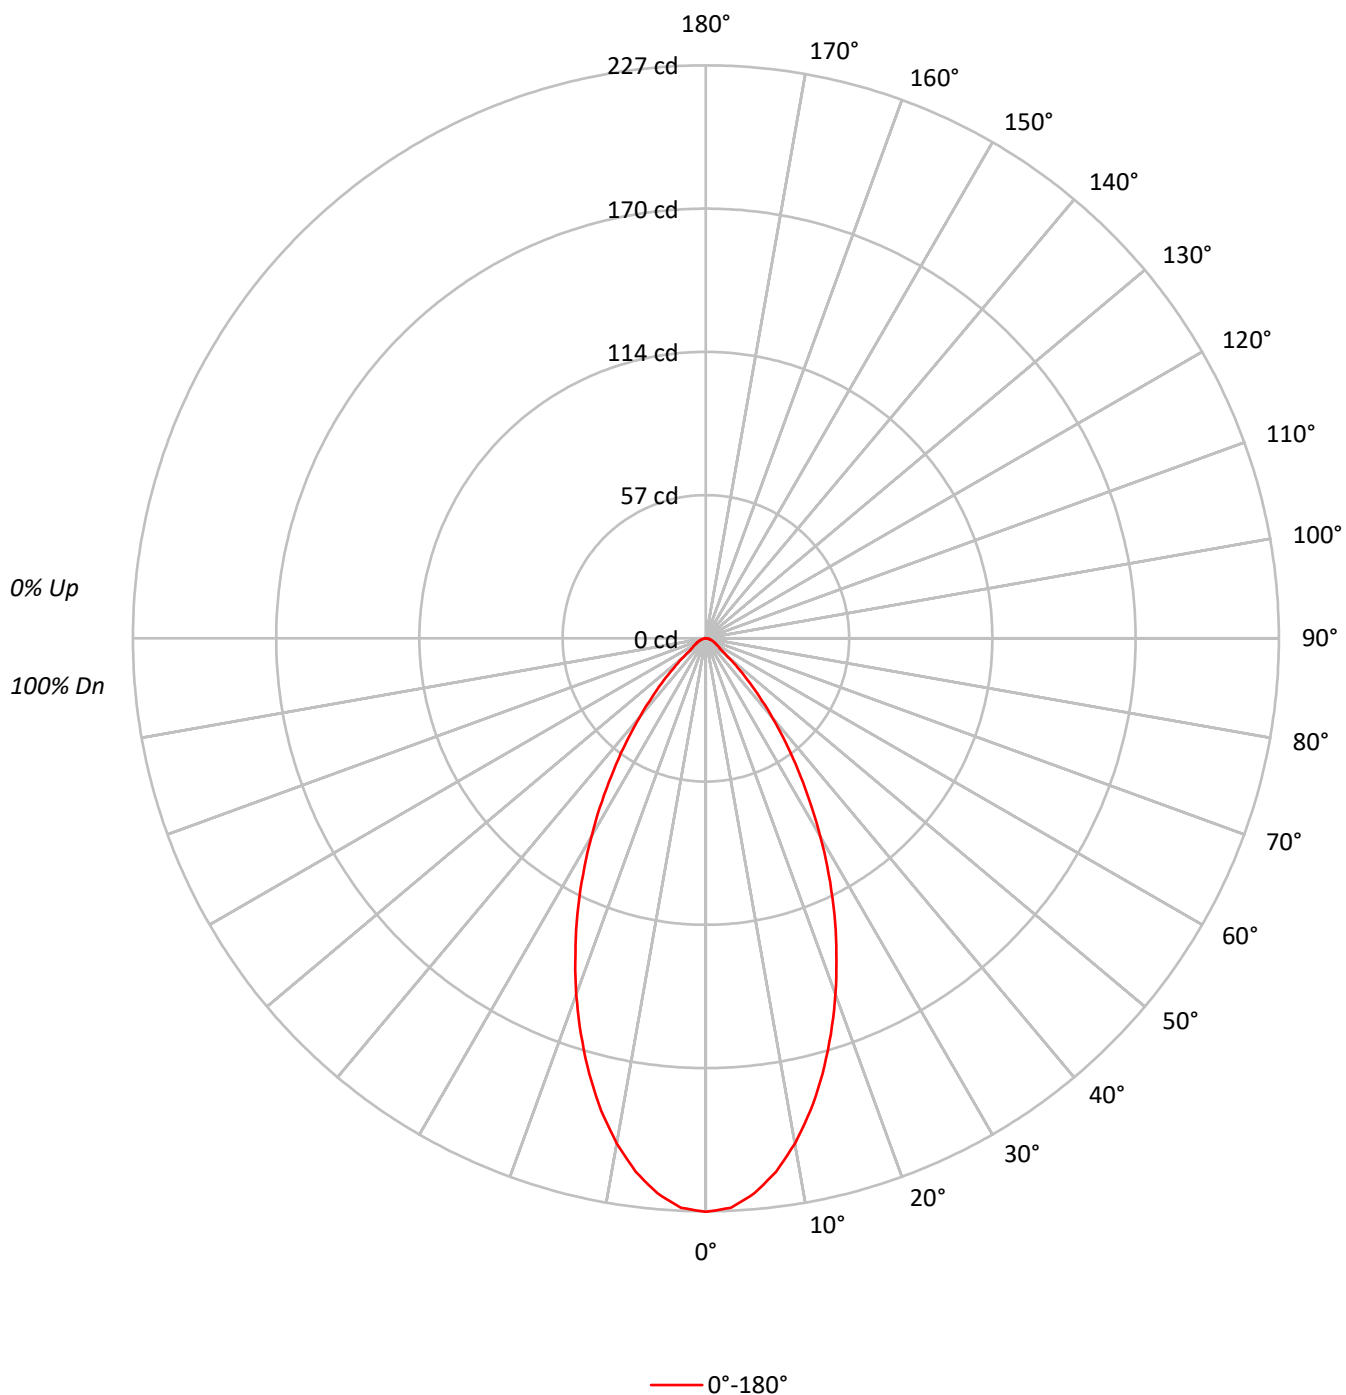

TEST NUMBER: P1284113

CATALOG NUMBER: P3AS09R65B2750DE010 E3DLP1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		90
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	49821
5°	48580
10°	45245
15°	40545
20°	35026
25°	29131
30°	22966
35°	17025
40°	11736
45°	7288
50°	3957
55°	2485
60°	2105
65°	1920
70°	1603
75°	1440
80°	1389
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7288 cd/sqm

TEST NUMBER: P1284113

CATALOG NUMBER: P3AS09R65B2750DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	20.5	10.5
10°-20°	49.6	25.3
20°-30°	54.9	28.0
30°-40°	39.9	20.3
40°-50°	18.7	9.5
50°-60°	6.3	3.2
60°-70°	3.6	1.8
70°-80°	1.9	1.0
80°-90°	0.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	125.0	63.8
0°-40°	164.9	84.1
0°-60°	189.9	96.9
0°-90°	196.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	196.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	227	
5°	221	21
15°	179	50
25°	120	55
35°	64	40
45°	24	19
55°	6	6
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1284113

CATALOG NUMBER: P3AS09R65B2750DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	227.2
2.5°	225.8
5°	220.7
7.5°	213.1
10°	203.2
12.5°	191.6
15°	178.6
17.5°	164.5
20°	150.1
22.5°	135.1
25°	120.4
27.5°	105.4
30°	90.7
32.5°	76.6
35°	63.6
37.5°	51.7
40°	41.0
42.5°	31.4
45°	23.5
47.5°	17.0
50°	11.6
52.5°	7.9
55°	6.5
57.5°	5.7
60°	4.8
62.5°	4.2
65°	3.7
67.5°	3.1
70°	2.5
72.5°	2.3
75°	1.7
77.5°	1.4
80°	1.1
82.5°	0.8
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)