

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284195

Luminaire Tested: P3AS09R70B2750DE010 E3D1WMH_4000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284195
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R70B2750DE010 E3D1WMH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R70 optic, 4000K CCT AND, 80CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 700.1 lumens
Efficiency: N/A
Efficacy: 53.4 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.06
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284195

CATALOG NUMBER: P3AS09R70B2750DE010 E3D1WMH_4000K

Luminous Intensity Polar Plot

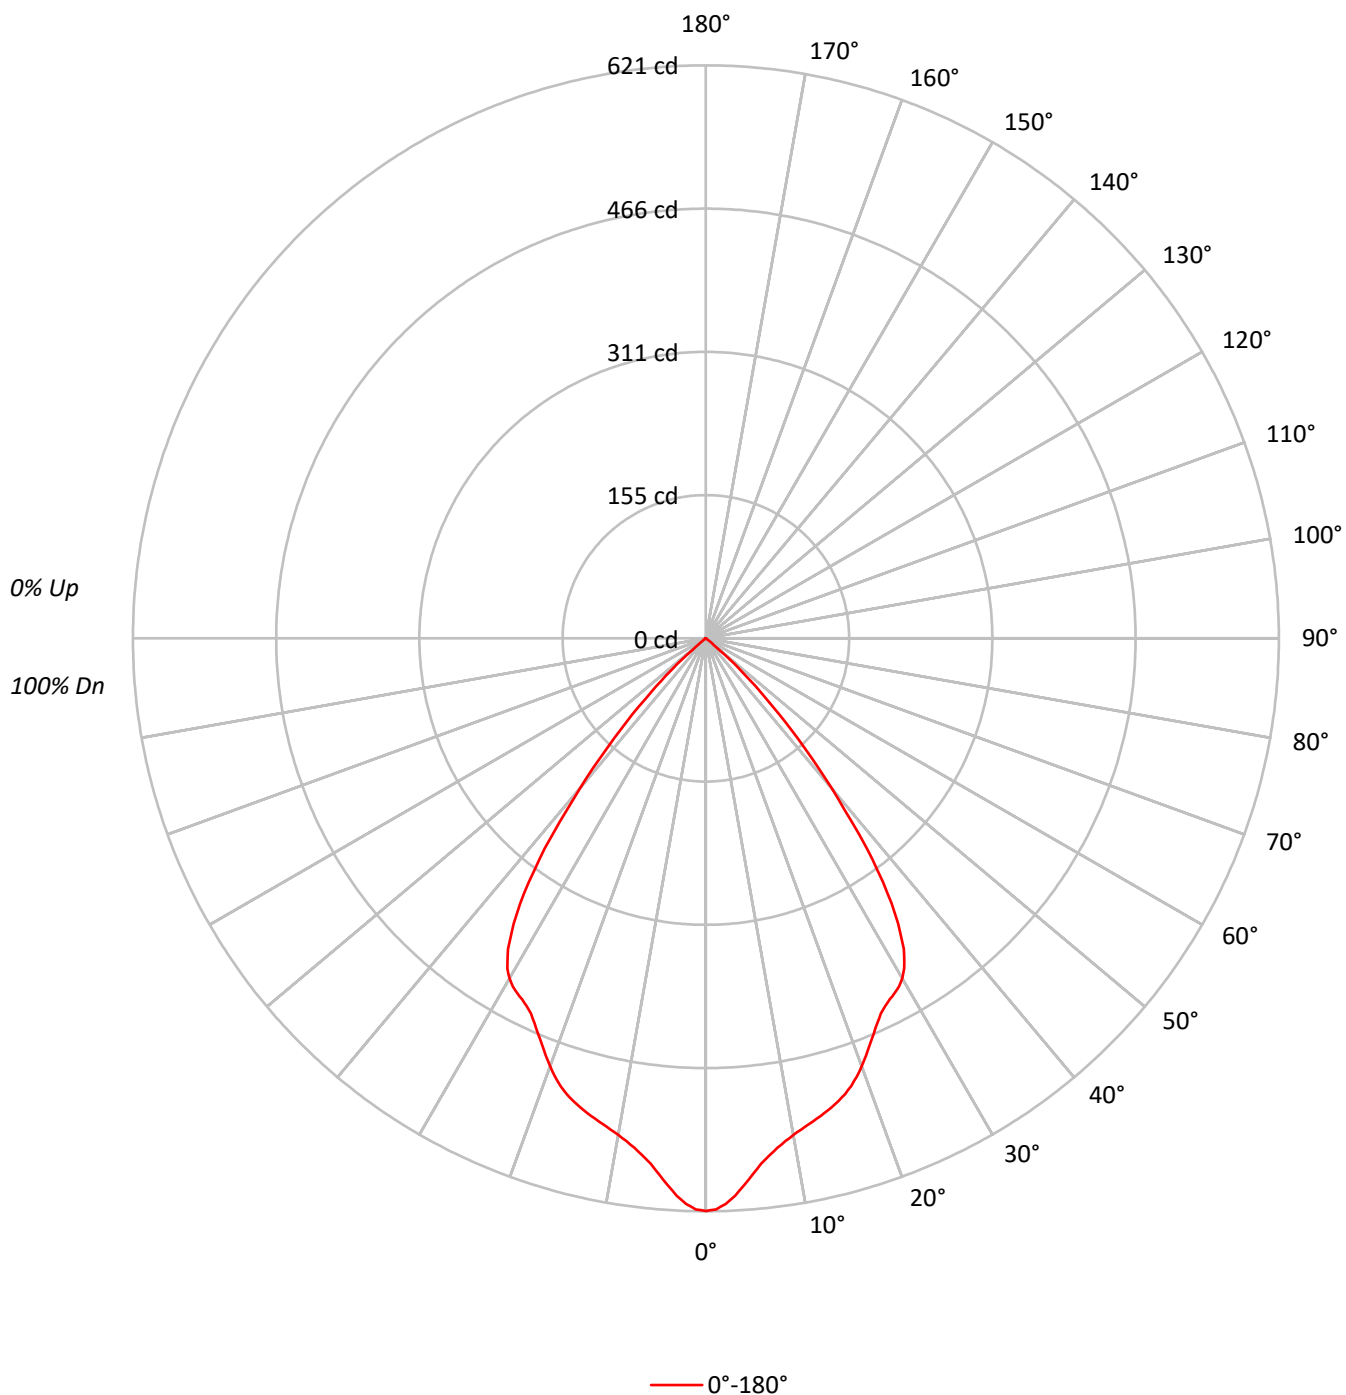

TEST NUMBER: P1284195

CATALOG NUMBER: P3AS09R70B2750DE010 E3D1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		86
4	95	87	81	77	94	86	81	77	84	79	76		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		55	50	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	136108
5°	128351
10°	121686
15°	119501
20°	115183
25°	108587
30°	107814
35°	93906
40°	60742
45°	28716
50°	4025
55°	344
60°	263
65°	311
70°	192
75°	254
80°	379
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 28716 cd/sqm

TEST NUMBER: P1284195

CATALOG NUMBER: P3AS09R70B2750DE010 E3D1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.4	7.8
10°-20°	147.8	21.1
20°-30°	209.1	29.9
30°-40°	210.2	30.0
40°-50°	75.6	10.8
50°-60°	2.0	0.3
60°-70°	0.5	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	411.4	58.8
0°-40°	621.6	88.8
0°-60°	699.2	99.9
0°-90°	700.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	700.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	621	
5°	583	54
15°	526	148
25°	449	209
35°	351	210
45°	93	76
55°	1	2
65°	1	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1284195

CATALOG NUMBER: P3AS09R70B2750DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	620.7
1°	619.0
2°	613.5
3°	604.9
4°	594.0
5°	583.1
6°	572.7
7°	564.7
8°	557.5
9°	551.7
10°	546.5
11°	542.2
12°	538.2
13°	534.2
14°	530.4
15°	526.4
16°	521.5
17°	516.4
18°	510.0
19°	502.3
20°	493.6
21°	484.2
22°	474.7
23°	465.5
24°	456.6
25°	448.8
26°	443.3
27°	439.0
28°	435.6
29°	431.5
30°	425.8
31°	417.5
32°	405.7
32.5°	399.1
33°	390.1
34°	372.6
35°	350.8
36°	326.6
37°	299.3
37.5°	286.6
38°	269.4
39°	238.6
40°	212.2
42.5°	146.9
45°	92.6



TEST NUMBER: P1284195

CATALOG NUMBER: P3AS09R70B2750DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	49.7
50°	11.8
52.5°	1.4
55°	0.9
57.5°	0.9
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.3
77.5°	0.3
80°	0.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)