

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284324

Luminaire Tested: P3AS13R15B2750DE010 E3DL1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284324
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R15B2750DE010 E3DL1GPH_3500K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R15 optic, 3500K CCT AND, 80CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 395.0 lumens
Efficiency: N/A
Efficacy: 20.7 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284324

CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1GPH_3500K

Luminous Intensity Polar Plot

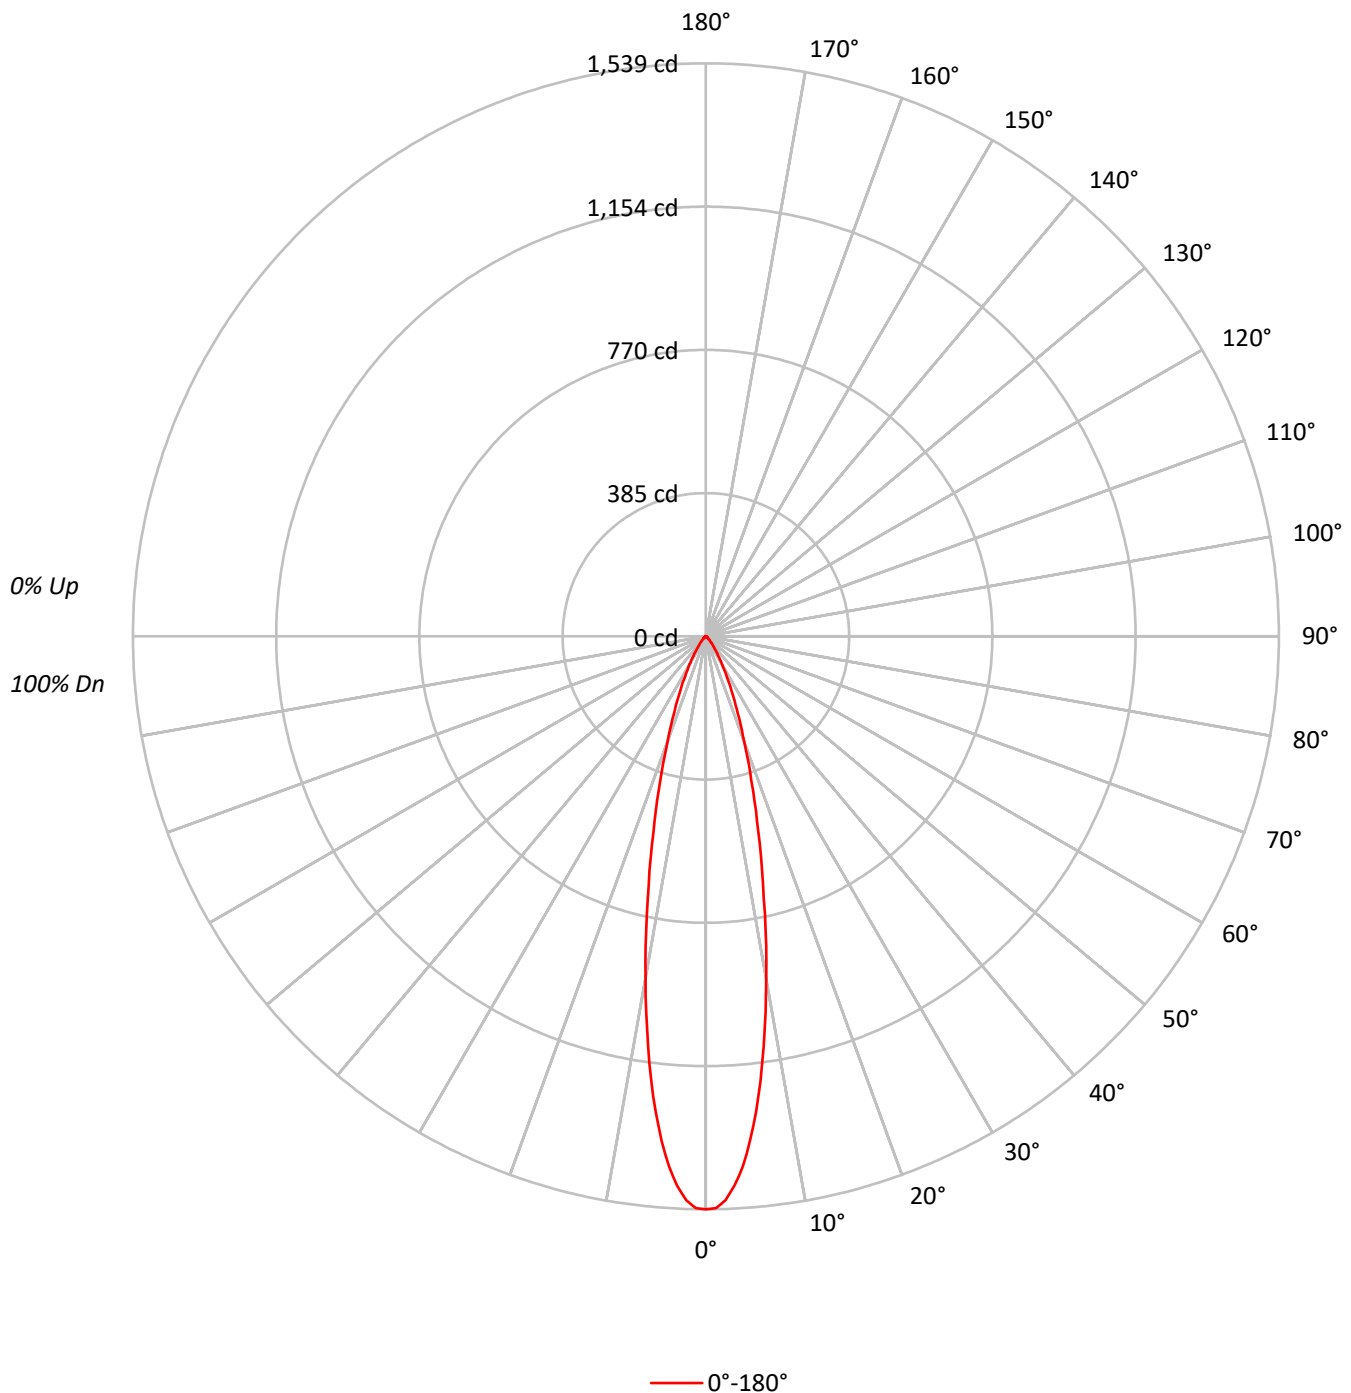

TEST NUMBER: P1284324

CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	95	91	87	83	80	77	74	72
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	91	87	83	80	77	74	72	69	67	65	63
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	87	83	80	77	74	72	69	67	65	63	61
3	106	101	97	93	104	99	96	93	97	94	91	94	92	90	92	90	88	87	83	79	76	73	70	67	65	63	61	59	57
4	102	96	92	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83	79	76	73	70	67	65	63	61	59	57	55
5	98	92	87	84	97	91	87	83	89	85	83	88	84	82	86	83	81	80	76	73	70	67	65	63	61	59	57	55	53
6	95	88	83	80	94	87	83	80	86	82	79	85	81	79	83	80	78	77	73	70	67	65	63	61	59	57	55	53	51
7	92	85	80	77	91	84	80	76	83	79	76	82	78	76	81	78	75	74	70	67	65	63	61	59	57	55	53	51	49
8	89	81	77	74	88	81	77	73	80	76	73	79	75	73	78	75	73	72	68	65	63	61	59	57	55	53	51	49	47
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69	65	63	61	59	57	55	53	51	49	47	45
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67	63	61	59	57	55	53	51	49	47	45	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	337429
5°	299515
10°	208012
15°	123020
20°	70053
25°	40043
30°	22155
35°	11805
40°	6527
45°	3535
50°	2217
55°	1759
60°	1491
65°	1401
70°	1218
75°	1271
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3535 cd/sqm

TEST NUMBER: P1284324

CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1GPH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.7	29.3
10°-20°	152.7	38.7
20°-30°	78.6	19.9
30°-40°	29.5	7.5
40°-50°	9.7	2.4
50°-60°	4.2	1.1
60°-70°	2.6	0.7
70°-80°	1.5	0.4
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	347.0	87.9
0°-40°	376.6	95.3
0°-60°	390.4	98.8
0°-90°	395.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	395.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1539	
5°	1361	116
15°	542	153
25°	166	79
35°	44	30
45°	11	10
55°	5	4
65°	3	3
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P1284324

CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1GPH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1538.8
1°	1535.8
2°	1515.6
3°	1477.2
4°	1426.6
5°	1360.7
6°	1286.2
7°	1204.3
8°	1113.4
9°	1023.6
10°	934.2
12.5°	718.8
15°	541.9
17.5°	405.6
20°	300.2
22.5°	224.1
25°	165.5
27.5°	120.6
30°	87.5
32.5°	62.0
35°	44.1
37.5°	31.6
40°	22.8
42.5°	16.4
45°	11.4
47.5°	8.4
50°	6.5
52.5°	5.3
55°	4.6
57.5°	3.8
60°	3.4
62.5°	3.0
65°	2.7
67.5°	2.3
70°	1.9
72.5°	1.9
75°	1.5
77.5°	1.1
80°	0.8
82.5°	0.8
85°	0.4
87.5°	0.0
90°	0.0

(END OF REPORT)