

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284336

Luminaire Tested: P3AS13R15B2750DE010 E3DL1LI_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284336
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R15B2750DE010 E3DL1LI_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 80CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 853.0 lumens
Efficiency: N/A
Efficacy: 44.7 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284336
CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1LI_5000K

Luminous Intensity Polar Plot

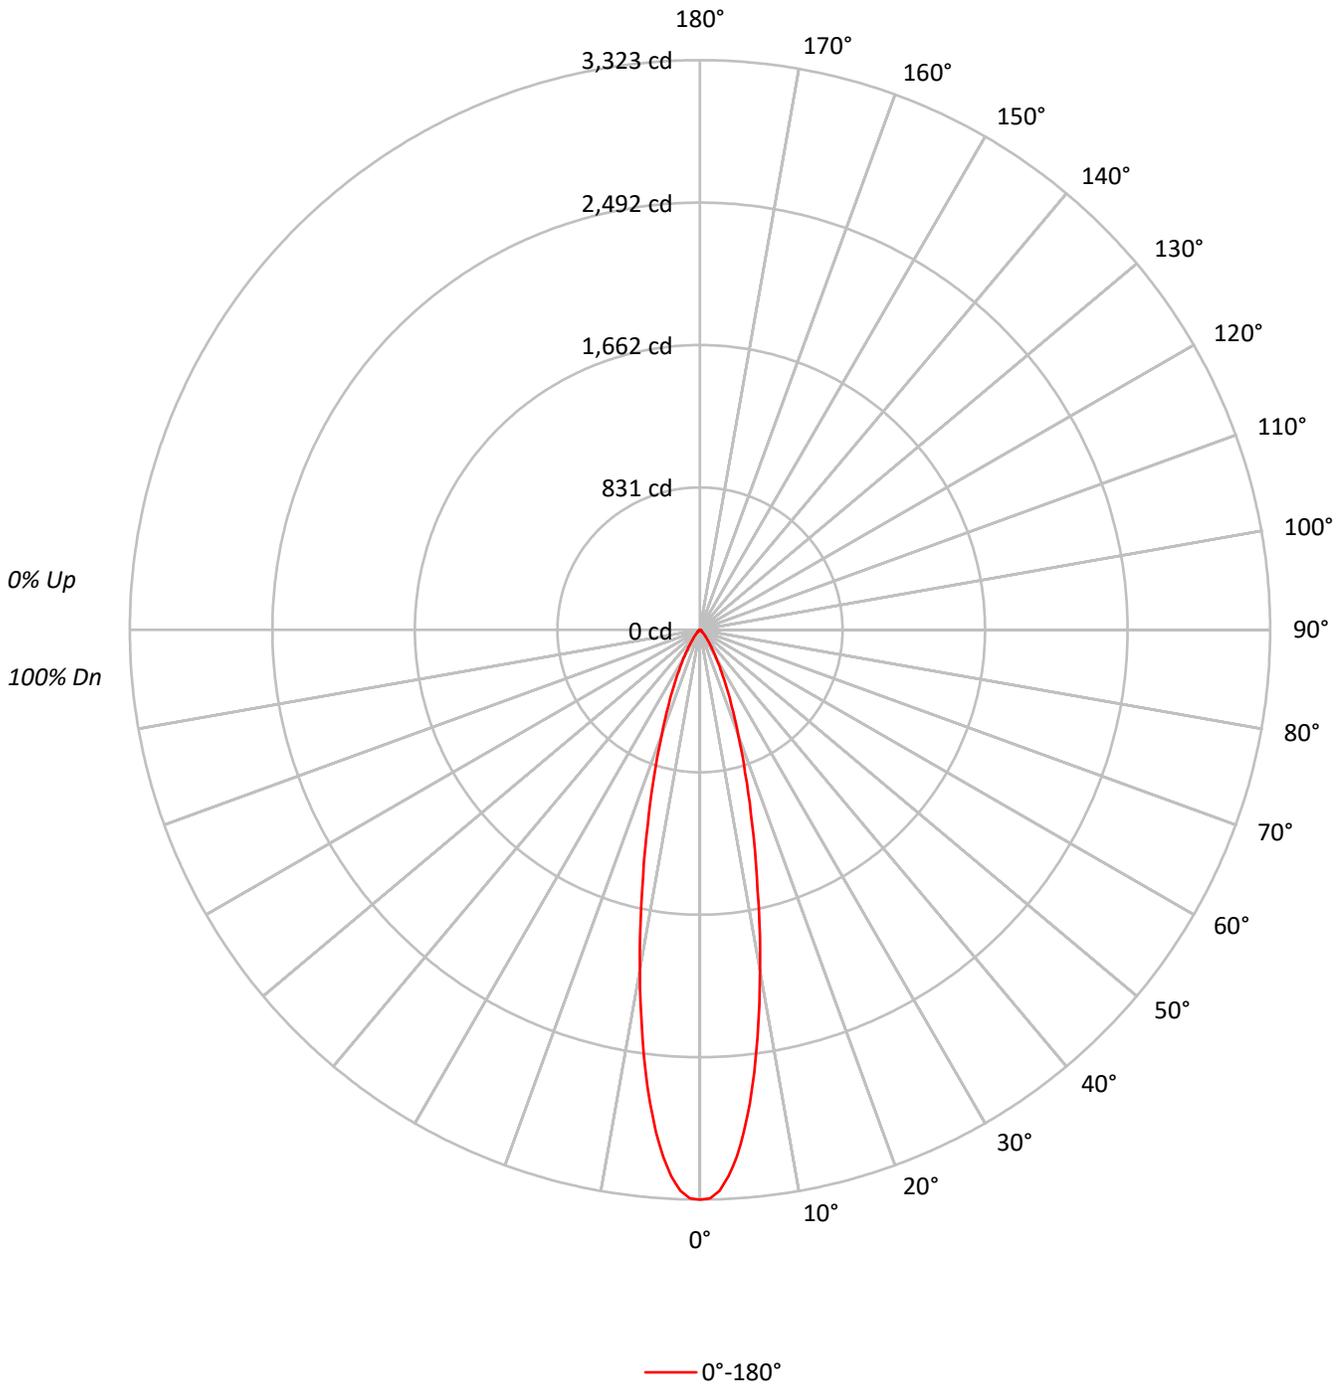



TEST NUMBER: P1284336
 CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1LI_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	91	91
3	106	101	97	93	104	99	96	93	97	94	91	94	92	90	92	90	88	87	87	87	87
4	102	96	92	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83	83	83	83
5	98	92	87	84	97	91	87	83	89	85	83	88	84	82	86	83	81	80	80	80	80
6	95	88	83	80	94	87	83	80	86	82	79	85	81	79	83	80	78	77	77	77	77
7	92	85	80	77	91	84	80	76	83	79	76	82	78	76	81	78	75	74	74	74	74
8	89	81	77	74	88	81	77	73	80	76	73	79	75	73	78	75	73	72	72	72	72
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69	69	69	69
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67	67	67	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	728692
5°	646818
10°	449179
15°	265631
20°	151283
25°	86497
30°	47855
35°	25511
40°	14112
45°	7660
50°	4776
55°	3785
60°	3245
65°	3009
70°	2629
75°	2796
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7660 cd/sqm



TEST NUMBER: P1284336
 CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1LI_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	249.9	29.3
10°-20°	329.8	38.7
20°-30°	169.8	19.9
30°-40°	63.7	7.5
40°-50°	20.9	2.4
50°-60°	9.0	1.1
60°-70°	5.7	0.7
70°-80°	3.4	0.4
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	749.5	87.9
0°-40°	813.2	95.3
0°-60°	843.1	98.8
0°-90°	853.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	853.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3323	
5°	2938	250
15°	1170	330
25°	358	170
35°	95	64
45°	25	21
55°	10	9
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1284336
CATALOG NUMBER: P3AS13R15B2750DE010 E3DL1LI_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	3323.1
1°	3316.5
2°	3272.9
3°	3190.0
4°	3080.7
5°	2938.5
6°	2777.4
7°	2600.8
8°	2404.4
9°	2210.5
10°	2017.3
12.5°	1552.2
15°	1170.1
17.5°	876.0
20°	648.3
22.5°	484.0
25°	357.5
27.5°	260.5
30°	189.0
32.5°	133.9
35°	95.3
37.5°	68.2
40°	49.3
42.5°	35.3
45°	24.7
47.5°	18.1
50°	14.0
52.5°	11.5
55°	9.9
57.5°	8.2
60°	7.4
62.5°	6.6
65°	5.8
67.5°	4.9
70°	4.1
72.5°	4.1
75°	3.3
77.5°	2.5
80°	1.6
82.5°	1.6
85°	0.8
87.5°	0.0
90°	0.0

(END OF REPORT)