

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284463

Luminaire Tested: P3AS13R20B2750DE010 E3D1LI_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284463
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R20B2750DE010 E3D1LI_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R20 optic, 3000K CCT AND, 90CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 948.0 lumens
Efficiency: N/A
Efficacy: 49.6 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284463

CATALOG NUMBER: P3AS13R20B2750DE010 E3D1LI_3000K

Luminous Intensity Polar Plot

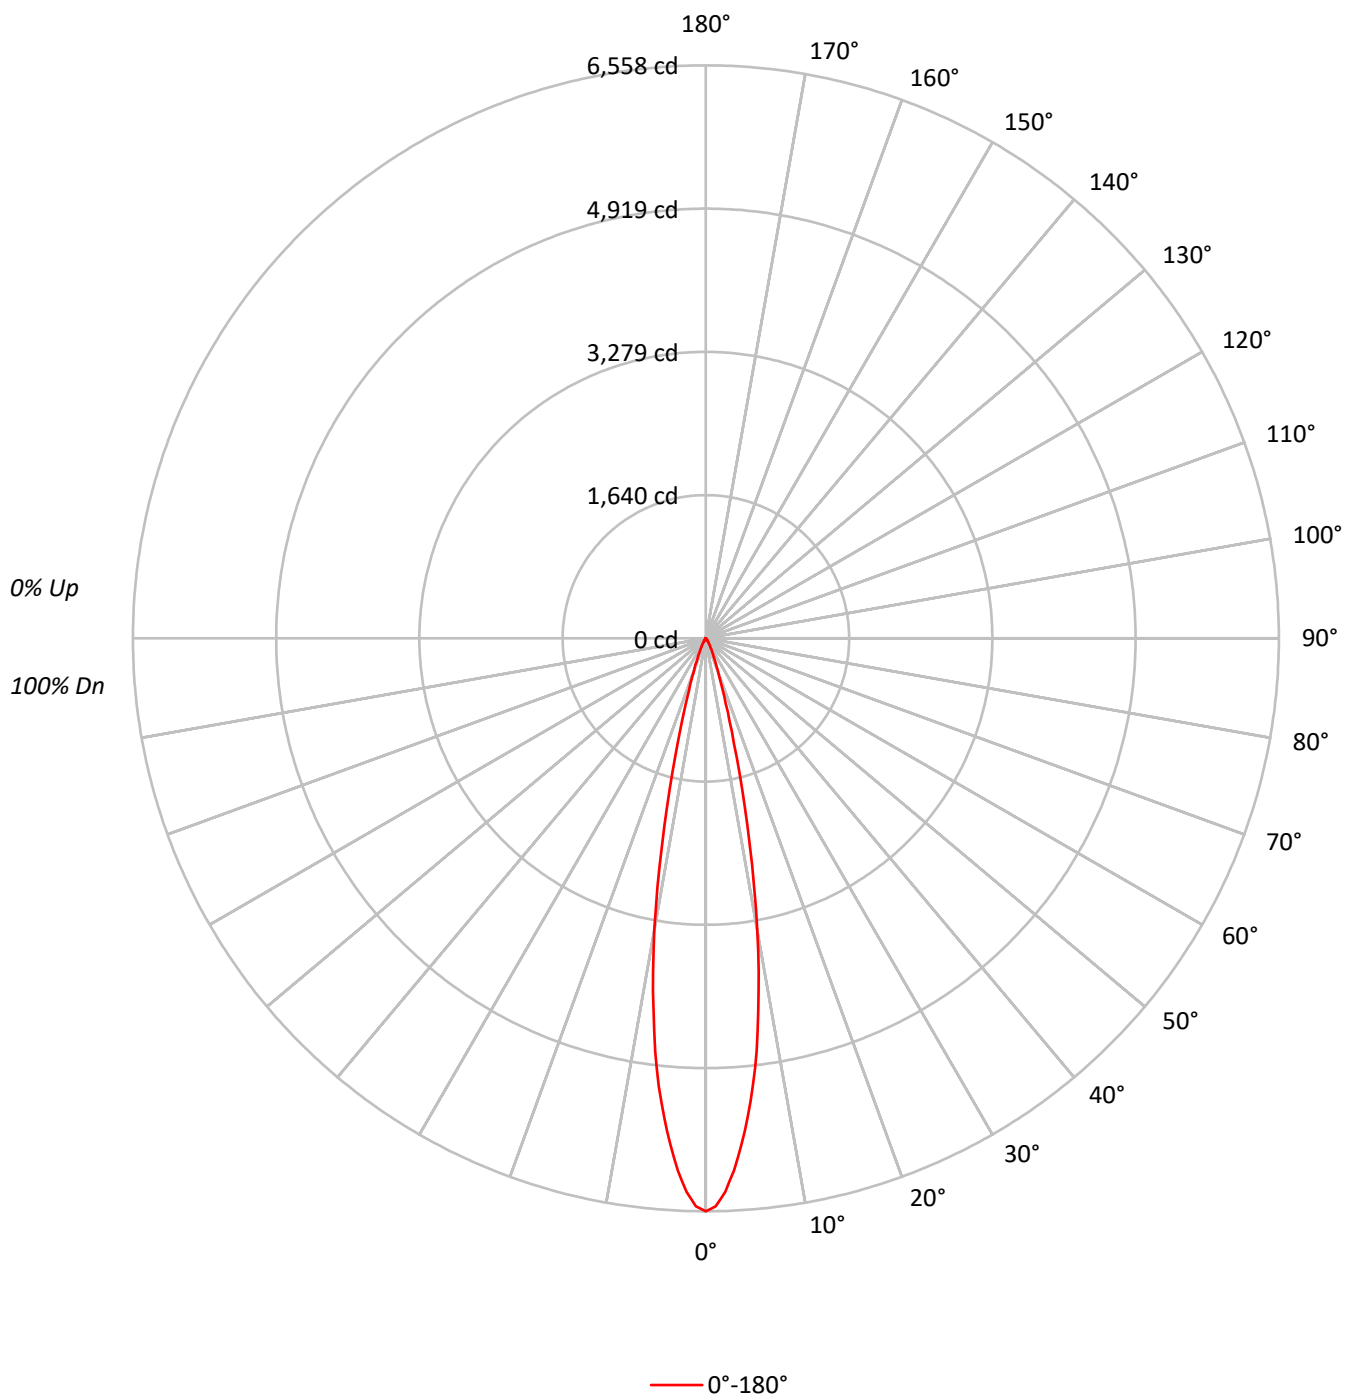

TEST NUMBER: P1284463

CATALOG NUMBER: P3AS13R20B2750DE010 E3D1LI_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100
1	115	114	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	97
2	112	109	106	104	110	107	105	103	104	102	101	101	100	98	99	98	96	95	95	95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	93	93
4	106	101	98	95	105	100	97	95	99	96	94	97	95	93	95	93	92	91	91	91
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	90	89	89	89
6	101	96	92	89	100	95	92	89	94	91	89	93	90	88	92	89	88	87	87	87
7	99	93	90	87	98	93	89	87	92	89	86	91	88	86	90	87	86	85	85	85
8	97	91	87	85	96	91	87	85	90	87	85	89	86	84	88	86	84	83	83	83
9	95	89	85	83	94	89	85	83	88	85	83	87	84	83	87	84	82	81	81	81
10	93	87	84	81	92	87	83	81	86	83	81	86	83	81	85	83	81	80	80	80

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1438043
5°	1210761
10°	756232
15°	282726
20°	97052
25°	40454
30°	19041
35°	8539
40°	4036
45°	2078
50°	751
55°	153
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2078 cd/sqm

TEST NUMBER: P1284463

CATALOG NUMBER: P3AS13R20B2750DE010 E3D1LI_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	457.4	48.2
10°-20°	376.8	39.7
20°-30°	85.6	9.0
30°-40°	21.8	2.3
40°-50°	5.5	0.6
50°-60°	0.7	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	919.8	97.0
0°-40°	941.6	99.3
0°-60°	947.8	100.0
0°-90°	948.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	948.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6558	
5°	5500	457
15°	1245	377
25°	167	86
35°	32	22
45°	7	5
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1284463

CATALOG NUMBER: P3AS13R20B2750DE010 E3D1LI_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	6558.0
1°	6502.4
2°	6338.6
3°	6103.6
4°	5815.2
5°	5500.5
6°	5149.9
7°	4762.9
8°	4311.4
9°	3864.1
10°	3396.3
11°	2898.5
12°	2401.5
13°	1980.4
14°	1577.9
15°	1245.4
16°	983.0
17°	775.4
18°	623.1
19°	506.7
20°	415.9
21°	347.7
22°	290.2
23°	241.3
24°	201.3
25°	167.2
27.5°	109.3
30°	75.2
32.5°	46.3
35°	31.9
37.5°	20.4
40°	14.1
42.5°	9.6
45°	6.7
47.5°	4.4
50°	2.2
52.5°	1.1
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1284463

CATALOG NUMBER: P3AS13R20B2750DE010 E3D1LI_3000K

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)