

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284485

Luminaire Tested: P3AS13R20B2750DE010 E3DL1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284485
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R20B2750DE010 E3DL1GPH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R20 optic, 4000K CCT AND, 80CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 390.0 lumens
Efficiency: N/A
Efficacy: 20.4 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284485
CATALOG NUMBER: P3AS13R20B2750DE010 E3DL1GPH_4000K

Luminous Intensity Polar Plot

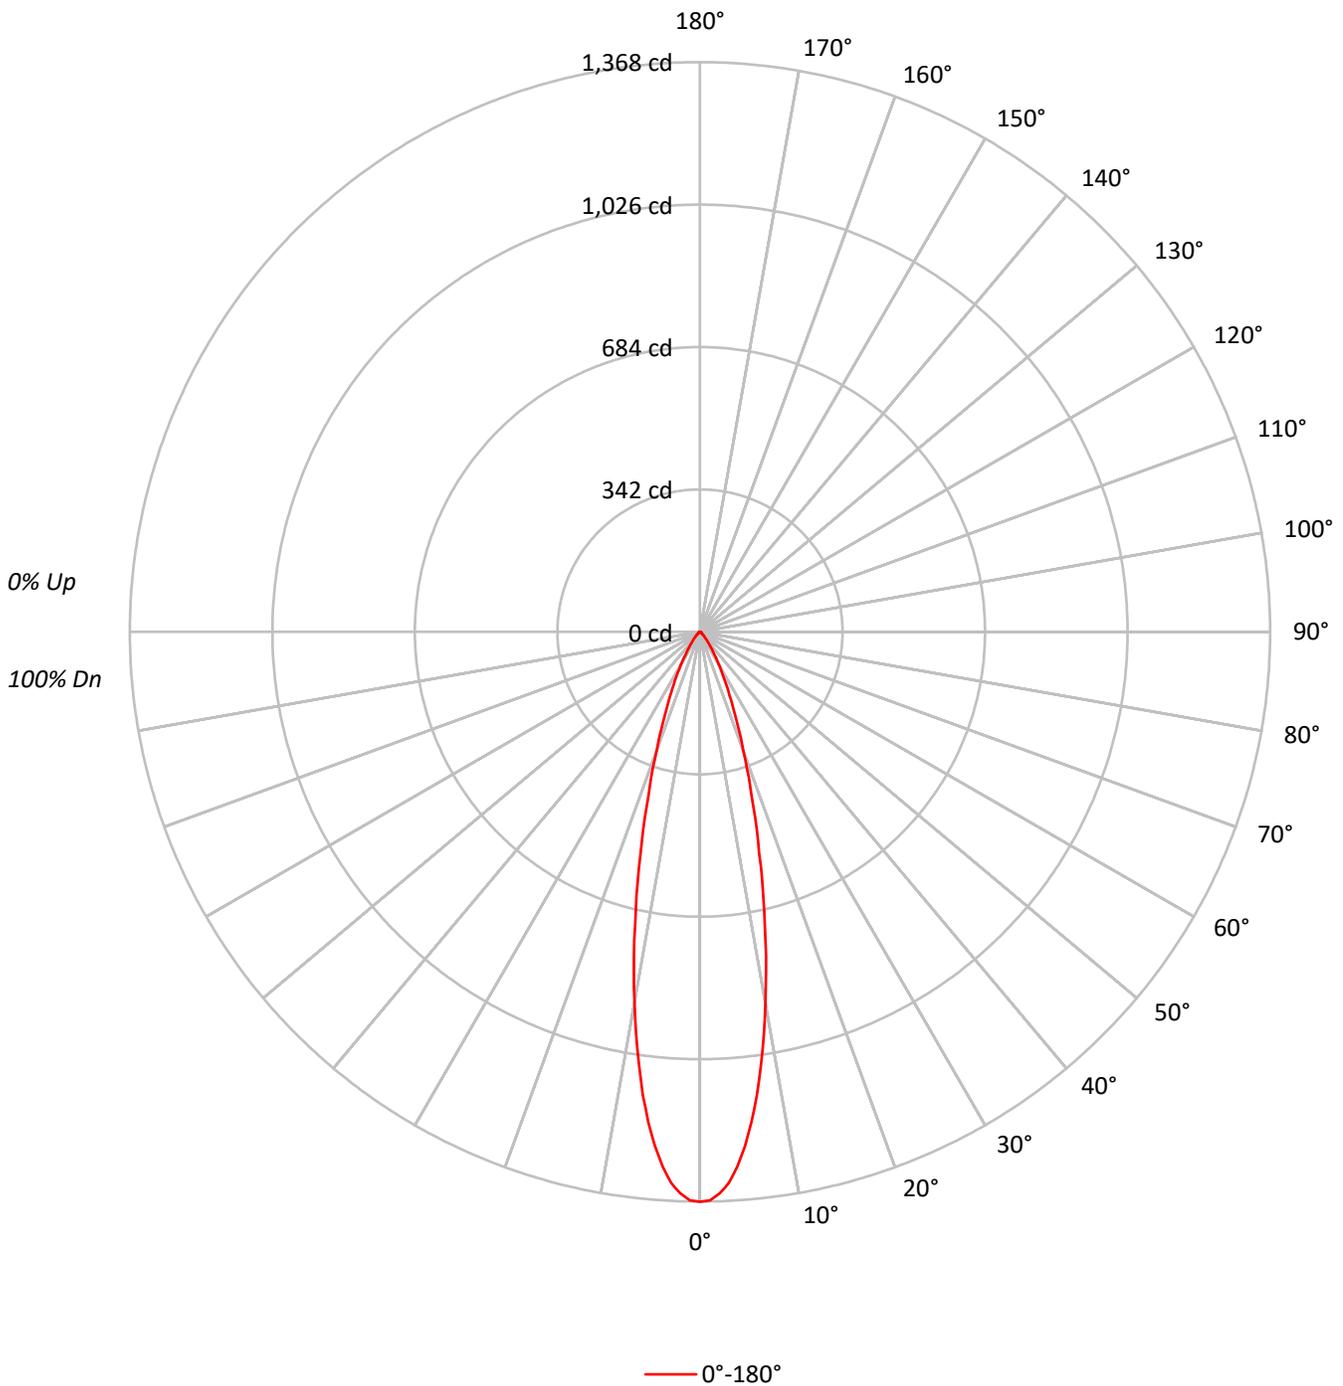



TEST NUMBER: P1284485
 CATALOG NUMBER: P3AS13R20B2750DE010 E3DL1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	77	74	72	71
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	300064
5°	272771
10°	201577
15°	124700
20°	71220
25°	40648
30°	22788
35°	12394
40°	6784
45°	3752
50°	2183
55°	1567
60°	1491
65°	1349
70°	1218
75°	1271
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3752 cd/sqm



TEST NUMBER: P1284485

CATALOG NUMBER: P3AS13R20B2750DE010 E3DL1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.3	27.5
10°-20°	153.2	39.3
20°-30°	80.0	20.5
30°-40°	30.9	7.9
40°-50°	10.1	2.6
50°-60°	3.9	1.0
60°-70°	2.6	0.7
70°-80°	1.5	0.4
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	340.4	87.3
0°-40°	371.3	95.2
0°-60°	385.3	98.8
0°-90°	390.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	390.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1368	
5°	1239	107
15°	549	153
25°	168	80
35°	46	31
45°	12	10
55°	4	4
65°	3	3
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1284485
CATALOG NUMBER: P3AS13R20B2750DE010 E3DL1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1368.4
1°	1365.7
2°	1349.5
3°	1324.7
4°	1286.3
5°	1239.2
6°	1183.4
7°	1121.6
8°	1050.0
9°	980.3
10°	905.3
12.5°	719.6
15°	549.3
17.5°	411.0
20°	305.2
22.5°	226.1
25°	168.0
27.5°	124.0
30°	90.0
32.5°	65.2
35°	46.3
37.5°	33.5
40°	23.7
42.5°	17.0
45°	12.1
47.5°	8.7
50°	6.4
52.5°	4.9
55°	4.1
57.5°	3.8
60°	3.4
62.5°	3.0
65°	2.6
67.5°	2.3
70°	1.9
72.5°	1.9
75°	1.5
77.5°	1.1
80°	0.8
82.5°	0.8
85°	0.4
87.5°	0.4
90°	0.0

(END OF REPORT)