

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284555

Luminaire Tested: P3AS13R20B2750DE010 E3PHLP1MW_4000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284555
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R20B2750DE010 E3PHLP1MW_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R20 optic, 4000K CCT AND, 80CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 377.0 lumens
Efficiency: N/A
Efficacy: 19.7 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 0.55 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284555
CATALOG NUMBER: P3AS13R20B2750DE010 E3PHLP1MW_4000K

Luminous Intensity Polar Plot

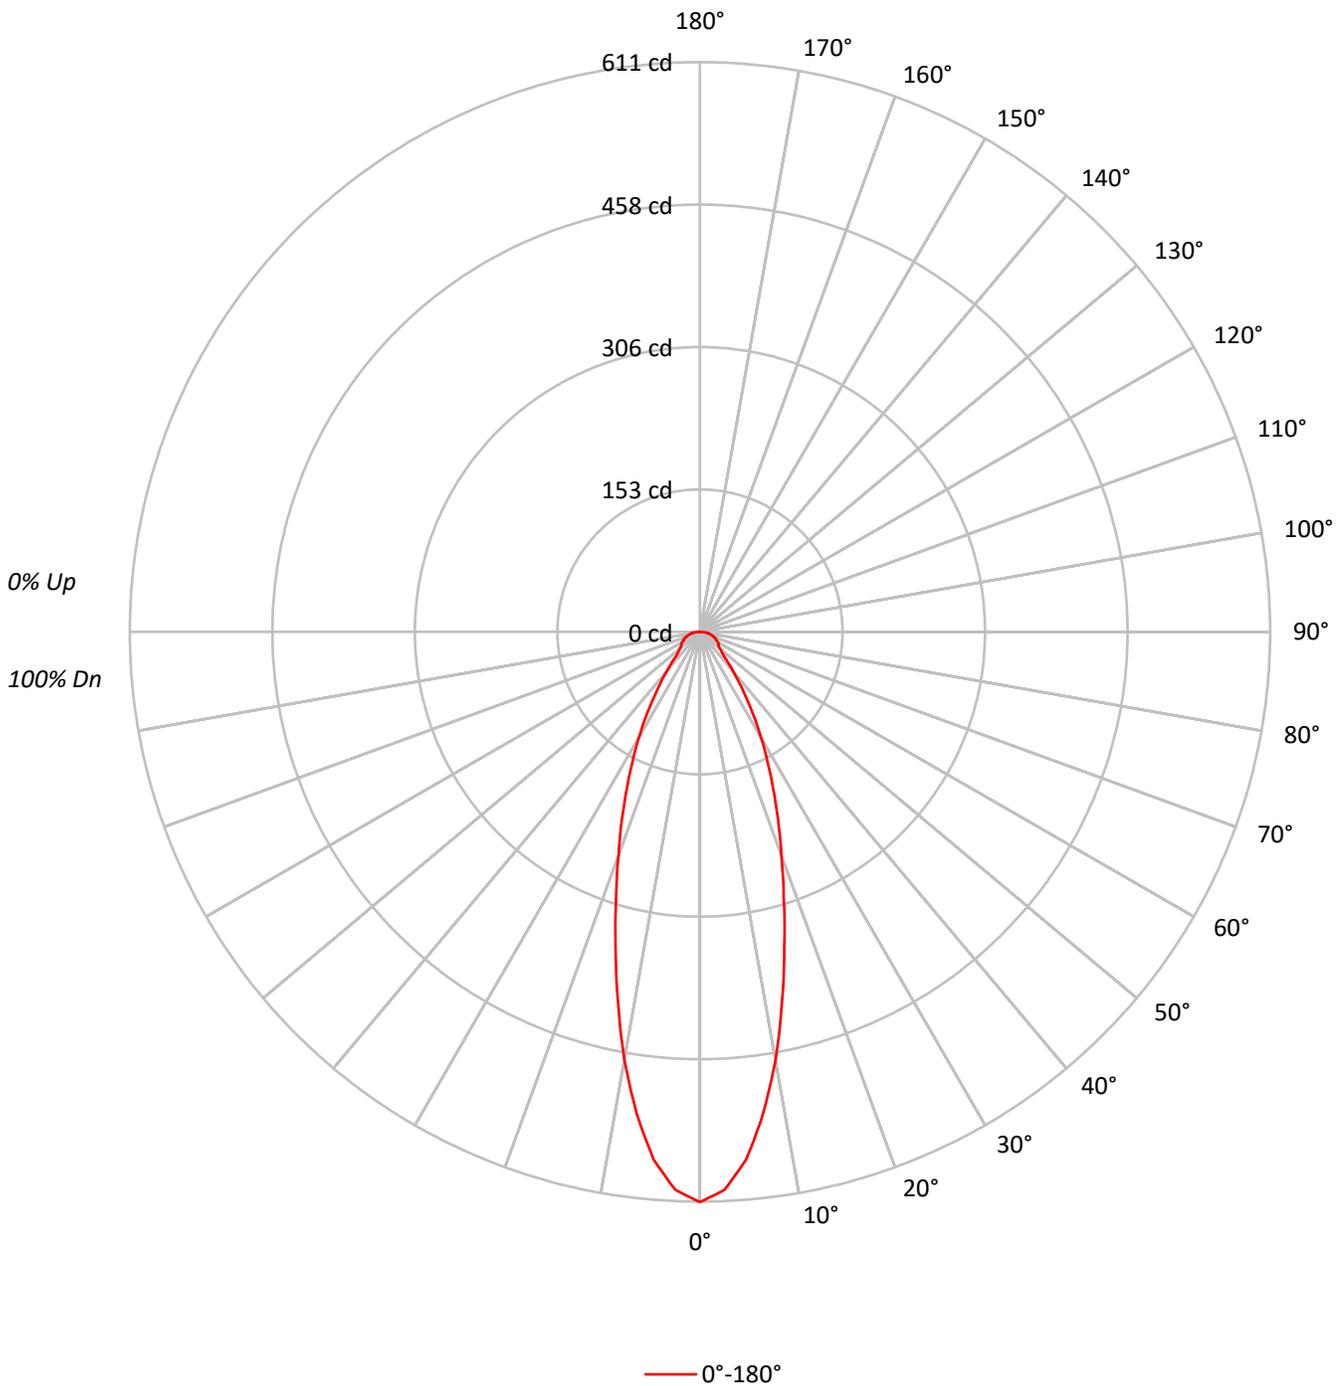



TEST NUMBER: P1284555

CATALOG NUMBER: P3AS13R20B2750DE010 E3PHLP1MW_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90				90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81				81
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74				74
4	93	84	78	73	91	83	77	73	81	76	72	79	74	71	77	73	70	68				68
5	88	79	72	67	86	78	71	67	76	70	66	74	69	66	72	68	65	63				63
6	84	74	67	62	82	73	66	62	71	66	61	70	65	61	68	64	61	59				59
7	79	69	63	58	78	68	62	58	67	62	57	66	61	57	65	60	57	55				55
8	76	65	59	54	74	65	58	54	64	58	54	62	57	54	61	57	53	52				52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49				49
10	69	59	52	48	68	58	52	48	57	52	48	57	52	48	56	51	48	46				46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	134068
5°	125049
10°	103761
15°	79342
20°	59552
25°	44833
30°	33144
35°	23155
40°	15887
45°	11009
50°	9450
55°	9328
60°	9736
65°	9806
70°	9938
75°	10336
80°	11239
85°	11070

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 82.5°
 Luminance: 13104 cd/sqm



TEST NUMBER: P1284555

CATALOG NUMBER: P3AS13R20B2750DE010 E3PHLP1MW_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.9	13.5
10°-20°	97.2	25.8
20°-30°	85.5	22.7
30°-40°	55.2	14.6
40°-50°	29.3	7.8
50°-60°	22.0	5.8
60°-70°	18.7	5.0
70°-80°	13.2	3.5
80°-90°	5.1	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	233.6	62.0
0°-40°	288.8	76.6
0°-60°	340.0	90.2
0°-90°	377.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	377.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	611	
5°	568	51
15°	350	97
25°	185	86
35°	86	55
45°	36	29
55°	24	22
65°	19	19
75°	12	13
85°	4	5
90°	0	



TEST NUMBER: P1284555
CATALOG NUMBER: P3AS13R20B2750DE010 E3PHLP1MW_4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	611.4
2.5°	599.2
5°	568.1
7.5°	520.4
10°	466.0
12.5°	406.1
15°	349.5
17.5°	298.5
20°	255.2
22.5°	218.6
25°	185.3
27.5°	156.5
30°	130.9
32.5°	107.6
35°	86.5
37.5°	69.9
40°	55.5
42.5°	44.4
45°	35.5
47.5°	31.1
50°	27.7
52.5°	25.5
55°	24.4
57.5°	23.3
60°	22.2
62.5°	20.0
65°	18.9
67.5°	17.8
70°	15.5
72.5°	14.4
75°	12.2
77.5°	11.1
80°	8.9
82.5°	7.8
85°	4.4
87.5°	2.2
90°	0.0

(END OF REPORT)