

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284619

Luminaire Tested: P3AS13R25B2750DE010 E3DL1H_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284619
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R25B2750DE010 E3DL1H_3500K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R25 optic, 3500K CCT AND, 80CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 812.0 lumens
Efficiency: N/A
Efficacy: 42.5 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284619

CATALOG NUMBER: P3AS13R25B2750DE010 E3DL1H_3500K

Luminous Intensity Polar Plot

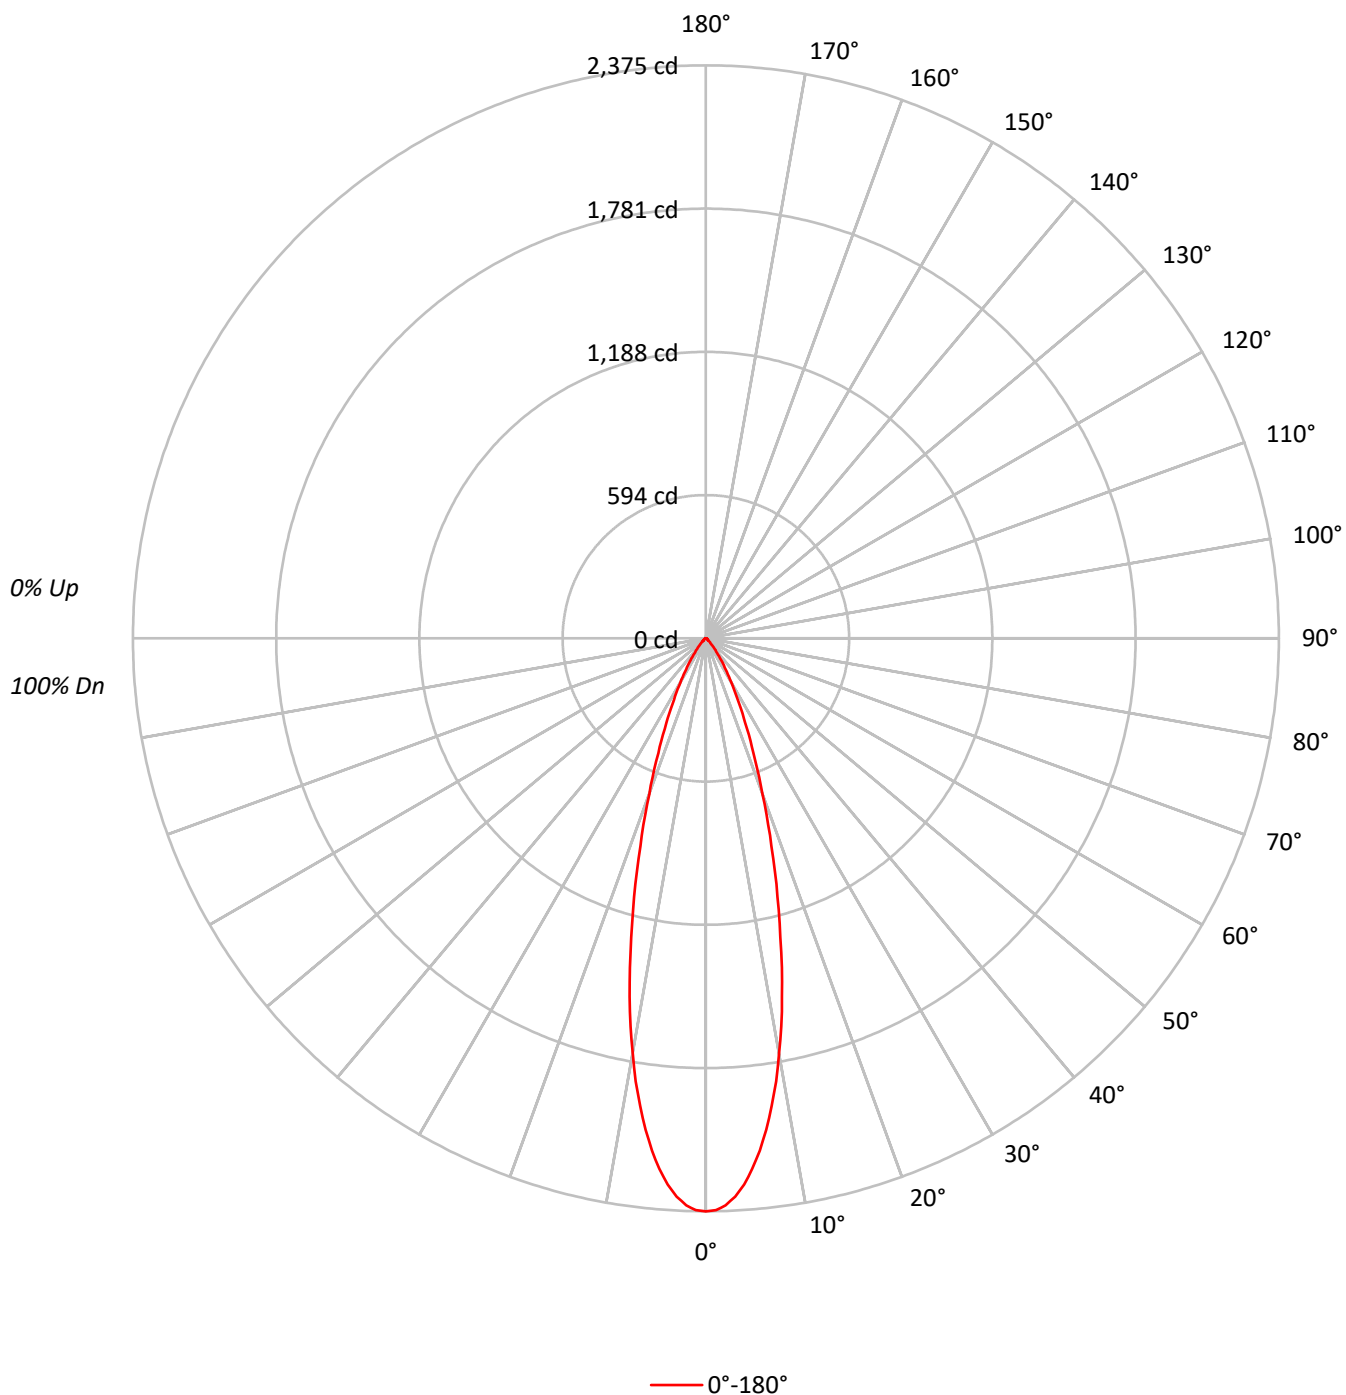

TEST NUMBER: P1284619

CATALOG NUMBER: P3AS13R25B2750DE010 E3DL1H_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95	93	92	90
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91	89	87	86
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88	85	83	82
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85	82	79	78
6	94	86	81	78	92	86	81	78	84	80	77		83	79	77		82	78	76	75
7	90	83	78	74	89	82	77	74	81	77	74		80	76	73		79	75	73	72
8	87	79	74	71	86	79	74	71	78	74	71		77	73	70		76	73	70	69
9	84	76	71	68	83	76	71	68	75	71	68		74	70	68		73	70	67	66
10	81	73	69	65	80	73	68	65	72	68	65		72	68	65		71	67	65	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	520857
5°	485955
10°	389282
15°	264247
20°	159894
25°	93489
30°	53249
35°	29286
40°	15543
45°	8187
50°	4776
55°	3555
60°	3070
65°	3217
70°	3013
75°	2626
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 8187 cd/sqm

TEST NUMBER: P1284619

CATALOG NUMBER: P3AS13R25B2750DE010 E3DL1H_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.9	24.1
10°-20°	320.0	39.4
20°-30°	182.9	22.5
30°-40°	72.2	8.9
40°-50°	22.1	2.7
50°-60°	8.7	1.1
60°-70°	5.9	0.7
70°-80°	3.3	0.4
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	698.8	86.1
0°-40°	770.9	94.9
0°-60°	801.8	98.7
0°-90°	812.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	812.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2375	
5°	2208	196
15°	1164	320
25°	386	183
35°	109	72
45°	26	22
55°	9	9
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1284619

CATALOG NUMBER: P3AS13R25B2750DE010 E3DL1H_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2375.3
1°	2370.7
2°	2351.3
3°	2317.1
4°	2269.8
5°	2207.7
6°	2134.8
7°	2052.5
8°	1957.1
9°	1859.3
10°	1748.3
11°	1638.9
12°	1518.6
13°	1399.9
14°	1278.1
15°	1164.0
17.5°	902.5
20°	685.2
22.5°	514.5
25°	386.4
27.5°	286.3
30°	210.3
32.5°	152.1
35°	109.4
37.5°	77.6
40°	54.3
42.5°	37.2
45°	26.4
47.5°	18.6
50°	14.0
52.5°	10.9
55°	9.3
57.5°	8.5
60°	7.0
62.5°	6.2
65°	6.2
67.5°	5.4
70°	4.7
72.5°	3.9
75°	3.1
77.5°	2.3
80°	1.6
82.5°	1.6
85°	0.8
87.5°	0.8



TEST NUMBER: P1284619

CATALOG NUMBER: P3AS13R25B2750DE010 E3DL1H_3500K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)