

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284642

Luminaire Tested: P3AS13R25B2750DE010 E3DLD1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284642
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R25B2750DE010 E3DLD1GPH_2700K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 302.0 lumens
Efficiency: N/A
Efficacy: 15.8 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284642

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1GPH_2700K

Luminous Intensity Polar Plot

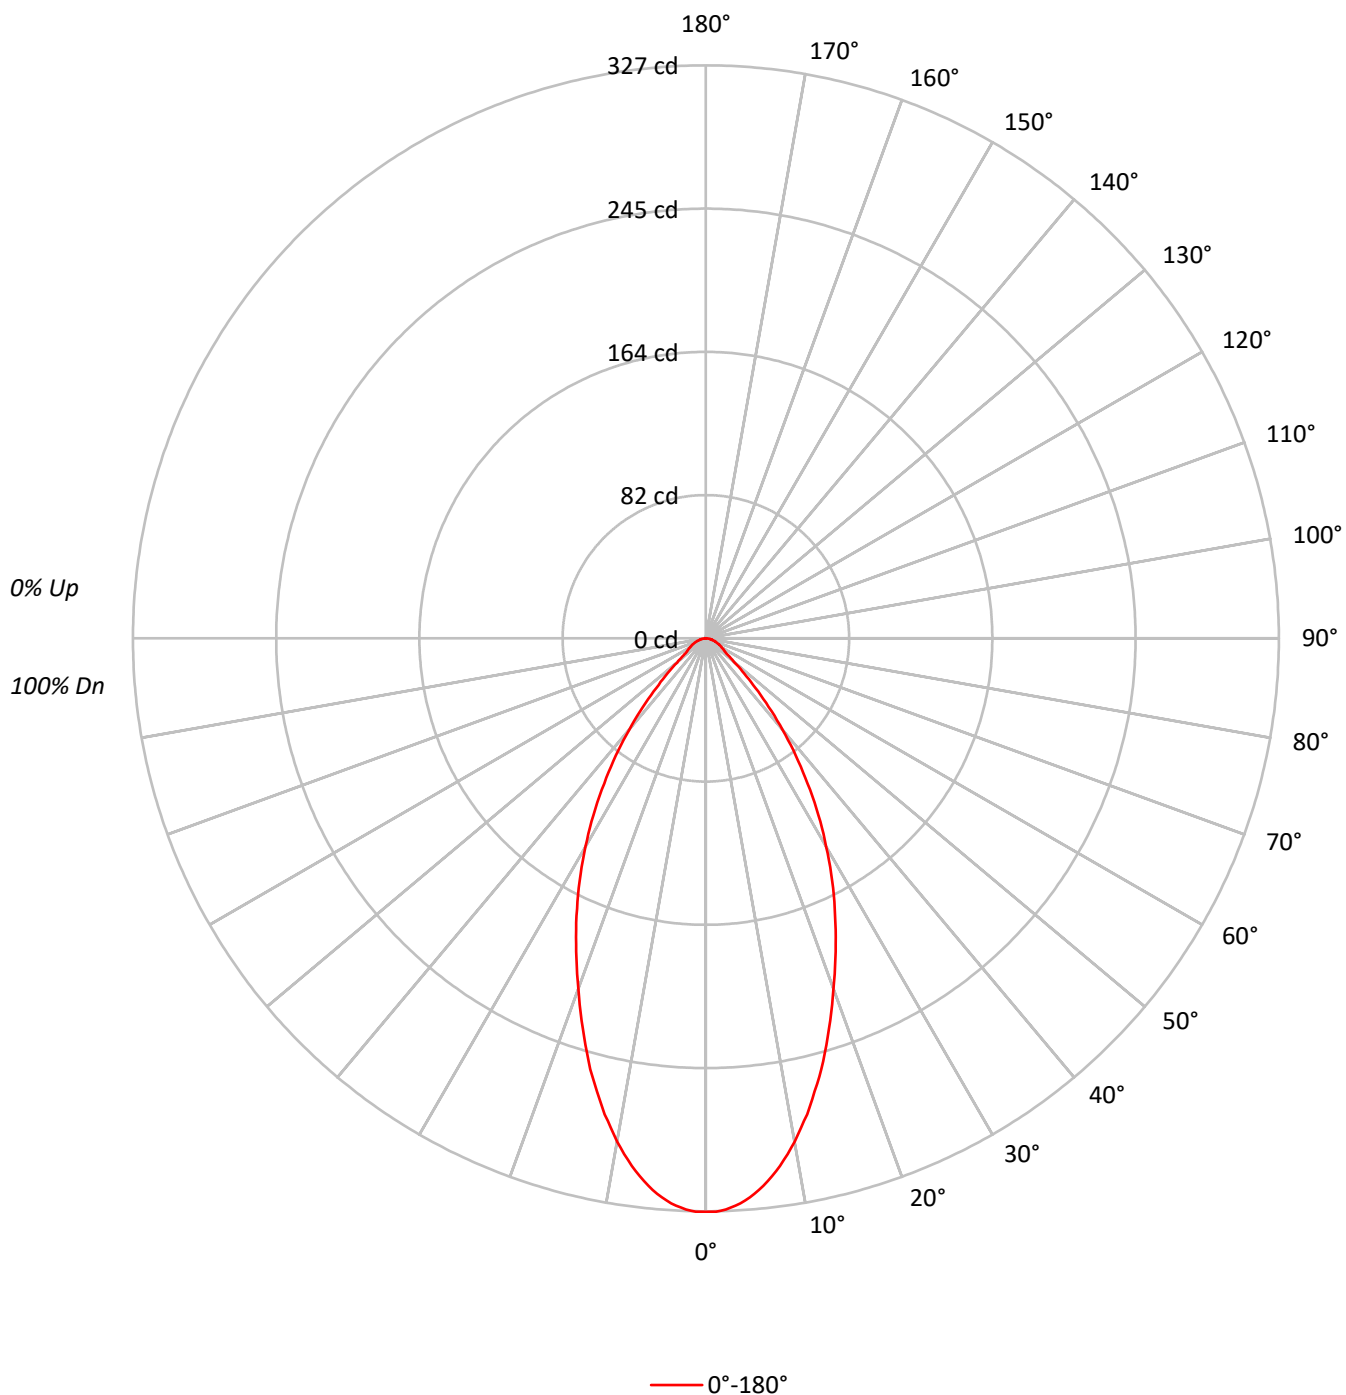

TEST NUMBER: P1284642

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91		
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83		
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	83	80	78	76		
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70		
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64		
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59		
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55		
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51		
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48		
10	68	57	51	47	67	57	51	47	56	50	47	55	50	46	54	50	46	45		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	71771
5°	70064
10°	64929
15°	57821
20°	49681
25°	42244
30°	34765
35°	27090
40°	19494
45°	12373
50°	7300
55°	5046
60°	4605
65°	4307
70°	3847
75°	3474
80°	3283
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12373 cd/sqm

TEST NUMBER: P1284642

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.5	9.8
10°-20°	70.7	23.4
20°-30°	79.9	26.5
30°-40°	63.2	20.9
40°-50°	31.9	10.6
50°-60°	12.8	4.2
60°-70°	8.2	2.7
70°-80°	4.5	1.5
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	180.1	59.7
0°-40°	243.3	80.6
0°-60°	288.0	95.4
0°-90°	302.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	302.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	327	
5°	318	30
15°	255	71
25°	175	80
35°	101	63
45°	40	32
55°	13	13
65°	8	8
75°	4	5
85°	1	1
90°	0	

TEST NUMBER: P1284642

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	327.3
1°	327.3
2°	326.2
3°	324.3
4°	321.7
5°	318.3
6°	314.2
7°	309.3
8°	304.0
9°	298.0
10°	291.6
11°	284.4
12°	277.7
13°	269.8
14°	262.2
15°	254.7
17.5°	233.6
20°	212.9
22.5°	193.4
25°	174.6
27.5°	156.1
30°	137.3
32.5°	119.6
35°	101.2
37.5°	84.3
40°	68.1
42.5°	53.0
45°	39.9
47.5°	29.7
50°	21.4
52.5°	16.2
55°	13.2
57.5°	12.0
60°	10.5
62.5°	9.4
65°	8.3
67.5°	7.1
70°	6.0
72.5°	5.3
75°	4.1
77.5°	3.4
80°	2.6
82.5°	1.9
85°	1.1
87.5°	0.4



TEST NUMBER: P1284642

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1GPH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)