

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284664

Luminaire Tested: P3AS13R25B2750DE010 E3DLD1WH\_3500K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1284664  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R25B2750DE010 E3DLD1WH\_3500K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R25 optic, 3500K CCT AND, 80CRI , E3DLD1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 623.0 lumens  
Efficiency: N/A  
Efficacy: 32.6 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1284664

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1WH\_3500K

### Luminous Intensity Polar Plot

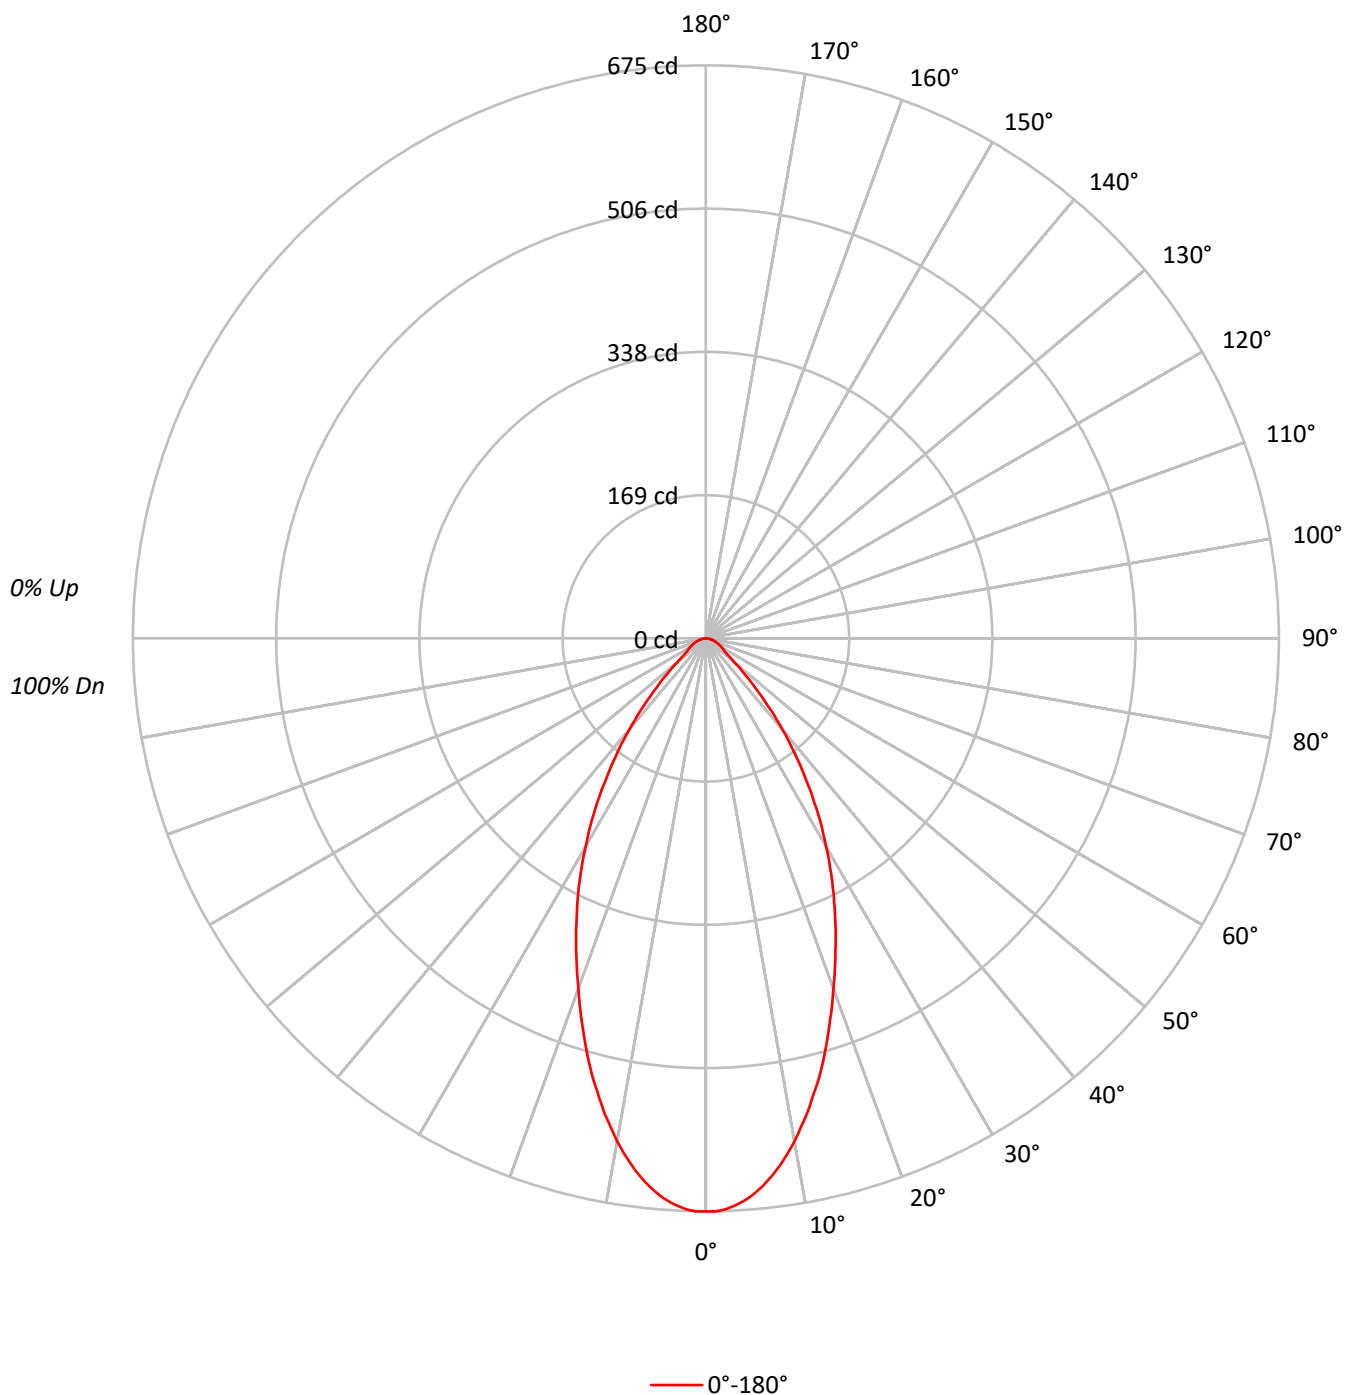

TEST NUMBER: P1284664

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1WH\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99  |  | 99  | 98  | 96  |  | 96  |
| 2   | 106 | 100 | 96  | 92  | 104 | 99  | 94  | 91  | 95  | 92  | 89  |  | 92  | 89  | 87  |  | 89  |
| 3   | 100 | 92  | 87  | 82  | 98  | 91  | 86  | 82  | 88  | 84  | 80  |  | 86  | 82  | 79  |  | 83  |
| 4   | 94  | 85  | 79  | 74  | 92  | 84  | 78  | 74  | 82  | 77  | 73  |  | 80  | 76  | 72  |  | 78  |
| 5   | 89  | 79  | 73  | 68  | 87  | 78  | 72  | 68  | 76  | 71  | 67  |  | 75  | 70  | 66  |  | 73  |
| 6   | 84  | 74  | 67  | 62  | 82  | 73  | 67  | 62  | 71  | 66  | 62  |  | 70  | 65  | 61  |  | 69  |
| 7   | 79  | 69  | 62  | 58  | 78  | 68  | 62  | 58  | 67  | 61  | 57  |  | 66  | 61  | 57  |  | 65  |
| 8   | 75  | 65  | 58  | 54  | 74  | 64  | 58  | 53  | 63  | 57  | 53  |  | 62  | 57  | 53  |  | 61  |
| 9   | 71  | 61  | 54  | 50  | 70  | 60  | 54  | 50  | 59  | 54  | 50  |  | 58  | 53  | 50  |  | 57  |
| 10  | 68  | 57  | 51  | 47  | 67  | 57  | 51  | 47  | 56  | 50  | 47  |  | 55  | 50  | 46  |  | 54  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 148058 |
| 5°  | 144530 |
| 10° | 133932 |
| 15° | 119274 |
| 20° | 102512 |
| 25° | 87126  |
| 30° | 71733  |
| 35° | 55894  |
| 40° | 40218  |
| 45° | 25522  |
| 50° | 15078  |
| 55° | 10399  |
| 60° | 9517   |
| 65° | 8873   |
| 70° | 7950   |
| 75° | 7202   |
| 80° | 6819   |
| 85° | 5787   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 25522 cd/sqm

TEST NUMBER: P1284664

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1WH\_3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 60.9   | 9.8       |
| 10°-20°   | 145.9  | 23.4      |
| 20°-30°   | 164.8  | 26.5      |
| 30°-40°   | 130.4  | 20.9      |
| 40°-50°   | 65.8   | 10.6      |
| 50°-60°   | 26.4   | 4.2       |
| 60°-70°   | 16.9   | 2.7       |
| 70°-80°   | 9.3    | 1.5       |
| 80°-90°   | 2.6    | 0.4       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 371.6  | 59.6      |
| 0°-40°    | 502.0  | 80.6      |
| 0°-60°    | 594.2  | 95.4      |
| 0°-90°    | 623.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 623.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 675 |      |
| 5°  | 657 | 61   |
| 15° | 525 | 146  |
| 25° | 360 | 165  |
| 35° | 209 | 130  |
| 45° | 82  | 66   |
| 55° | 27  | 26   |
| 65° | 17  | 17   |
| 75° | 8   | 9    |
| 85° | 2   | 3    |
| 90° | 0   |      |

TEST NUMBER: P1284664

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1WH\_3500K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 675.2 |
| 1°    | 675.2 |
| 2°    | 672.9 |
| 3°    | 669.0 |
| 4°    | 663.6 |
| 5°    | 656.6 |
| 6°    | 648.1 |
| 7°    | 638.0 |
| 8°    | 627.1 |
| 9°    | 614.7 |
| 10°   | 601.5 |
| 11°   | 586.8 |
| 12°   | 572.8 |
| 13°   | 556.5 |
| 14°   | 541.0 |
| 15°   | 525.4 |
| 17.5° | 482.0 |
| 20°   | 439.3 |
| 22.5° | 398.9 |
| 25°   | 360.1 |
| 27.5° | 322.1 |
| 30°   | 283.3 |
| 32.5° | 246.8 |
| 35°   | 208.8 |
| 37.5° | 173.9 |
| 40°   | 140.5 |
| 42.5° | 109.4 |
| 45°   | 82.3  |
| 47.5° | 61.3  |
| 50°   | 44.2  |
| 52.5° | 33.4  |
| 55°   | 27.2  |
| 57.5° | 24.8  |
| 60°   | 21.7  |
| 62.5° | 19.4  |
| 65°   | 17.1  |
| 67.5° | 14.7  |
| 70°   | 12.4  |
| 72.5° | 10.9  |
| 75°   | 8.5   |
| 77.5° | 7.0   |
| 80°   | 5.4   |
| 82.5° | 3.9   |
| 85°   | 2.3   |
| 87.5° | 0.8   |



TEST NUMBER: P1284664

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLD1WH\_3500K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)