

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284691

Luminaire Tested: P3AS13R25B2750DE010 E3DLP1MW_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284691
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R25B2750DE010 E3DLP1MW_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R25 optic, 5000K CCT AND, 80CRI , E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 527.0 lumens
Efficiency: N/A
Efficacy: 27.6 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284691

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLP1MW_5000K

Luminous Intensity Polar Plot

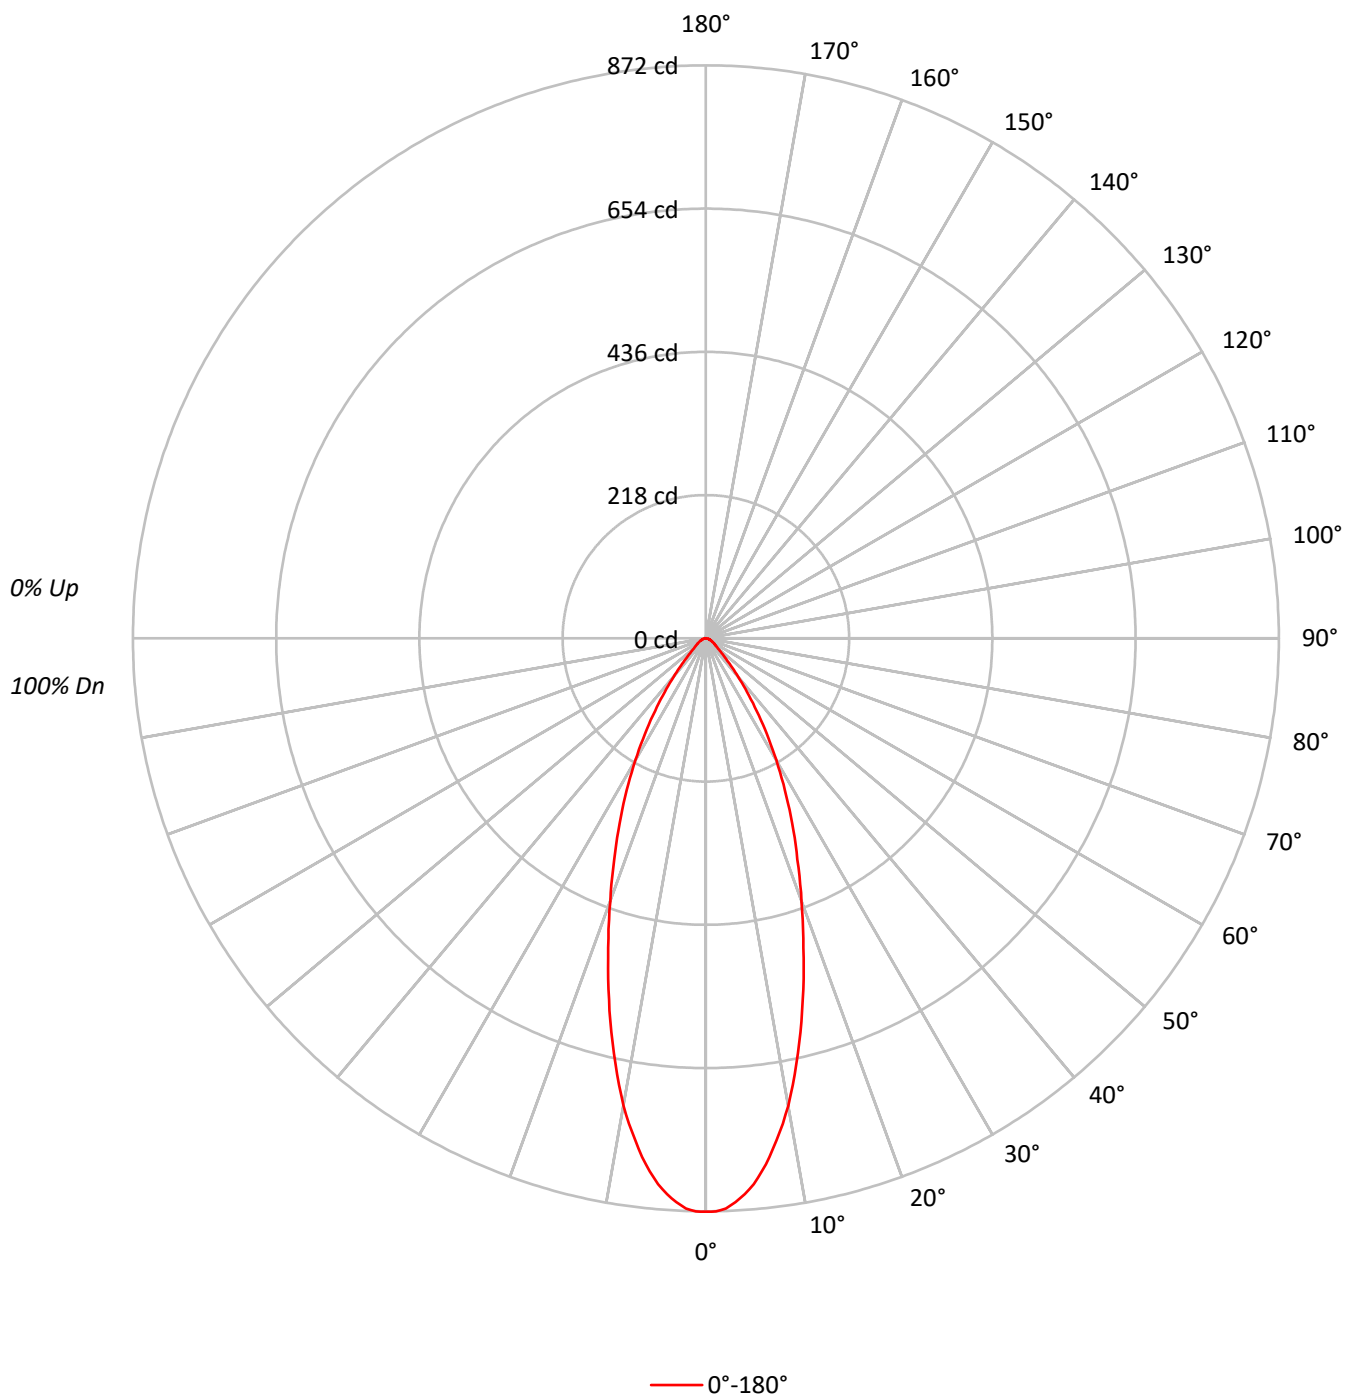

TEST NUMBER: P1284691

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLP1MW_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97	96	95	93
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92	90	88	86
3	102	95	90	86	100	94	89	86	91	87	84		89	86	83		87	84	82	80
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82	79	76	75
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78	74	71	70
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74	70	67	66
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70	66	63	62
8	80	70	65	60	79	70	64	60	69	64	60		68	63	60		67	63	60	58
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64	59	56	55
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61	57	54	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	191322
5°	183557
10°	160808
15°	129263
20°	99315
25°	75150
30°	54287
35°	36058
40°	21870
45°	12746
50°	8119
55°	6614
60°	5745
65°	5137
70°	4231
75°	4151
80°	3157
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12746 cd/sqm

TEST NUMBER: P1284691

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLP1MW_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.9	14.4
10°-20°	157.4	29.9
20°-30°	142.4	27.0
30°-40°	85.5	16.2
40°-50°	34.0	6.4
50°-60°	15.7	3.0
60°-70°	9.6	1.8
70°-80°	5.1	1.0
80°-90°	1.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	375.7	71.3
0°-40°	461.3	87.5
0°-60°	510.9	96.9
0°-90°	527.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	527.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	872	
5°	834	76
15°	569	157
25°	311	142
35°	135	86
45°	41	34
55°	17	16
65°	10	10
75°	5	5
85°	2	1
90°	0	

TEST NUMBER: P1284691

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLP1MW_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	872.5
1°	872.5
2°	868.4
3°	859.4
4°	847.9
5°	833.9
6°	815.8
7°	795.3
8°	771.5
9°	747.7
10°	722.2
11°	692.6
12°	662.2
13°	631.8
14°	601.4
15°	569.4
17.5°	493.8
20°	425.6
22.5°	364.0
25°	310.6
27.5°	260.4
30°	214.4
32.5°	172.5
35°	134.7
37.5°	102.7
40°	76.4
42.5°	55.9
45°	41.1
47.5°	31.2
50°	23.8
52.5°	19.7
55°	17.3
57.5°	14.8
60°	13.1
62.5°	10.7
65°	9.9
67.5°	8.2
70°	6.6
72.5°	5.8
75°	4.9
77.5°	4.1
80°	2.5
82.5°	1.6
85°	1.6
87.5°	0.8



TEST NUMBER: P1284691

CATALOG NUMBER: P3AS13R25B2750DE010 E3DLP1MW_5000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)