

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284773

Luminaire Tested: P3AS13R30B2750DE010 E3DL1GPH\_3000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1284773  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R30B2750DE010 E3DL1GPH\_3000K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 393.0 lumens  
Efficiency: N/A  
Efficacy: 20.6 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1284773

CATALOG NUMBER: P3AS13R30B2750DE010 E3DL1GPH\_3000K

### Luminous Intensity Polar Plot

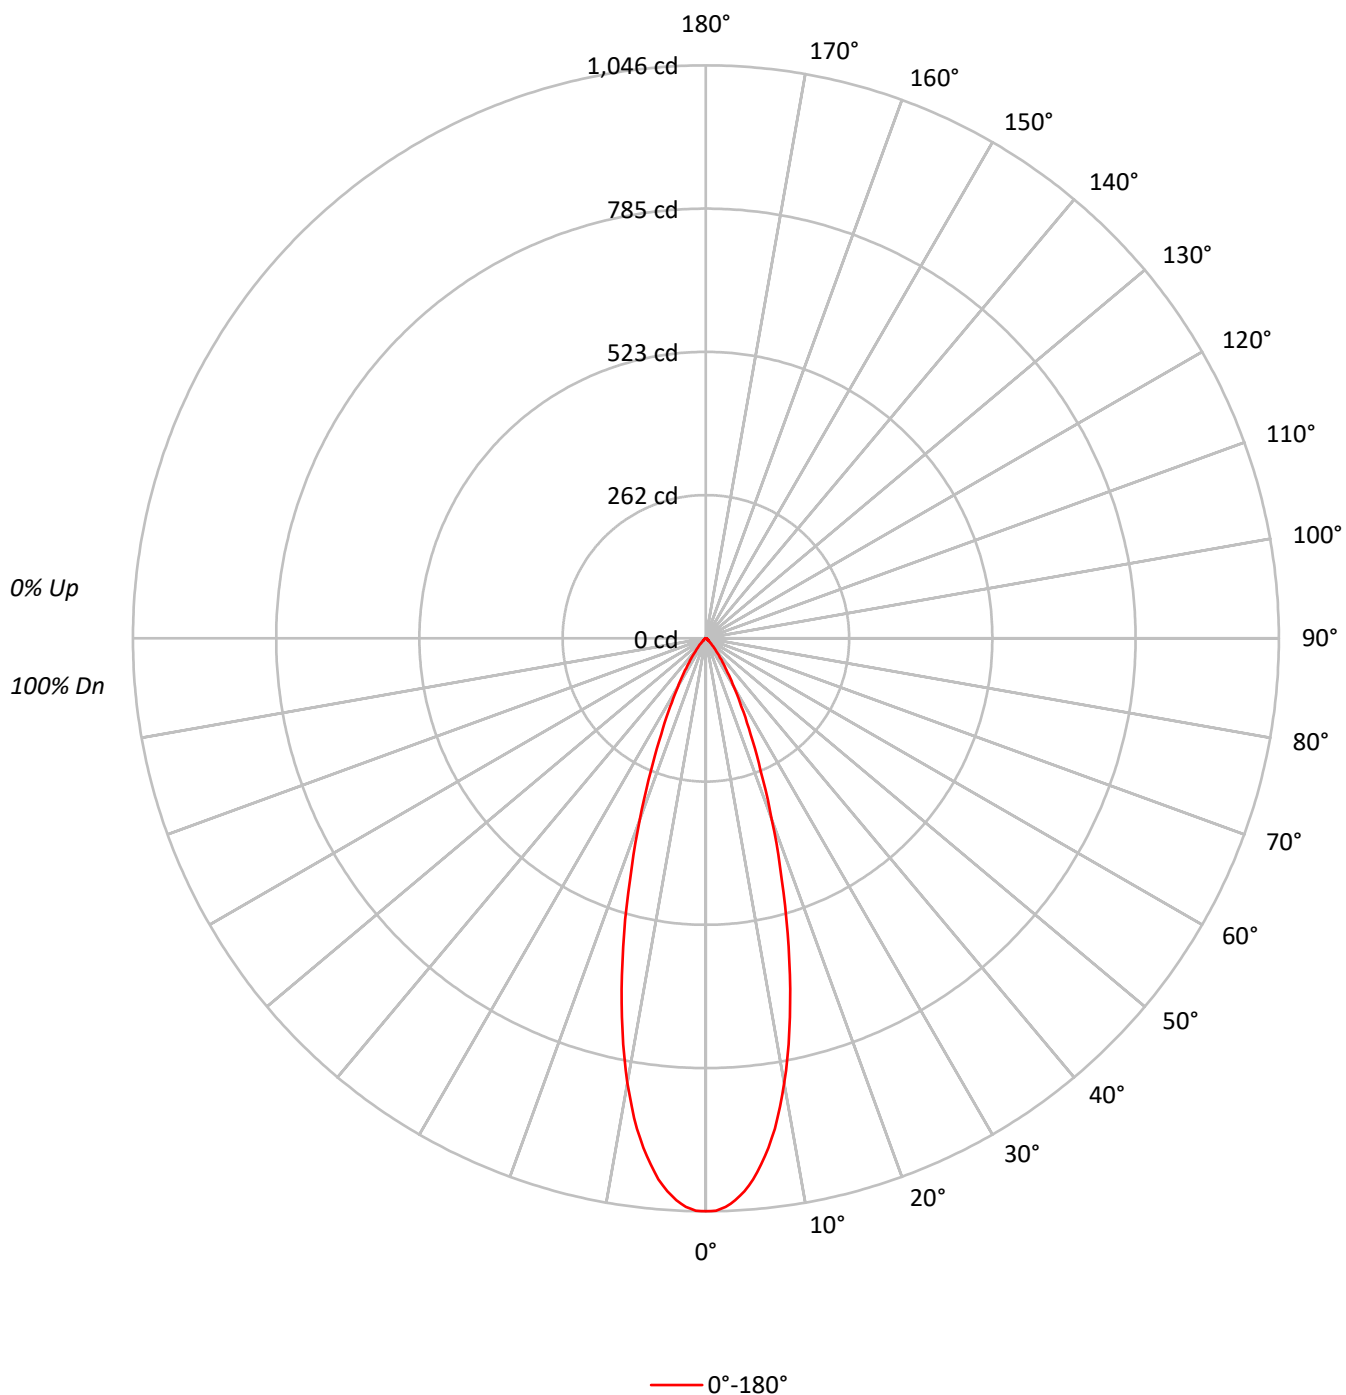

TEST NUMBER: P1284773

CATALOG NUMBER: P3AS13R30B2750DE010 E3DL1GPH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     |     | 0   |     |     |     | 0   |     |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 97  | 98  | 99  | 100 | 101 | 102 | 103 | 104 | 105 | 106 | 107 | 108 |
| 2   | 110 | 105 | 102 | 99  | 107 | 104 | 101 | 98  | 101 | 98  | 96  | 98  | 96  | 94  | 95  | 93  | 92  | 92  | 93  | 95  | 97  | 99  | 101 | 103 | 105 | 107 | 109 | 111 | 113 |
| 3   | 105 | 100 | 96  | 92  | 103 | 98  | 95  | 91  | 96  | 93  | 90  | 94  | 91  | 89  | 91  | 89  | 87  | 87  | 89  | 91  | 93  | 95  | 97  | 99  | 101 | 103 | 105 | 107 | 109 |
| 4   | 101 | 95  | 90  | 87  | 99  | 94  | 89  | 86  | 92  | 88  | 85  | 90  | 87  | 84  | 88  | 85  | 83  | 83  | 85  | 88  | 90  | 92  | 94  | 96  | 98  | 100 | 102 | 104 | 106 |
| 5   | 97  | 90  | 85  | 82  | 96  | 89  | 85  | 81  | 88  | 84  | 81  | 86  | 83  | 80  | 85  | 82  | 79  | 79  | 81  | 84  | 86  | 88  | 90  | 92  | 94  | 96  | 98  | 100 | 102 |
| 6   | 94  | 86  | 81  | 78  | 92  | 85  | 81  | 77  | 84  | 80  | 77  | 83  | 79  | 76  | 81  | 78  | 76  | 76  | 78  | 81  | 83  | 85  | 87  | 89  | 91  | 93  | 95  | 97  | 99  |
| 7   | 90  | 82  | 77  | 74  | 89  | 82  | 77  | 74  | 81  | 76  | 73  | 80  | 76  | 73  | 79  | 75  | 73  | 73  | 75  | 78  | 80  | 82  | 84  | 86  | 88  | 90  | 92  | 94  | 96  |
| 8   | 87  | 79  | 74  | 71  | 86  | 79  | 74  | 71  | 78  | 73  | 70  | 77  | 73  | 70  | 76  | 72  | 70  | 70  | 72  | 75  | 77  | 79  | 81  | 83  | 85  | 87  | 89  | 91  | 93  |
| 9   | 84  | 76  | 71  | 68  | 83  | 75  | 71  | 68  | 75  | 70  | 67  | 74  | 70  | 67  | 73  | 70  | 67  | 67  | 69  | 72  | 74  | 76  | 78  | 80  | 82  | 84  | 86  | 88  | 90  |
| 10  | 81  | 73  | 68  | 65  | 80  | 73  | 68  | 65  | 72  | 68  | 65  | 71  | 67  | 65  | 71  | 67  | 65  | 65  | 67  | 70  | 72  | 74  | 76  | 78  | 80  | 82  | 84  | 86  | 88  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 229324 |
| 5°  | 218269 |
| 10° | 183608 |
| 15° | 132396 |
| 20° | 82117  |
| 25° | 46720  |
| 30° | 25953  |
| 35° | 14107  |
| 40° | 7443   |
| 45° | 4031   |
| 50° | 2149   |
| 55° | 1415   |
| 60° | 1316   |
| 65° | 1349   |
| 70° | 1218   |
| 75° | 932    |
| 80° | 884    |
| 85° | 1006   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 4031 cd/sqm

TEST NUMBER: P1284773

CATALOG NUMBER: P3AS13R30B2750DE010 E3DL1GPH\_3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 89.3   | 22.7      |
| 10°-20°   | 158.7  | 40.4      |
| 20°-30°   | 91.7   | 23.3      |
| 30°-40°   | 34.8   | 8.9       |
| 40°-50°   | 10.7   | 2.7       |
| 50°-60°   | 3.6    | 0.9       |
| 60°-70°   | 2.4    | 0.6       |
| 70°-80°   | 1.3    | 0.3       |
| 80°-90°   | 0.4    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 339.7  | 86.4      |
| 0°-40°    | 374.6  | 95.3      |
| 0°-60°    | 388.9  | 98.9      |
| 0°-90°    | 393.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 393.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1046 |      |
| 5°  | 992  | 89   |
| 15° | 583  | 159  |
| 25° | 193  | 92   |
| 35° | 53   | 35   |
| 45° | 13   | 11   |
| 55° | 4    | 4    |
| 65° | 3    | 2    |
| 75° | 1    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1284773

CATALOG NUMBER: P3AS13R30B2750DE010 E3DL1GPH\_3000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1045.8 |
| 1°    | 1045.1 |
| 2°    | 1038.8 |
| 3°    | 1026.9 |
| 4°    | 1012.0 |
| 5°    | 991.6  |
| 6°    | 965.6  |
| 7°    | 936.7  |
| 8°    | 904.4  |
| 9°    | 865.8  |
| 10°   | 824.6  |
| 11°   | 780.0  |
| 12°   | 732.9  |
| 13°   | 683.5  |
| 14°   | 633.4  |
| 15°   | 583.2  |
| 17.5° | 460.0  |
| 20°   | 351.9  |
| 22.5° | 261.0  |
| 25°   | 193.1  |
| 27.5° | 140.3  |
| 30°   | 102.5  |
| 32.5° | 73.9   |
| 35°   | 52.7   |
| 37.5° | 36.8   |
| 40°   | 26.0   |
| 42.5° | 18.2   |
| 45°   | 13.0   |
| 47.5° | 8.9    |
| 50°   | 6.3    |
| 52.5° | 4.5    |
| 55°   | 3.7    |
| 57.5° | 3.3    |
| 60°   | 3.0    |
| 62.5° | 2.6    |
| 65°   | 2.6    |
| 67.5° | 2.2    |
| 70°   | 1.9    |
| 72.5° | 1.5    |
| 75°   | 1.1    |
| 77.5° | 1.1    |
| 80°   | 0.7    |
| 82.5° | 0.7    |
| 85°   | 0.4    |
| 87.5° | 0.0    |



TEST NUMBER: P1284773

CATALOG NUMBER: P3AS13R30B2750DE010 E3DL1GPH\_3000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)