

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284832

Luminaire Tested: P3AS13R30B2750DE010 E3DLP1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1284832
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R30B2750DE010 E3DLP1GPH_2700K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 243.0 lumens
Efficiency: N/A
Efficacy: 12.7 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1284832

CATALOG NUMBER: P3AS13R30B2750DE010 E3DLP1GPH_2700K

Luminous Intensity Polar Plot

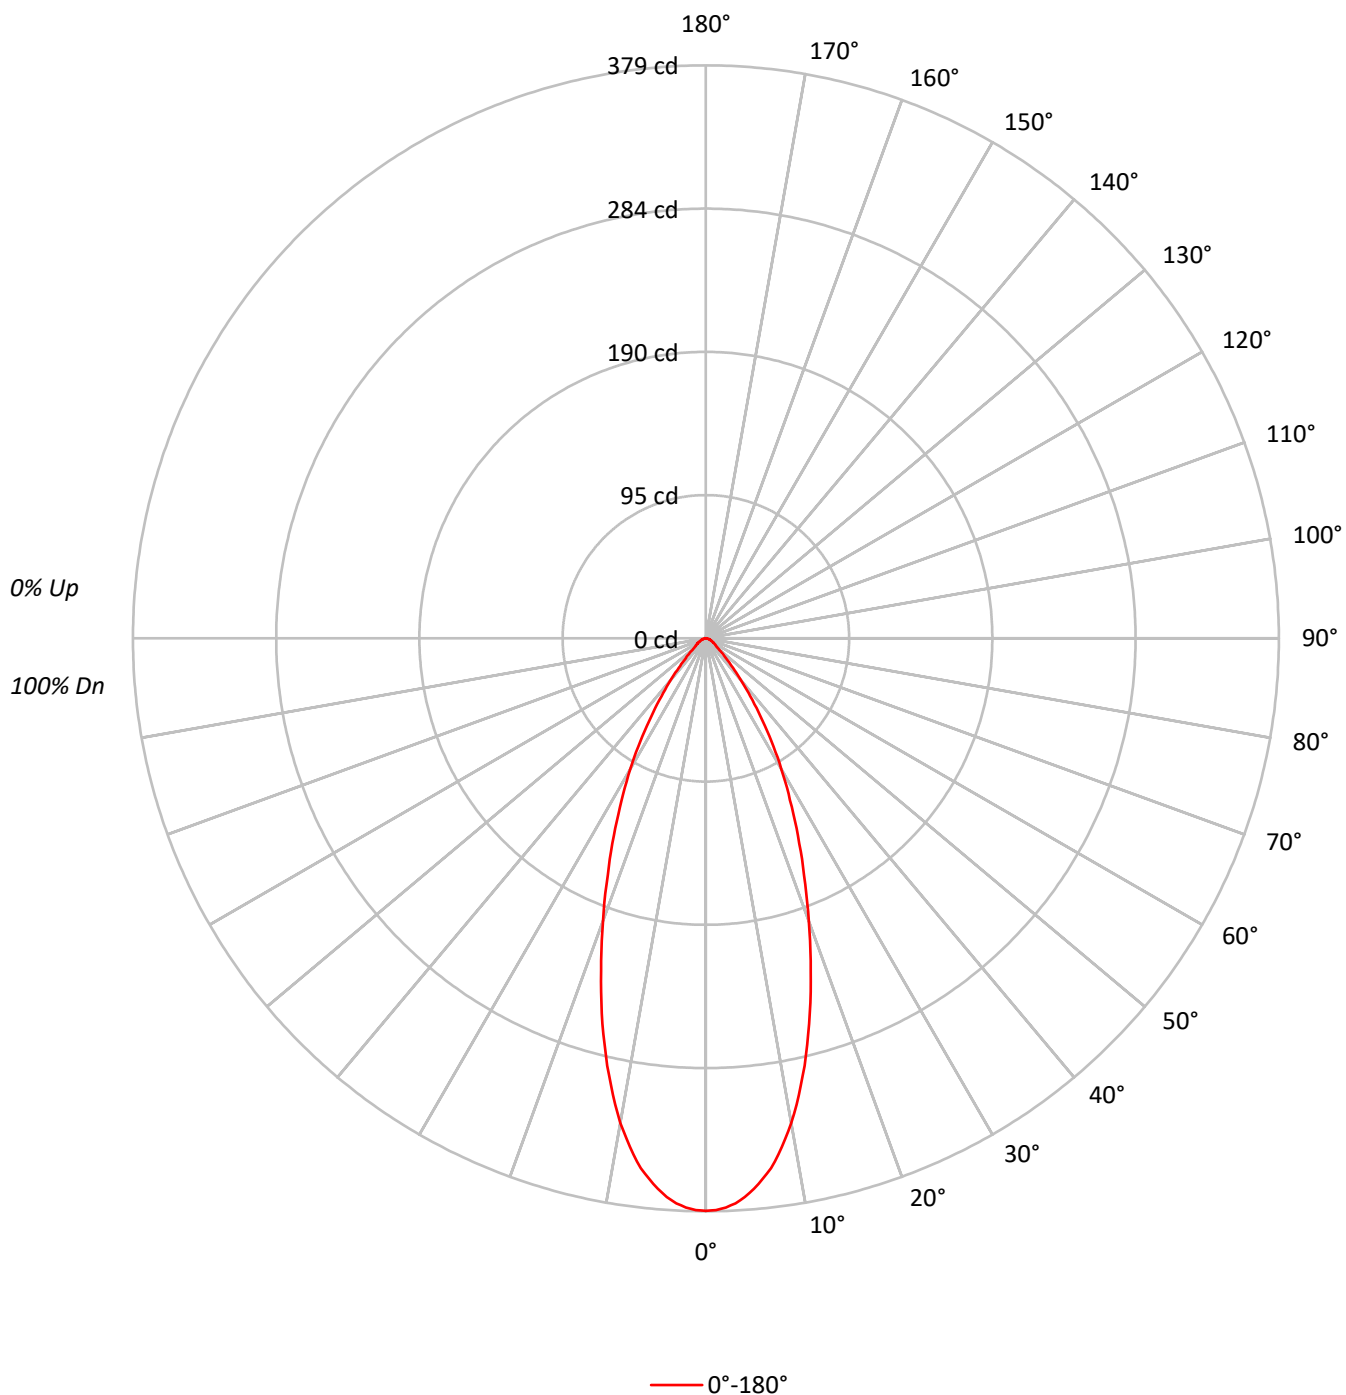



TEST NUMBER: P1284832

CATALOG NUMBER: P3AS13R30B2750DE010 E3DLP1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97	96	95	93
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92	90	88	86
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87	84	82	80
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82	79	76	74
5	92	84	78	73	90	83	77	73	81	76	72		79	75	72		78	74	71	70
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74	70	67	65
7	83	74	68	64	82	74	68	64	72	67	63		71	67	63		70	66	63	61
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67	62	59	58
9	76	67	61	57	75	66	60	57	65	60	56		64	60	56		63	59	56	55
10	73	63	58	54	72	63	57	54	62	57	53		61	57	53		60	56	53	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	83042
5°	80453
10°	72499
15°	59955
20°	46414
25°	34817
30°	25295
35°	16838
40°	10362
45°	6078
50°	3718
55°	3020
60°	2631
65°	2127
70°	1923
75°	1949
80°	1389
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6078 cd/sqm

TEST NUMBER: P1284832

CATALOG NUMBER: P3AS13R30B2750DE010 E3DLP1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.6	13.8
10°-20°	72.7	29.9
20°-30°	66.2	27.2
30°-40°	40.0	16.5
40°-50°	16.1	6.6
50°-60°	7.1	2.9
60°-70°	4.3	1.8
70°-80°	2.3	1.0
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	172.5	71.0
0°-40°	212.6	87.5
0°-60°	235.7	97.0
0°-90°	243.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	243.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	379	
5°	366	34
15°	264	73
25°	144	66
35°	63	40
45°	20	16
55°	8	7
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1284832

CATALOG NUMBER: P3AS13R30B2750DE010 E3DLP1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	378.7
1°	378.3
2°	376.8
3°	374.2
4°	370.4
5°	365.5
6°	359.5
7°	353.1
8°	344.8
9°	335.4
10°	325.6
11°	314.2
12°	302.2
13°	290.1
14°	276.9
15°	264.1
17.5°	230.6
20°	198.9
22.5°	169.6
25°	143.9
27.5°	120.6
30°	99.9
32.5°	80.6
35°	62.9
37.5°	48.2
40°	36.2
42.5°	26.4
45°	19.6
47.5°	14.7
50°	10.9
52.5°	8.7
55°	7.9
57.5°	6.8
60°	6.0
62.5°	4.9
65°	4.1
67.5°	3.8
70°	3.0
72.5°	2.6
75°	2.3
77.5°	1.9
80°	1.1
82.5°	0.8
85°	0.8
87.5°	0.4



TEST NUMBER: P1284832

CATALOG NUMBER: P3AS13R30B2750DE010 E3DLP1GPH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)