

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1284864

Luminaire Tested: P3AS13R30B2750DE010 E3PH1MW\_3500K

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1284864  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R30B2750DE010 E3PH1MW\_3500K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 80CRI , E3PH1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 799.0 lumens  
Efficiency: N/A  
Efficacy: 41.8 lumens/watt  
Spacing Criteria (0/90/45): 0.33 / 0.33 / 0.34  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1284864

CATALOG NUMBER: P3AS13R30B2750DE010 E3PH1MW\_3500K

### Luminous Intensity Polar Plot

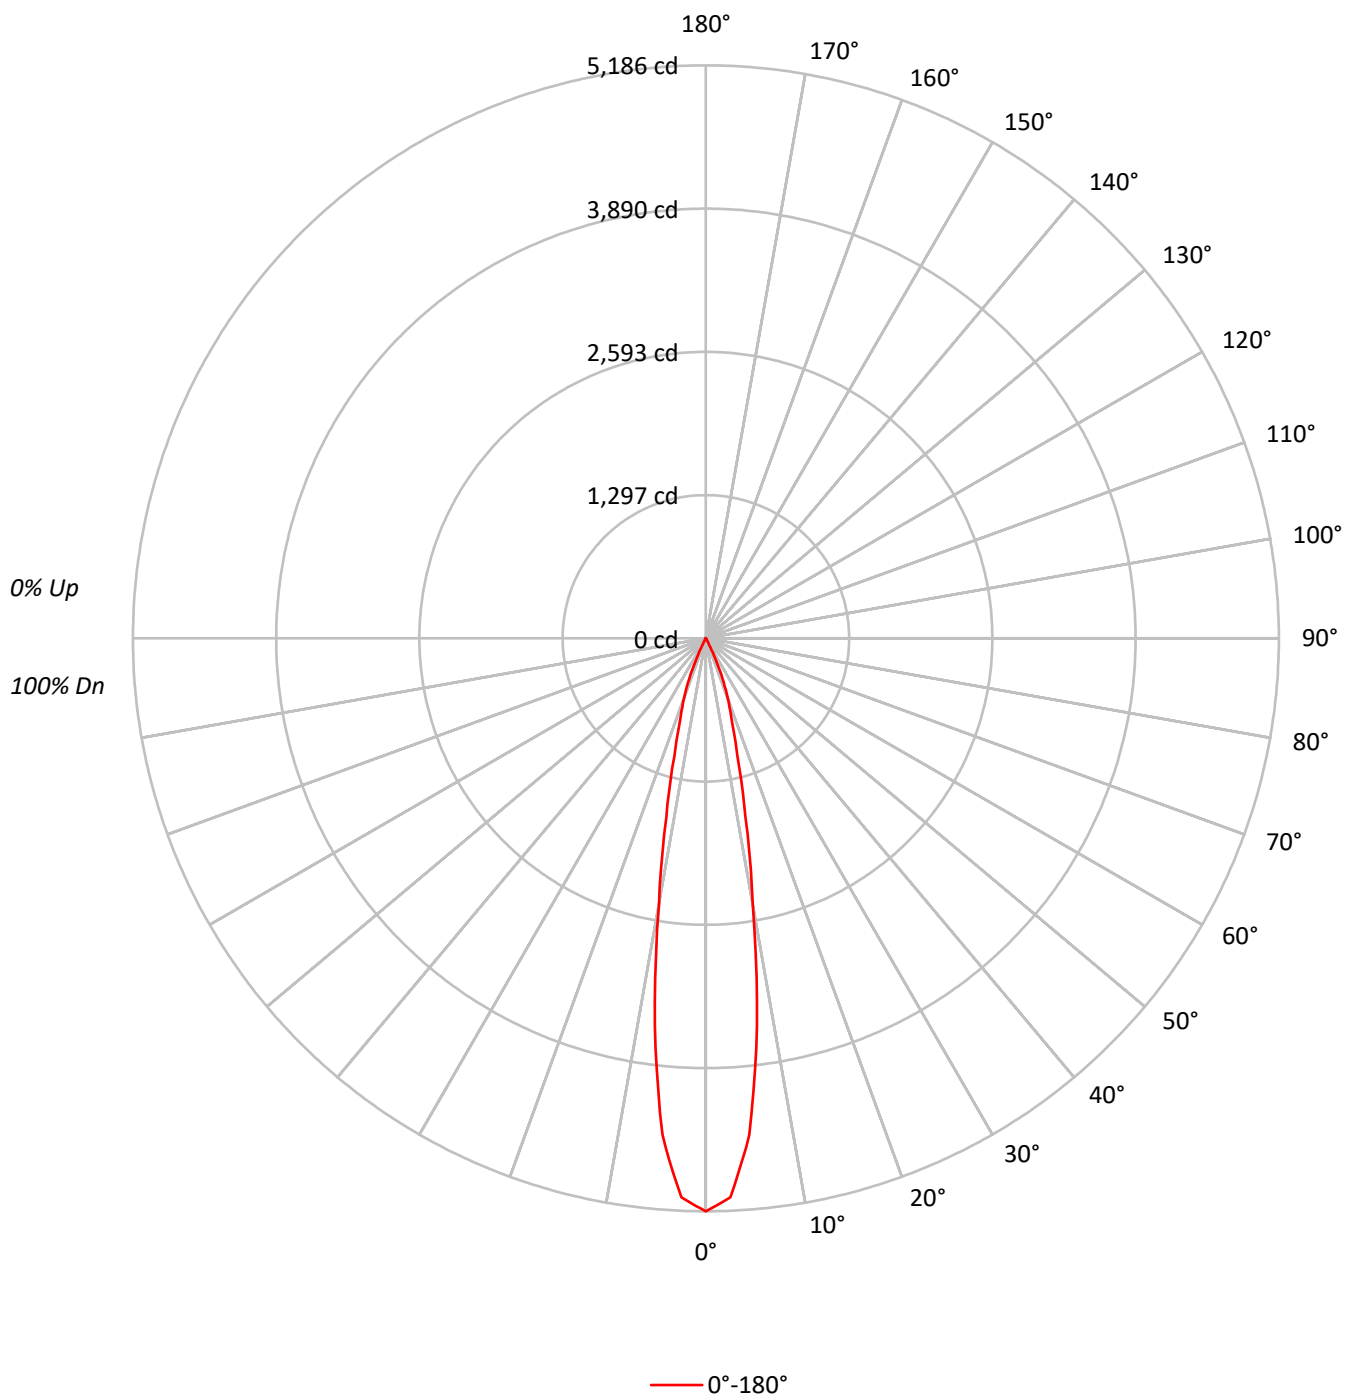

TEST NUMBER: P1284864

CATALOG NUMBER: P3AS13R30B2750DE010 E3PH1MW\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 |
| 1   | 115 | 113 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99  | 97  | 97  | 97  |
| 2   | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 103 | 104 | 102 | 100 | 101 | 100 | 98  | 99  | 97  | 96  | 95  | 95  | 95  |
| 3   | 109 | 105 | 102 | 99  | 107 | 104 | 101 | 98  | 101 | 99  | 97  | 99  | 97  | 95  | 97  | 95  | 94  | 93  | 93  | 93  |
| 4   | 106 | 101 | 98  | 95  | 105 | 100 | 97  | 95  | 98  | 96  | 94  | 97  | 94  | 92  | 95  | 93  | 91  | 90  | 90  | 90  |
| 5   | 104 | 98  | 95  | 92  | 102 | 97  | 94  | 91  | 96  | 93  | 91  | 94  | 92  | 90  | 93  | 91  | 89  | 88  | 88  | 88  |
| 6   | 101 | 95  | 92  | 89  | 100 | 95  | 91  | 89  | 94  | 91  | 88  | 92  | 90  | 88  | 91  | 89  | 87  | 86  | 86  | 86  |
| 7   | 99  | 93  | 89  | 87  | 98  | 92  | 89  | 86  | 91  | 88  | 86  | 90  | 88  | 86  | 89  | 87  | 85  | 84  | 84  | 84  |
| 8   | 96  | 91  | 87  | 84  | 96  | 90  | 87  | 84  | 89  | 86  | 84  | 88  | 86  | 84  | 88  | 85  | 83  | 83  | 83  | 83  |
| 9   | 94  | 89  | 85  | 82  | 94  | 88  | 85  | 82  | 87  | 84  | 82  | 87  | 84  | 82  | 86  | 84  | 82  | 81  | 81  | 81  |
| 10  | 92  | 87  | 83  | 81  | 92  | 86  | 83  | 81  | 86  | 82  | 80  | 85  | 82  | 80  | 84  | 82  | 80  | 79  | 79  | 79  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1137277 |
| 5°  | 993416  |
| 10° | 544991  |
| 15° | 250739  |
| 20° | 135135  |
| 25° | 45801   |
| 30° | 5950    |
| 35° | 910     |
| 40° | 315     |
| 45° | 0       |
| 50° | 0       |
| 55° | 0       |
| 60° | 0       |
| 65° | 0       |
| 70° | 0       |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 0 cd/sqm

TEST NUMBER: P1284864

CATALOG NUMBER: P3AS13R30B2750DE010 E3PH1MW\_3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 361.6  | 45.3      |
| 10°-20°   | 331.4  | 41.5      |
| 20°-30°   | 101.9  | 12.8      |
| 30°-40°   | 3.8    | 0.5       |
| 40°-50°   | 0.3    | 0.0       |
| 50°-60°   | 0.0    | 0.0       |
| 60°-70°   | 0.0    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 794.9  | 99.5      |
| 0°-40°    | 798.7  | 100.0     |
| 0°-60°    | 799.0  | 100.0     |
| 0°-90°    | 799.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 799.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 5186 |      |
| 5°  | 4513 | 362  |
| 15° | 1104 | 331  |
| 25° | 189  | 102  |
| 35° | 3    | 4    |
| 45° | 0    | 0    |
| 55° | 0    | 0    |
| 65° | 0    | 0    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1284864

CATALOG NUMBER: P3AS13R30B2750DE010 E3PH1MW\_3500K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 5186.4 |
| 2.5°  | 5065.4 |
| 5°    | 4513.1 |
| 7.5°  | 3540.8 |
| 10°   | 2447.6 |
| 12.5° | 1656.7 |
| 15°   | 1104.5 |
| 17.5° | 774.0  |
| 20°   | 579.1  |
| 22.5° | 389.8  |
| 25°   | 189.3  |
| 27.5° | 69.5   |
| 30°   | 23.5   |
| 32.5° | 7.8    |
| 35°   | 3.4    |
| 37.5° | 2.2    |
| 40°   | 1.1    |
| 42.5° | 1.1    |
| 45°   | 0.0    |
| 47.5° | 0.0    |
| 50°   | 0.0    |
| 52.5° | 0.0    |
| 55°   | 0.0    |
| 57.5° | 0.0    |
| 60°   | 0.0    |
| 62.5° | 0.0    |
| 65°   | 0.0    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)