

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285001

Luminaire Tested: P3AS13R35B2750DE010 E3DLP1WMH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285001
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R35B2750DE010 E3DLP1WMH_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R35 optic, 5000K CCT AND, 80CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 533.0 lumens
Efficiency: N/A
Efficacy: 27.9 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285001

CATALOG NUMBER: P3AS13R35B2750DE010 E3DLP1WMH_5000K

Luminous Intensity Polar Plot

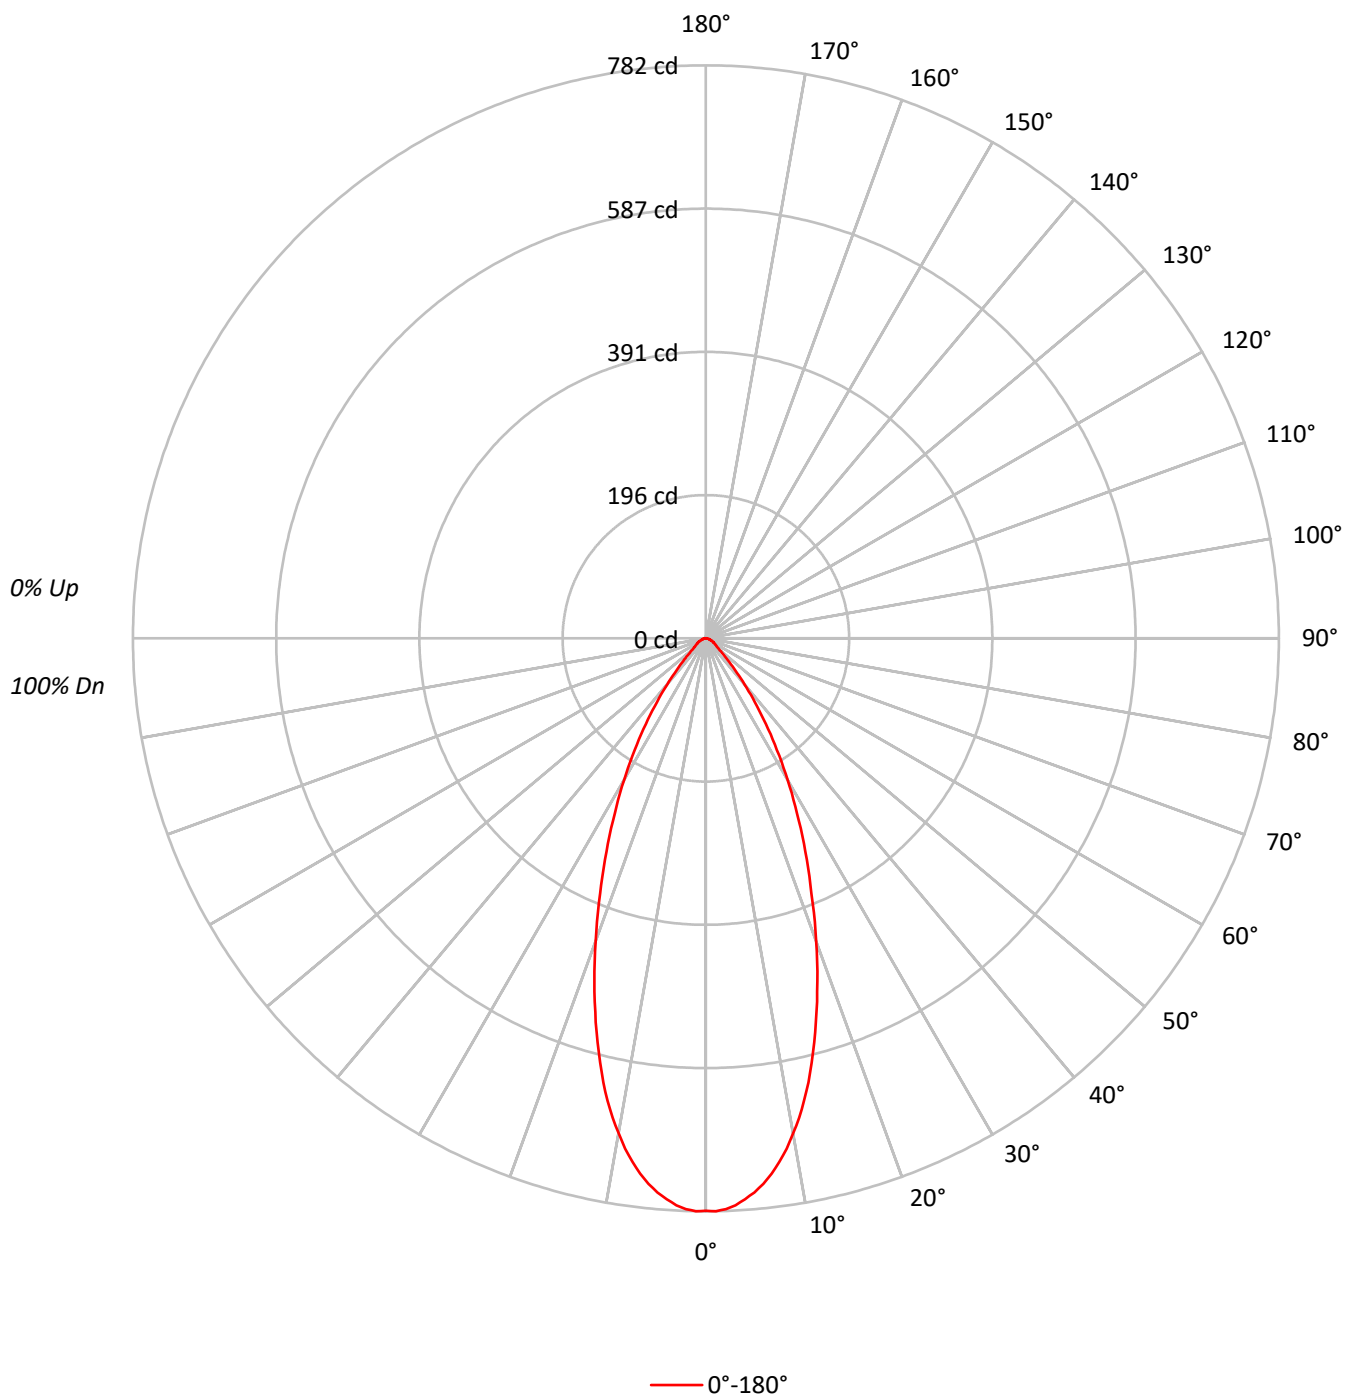

TEST NUMBER: P1285001

CATALOG NUMBER: P3AS13R35B2750DE010 E3DLP1WMH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	171324
5°	167092
10°	152769
15°	129672
20°	102652
25°	77642
30°	56515
35°	38226
40°	23501
45°	13490
50°	8119
55°	6576
60°	5745
65°	5085
70°	4231
75°	4151
80°	4167
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13490 cd/sqm

TEST NUMBER: P1285001

CATALOG NUMBER: P3AS13R35B2750DE010 E3DLP1WMH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.2	13.2
10°-20°	157.5	29.5
20°-30°	147.3	27.6
30°-40°	90.2	16.9
40°-50°	35.5	6.7
50°-60°	15.6	2.9
60°-70°	9.7	1.8
70°-80°	5.2	1.0
80°-90°	1.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	374.9	70.3
0°-40°	465.1	87.3
0°-60°	516.3	96.9
0°-90°	533.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	533.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	781	
5°	759	70
15°	571	157
25°	321	147
35°	143	90
45°	44	36
55°	17	16
65°	10	10
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1285001

CATALOG NUMBER: P3AS13R35B2750DE010 E3DLP1WMH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	781.3
1°	782.1
2°	779.6
3°	774.7
4°	767.3
5°	759.1
6°	748.5
7°	736.1
8°	721.4
9°	705.0
10°	686.1
11°	666.4
12°	645.1
13°	622.1
14°	596.6
15°	571.2
17.5°	505.5
20°	439.9
22.5°	376.7
25°	320.9
27.5°	269.2
30°	223.2
32.5°	180.5
35°	142.8
37.5°	109.2
40°	82.1
42.5°	59.1
45°	43.5
47.5°	31.2
50°	23.8
52.5°	19.7
55°	17.2
57.5°	14.8
60°	13.1
62.5°	11.5
65°	9.8
67.5°	8.2
70°	6.6
72.5°	5.7
75°	4.9
77.5°	4.1
80°	3.3
82.5°	2.5
85°	1.6
87.5°	0.8



TEST NUMBER: P1285001

CATALOG NUMBER: P3AS13R35B2750DE010 E3DLP1WMH_5000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)