

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285005

Luminaire Tested: P3AS13R35B2750DE010 E3PH1MW_4000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285005
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R35B2750DE010 E3PH1MW_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R35 optic, 4000K CCT AND, 80CRI , E3PH1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 893.0 lumens
Efficiency: N/A
Efficacy: 46.8 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285005

CATALOG NUMBER: P3AS13R35B2750DE010 E3PH1MW_4000K

Luminous Intensity Polar Plot

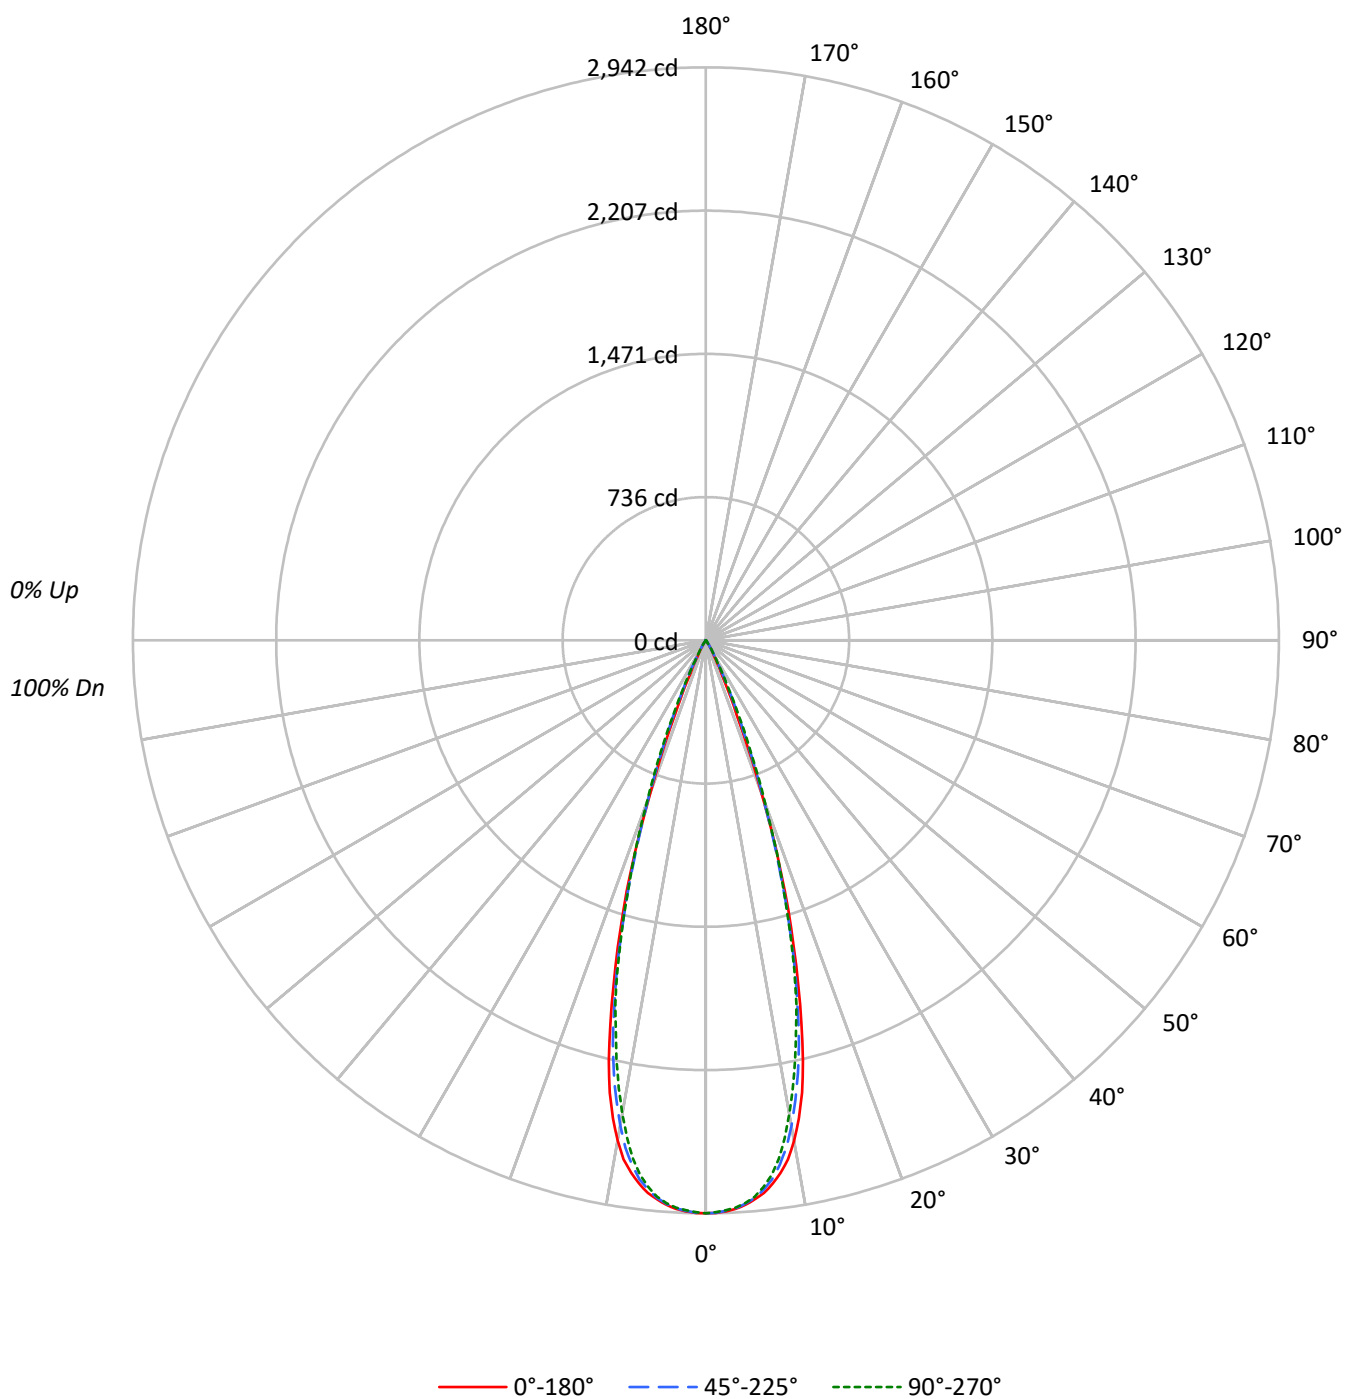

TEST NUMBER: P1285005

CATALOG NUMBER: P3AS13R35B2750DE010 E3PH1MW_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93	92	91
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	90	89	87
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	87	85	83
5	101	95	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	85	82	80
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82	79	77
7	96	89	85	82	94	89	85	82	87	84	81	86	83	81	85	83	81	78	76	74
8	93	86	82	79	92	86	82	79	85	81	79	84	81	79	83	80	78	75	73	71
9	90	84	80	77	89	83	79	77	82	79	76	82	79	76	81	78	76	73	71	69
10	88	81	77	75	87	81	77	74	80	77	74	80	76	74	79	76	74	71	69	67

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	645146	645146	645146
5°	634073	632708	631365
10°	581107	563650	549934
15°	416120	402840	397959
20°	192960	199587	206588
25°	45777	65133	67939
30°	13445	15395	17344
35°	3078	4952	4524
40°	658	1317	887
45°	248	248	248
50°	273	0	273
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 288 cd/sqm

TEST NUMBER: P1285005

CATALOG NUMBER: P3AS13R35B2750DE010 E3PH1MW_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	264.1	29.6
10°-20°	472.2	52.9
20°-30°	142.1	15.9
30°-40°	13.6	1.5
40°-50°	0.9	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	878.4	98.4
0°-40°	892.0	99.9
0°-60°	893.0	100.0
0°-90°	893.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	893.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2942	2942	2942	2942	2942	
5°	2881	2880	2874	2871	2868	267
15°	1833	1819	1774	1767	1753	484
25°	189	208	269	281	281	122
35°	12	15	18	20	17	11
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1285005

CATALOG NUMBER: P3AS13R35B2750DE010 E3PH1MW_4000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2942.1	2942.1	2942.1	2942.1	2942.1
1°	2940.6	2940.6	2939.0	2939.0	2936.0
2°	2933.7	2934.4	2931.4	2930.6	2928.3
3°	2922.9	2920.6	2920.6	2919.1	2917.5
4°	2906.0	2901.4	2899.8	2900.6	2897.5
5°	2880.6	2879.8	2874.4	2870.6	2868.3
6°	2852.9	2847.5	2836.0	2826.0	2823.7
7°	2811.4	2799.8	2789.8	2769.1	2766.0
8°	2760.6	2742.1	2720.6	2691.4	2689.8
9°	2698.3	2668.3	2638.3	2599.1	2585.2
10°	2609.8	2582.1	2531.4	2496.8	2469.8
11°	2499.8	2465.2	2406.0	2364.5	2342.2
12°	2375.2	2342.9	2273.7	2236.0	2204.5
13°	2215.2	2188.3	2123.7	2082.2	2057.6
14°	2029.9	2009.9	1948.3	1929.9	1921.4
15°	1833.0	1819.1	1774.5	1766.8	1753.0
17.5°	1349.1	1326.1	1300.7	1305.3	1309.9
20°	826.9	859.2	855.3	872.3	885.3
22.5°	412.3	453.8	502.3	531.5	546.1
25°	189.2	208.4	269.2	280.8	280.8
27.5°	95.4	100.0	126.9	129.2	135.4
30°	53.1	56.9	60.8	67.7	68.5
32.5°	26.9	31.5	33.1	36.9	35.4
35°	11.5	15.4	18.5	20.0	16.9
37.5°	5.4	6.9	10.0	9.2	6.9
40°	2.3	3.1	4.6	3.8	3.1
42.5°	1.5	1.5	2.3	1.5	1.5
45°	0.8	0.8	0.8	0.8	0.8
47.5°	0.8	0.8	0.0	0.8	0.8
50°	0.8	0.0	0.0	0.0	0.8
52.5°	0.8	0.0	0.0	0.0	0.8
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1285005
CATALOG NUMBER: P3AS13R35B2750DE010 E3PH1MW_4000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)