

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285077

Luminaire Tested: P3AS13R40B2750DE010 E3DL1H\_2700K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1285077  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R40B2750DE010 E3DL1H\_2700K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R40 optic, 2700K CCT AND, 90CRI , E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 894.0 lumens  
Efficiency: N/A  
Efficacy: 46.8 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1285077

CATALOG NUMBER: P3AS13R40B2750DE010 E3DL1H\_2700K

### Luminous Intensity Polar Plot

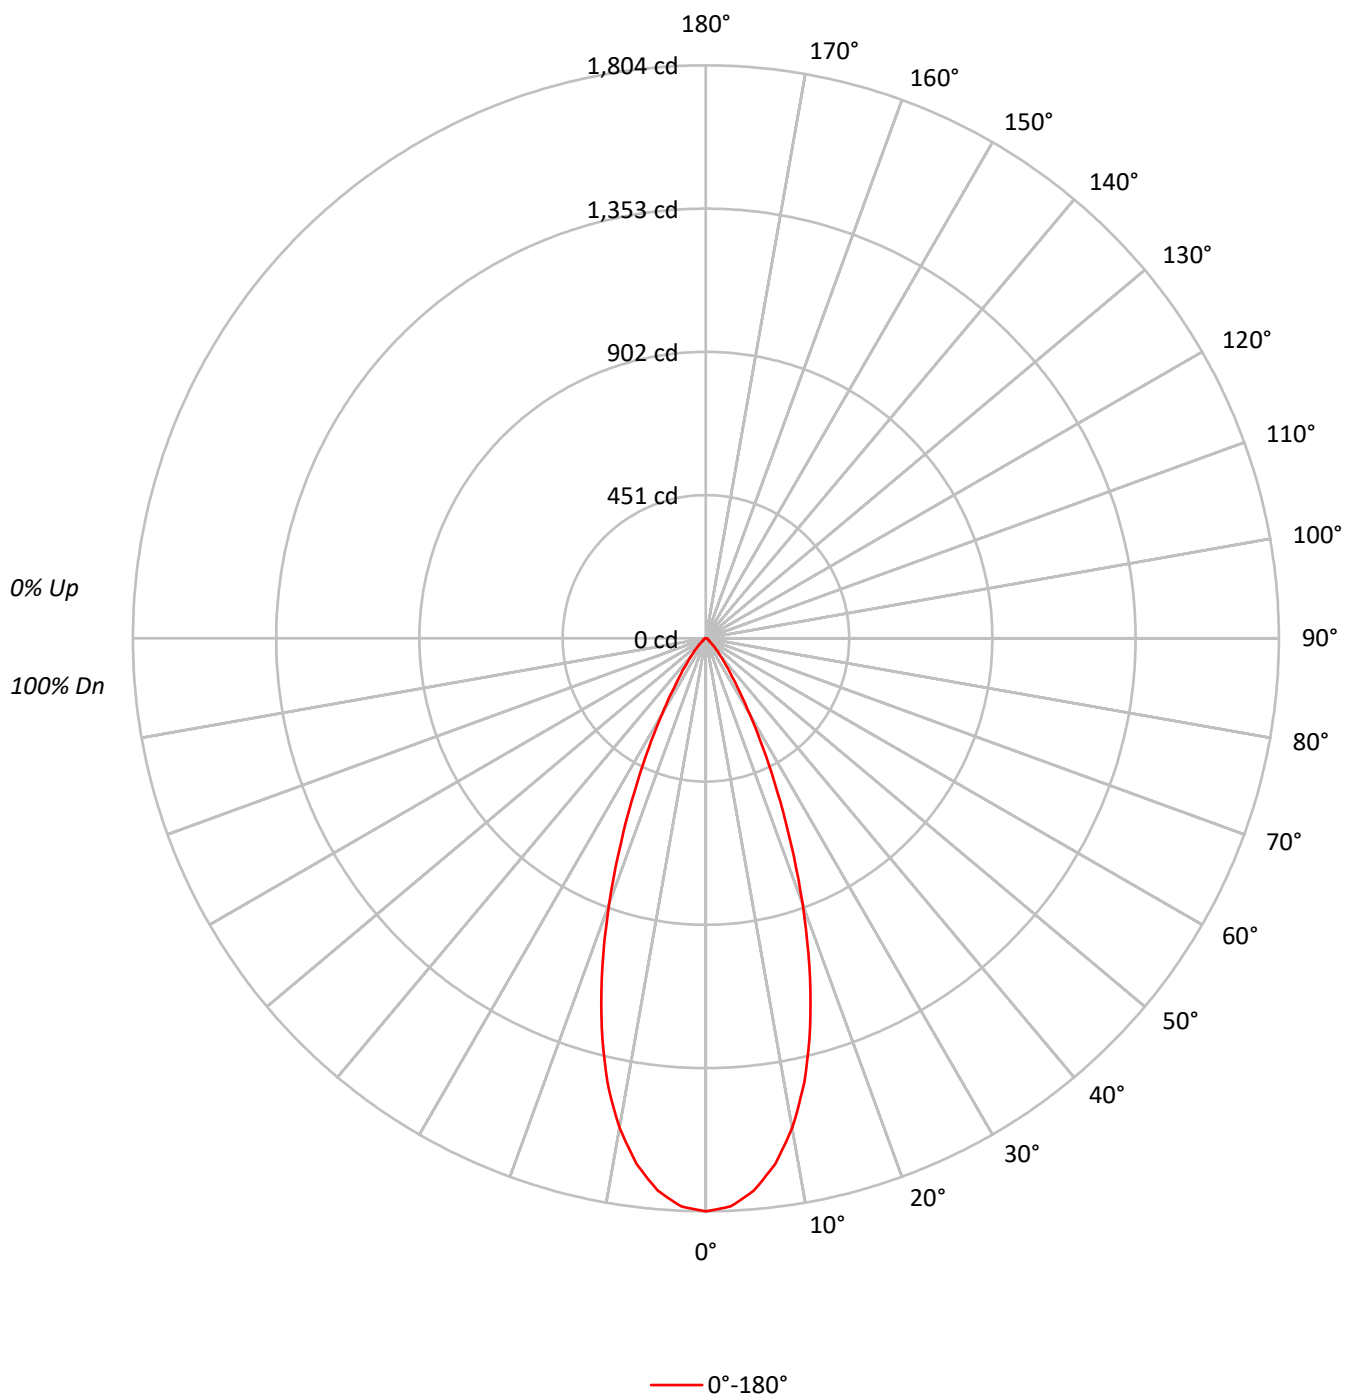

TEST NUMBER: P1285077

CATALOG NUMBER: P3AS13R40B2750DE010 E3DL1H\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 111 | 109 | 107 | 112 | 109 | 107 | 105 | 105 | 104 | 102 |  | 102 | 100 | 99  |  | 98  |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 97  | 95  |  | 97  | 95  | 93  |  | 94  |
| 3   | 104 | 99  | 94  | 91  | 102 | 97  | 93  | 90  | 95  | 91  | 88  |  | 92  | 89  | 87  |  | 90  |
| 4   | 100 | 93  | 88  | 85  | 98  | 92  | 88  | 84  | 90  | 86  | 83  |  | 88  | 85  | 82  |  | 86  |
| 5   | 96  | 88  | 83  | 79  | 94  | 88  | 83  | 79  | 86  | 82  | 78  |  | 84  | 81  | 78  |  | 83  |
| 6   | 92  | 84  | 79  | 75  | 91  | 83  | 78  | 75  | 82  | 78  | 74  |  | 81  | 77  | 74  |  | 79  |
| 7   | 88  | 80  | 75  | 71  | 87  | 79  | 74  | 71  | 78  | 74  | 71  |  | 77  | 73  | 70  |  | 76  |
| 8   | 85  | 76  | 71  | 68  | 84  | 76  | 71  | 67  | 75  | 70  | 67  |  | 74  | 70  | 67  |  | 73  |
| 9   | 82  | 73  | 68  | 64  | 81  | 73  | 68  | 64  | 72  | 67  | 64  |  | 71  | 67  | 64  |  | 70  |
| 10  | 78  | 70  | 65  | 62  | 78  | 70  | 65  | 61  | 69  | 64  | 61  |  | 68  | 64  | 61  |  | 67  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 395582 |
| 5°  | 384084 |
| 10° | 348557 |
| 15° | 287947 |
| 20° | 207708 |
| 25° | 128475 |
| 30° | 69555  |
| 35° | 35951  |
| 40° | 19551  |
| 45° | 10947  |
| 50° | 5492   |
| 55° | 4091   |
| 60° | 3684   |
| 65° | 3580   |
| 70° | 3462   |
| 75° | 3219   |
| 80° | 2904   |
| 85° | 2013   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10947 cd/sqm

TEST NUMBER: P1285077

CATALOG NUMBER: P3AS13R40B2750DE010 E3DL1H\_2700K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 160.8  | 18.0      |
| 10°-20°   | 345.4  | 38.6      |
| 20°-30°   | 246.5  | 27.6      |
| 30°-40°   | 90.7   | 10.2      |
| 40°-50°   | 28.6   | 3.2       |
| 50°-60°   | 9.9    | 1.1       |
| 60°-70°   | 6.8    | 0.8       |
| 70°-80°   | 4.0    | 0.5       |
| 80°-90°   | 1.2    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 752.7  | 84.2      |
| 0°-40°    | 843.5  | 94.3      |
| 0°-60°    | 882.0  | 98.7      |
| 0°-90°    | 894.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 894.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1804 |      |
| 5°  | 1745 | 161  |
| 15° | 1268 | 345  |
| 25° | 531  | 246  |
| 35° | 134  | 91   |
| 45° | 35   | 29   |
| 55° | 11   | 10   |
| 65° | 7    | 7    |
| 75° | 4    | 4    |
| 85° | 1    | 1    |
| 90° | 0    |      |

TEST NUMBER: P1285077

CATALOG NUMBER: P3AS13R40B2750DE010 E3DL1H\_2700K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1804.0 |
| 2.5°  | 1790.2 |
| 5°    | 1744.9 |
| 7.5°  | 1669.7 |
| 10°   | 1565.4 |
| 12.5° | 1432.6 |
| 15°   | 1268.4 |
| 17.5° | 1084.3 |
| 20°   | 890.1  |
| 22.5° | 699.1  |
| 25°   | 531.0  |
| 27.5° | 389.8  |
| 30°   | 274.7  |
| 32.5° | 192.6  |
| 35°   | 134.3  |
| 37.5° | 95.2   |
| 40°   | 68.3   |
| 42.5° | 49.1   |
| 45°   | 35.3   |
| 47.5° | 23.8   |
| 50°   | 16.1   |
| 52.5° | 11.5   |
| 55°   | 10.7   |
| 57.5° | 10.0   |
| 60°   | 8.4    |
| 62.5° | 7.7    |
| 65°   | 6.9    |
| 67.5° | 6.1    |
| 70°   | 5.4    |
| 72.5° | 4.6    |
| 75°   | 3.8    |
| 77.5° | 3.1    |
| 80°   | 2.3    |
| 82.5° | 1.5    |
| 85°   | 0.8    |
| 87.5° | 0.8    |
| 90°   | 0.0    |

(END OF REPORT)