

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285122

Luminaire Tested: P3AS13R40B2750DE010 E3DLD1WH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285122
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R40B2750DE010 E3DLD1WH_2700K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R40 optic, 2700K CCT AND, 90CRI , E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 686.0 lumens
Efficiency: N/A
Efficacy: 35.9 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285122

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WH_2700K

Luminous Intensity Polar Plot

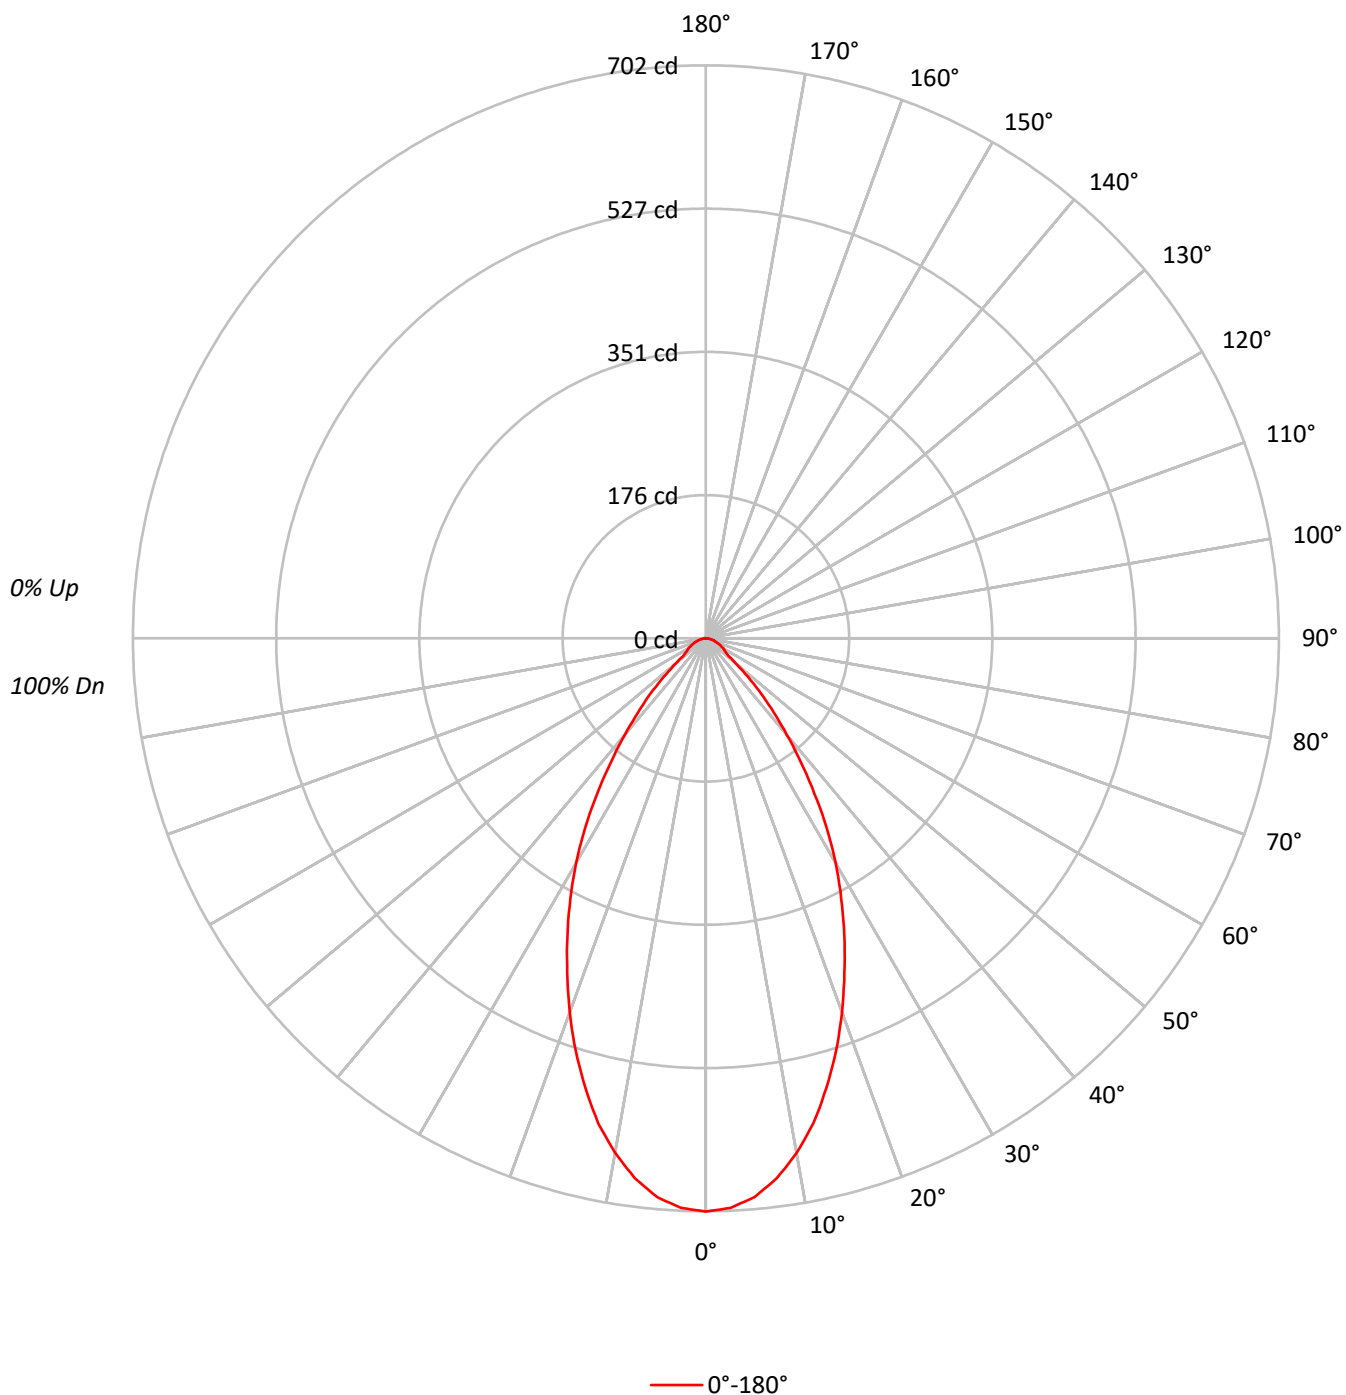

TEST NUMBER: P1285122

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91		
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83		
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76		
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69		
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64		
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59		
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55		
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51		
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48		
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	154001
5°	151199
10°	142527
15°	129467
20°	113737
25°	97119
30°	80443
35°	62051
40°	44168
45°	29740
50°	16238
55°	11431
60°	10789
65°	9962
70°	8848
75°	8472
80°	6819
85°	5787

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 29740 cd/sqm

TEST NUMBER: P1285122

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.1	9.3
10°-20°	158.9	23.2
20°-30°	183.6	26.8
30°-40°	144.7	21.1
40°-50°	74.3	10.8
50°-60°	28.4	4.1
60°-70°	18.8	2.7
70°-80°	10.2	1.5
80°-90°	3.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	406.5	59.3
0°-40°	551.3	80.4
0°-60°	653.9	95.3
0°-90°	686.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	686.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	702	
5°	687	64
15°	570	159
25°	401	184
35°	232	145
45°	96	74
55°	30	28
65°	19	19
75°	10	10
85°	2	3
90°	0	

TEST NUMBER: P1285122

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	702.3
2.5°	698.4
5°	686.9
7.5°	667.0
10°	640.1
12.5°	608.6
15°	570.3
17.5°	530.3
20°	487.4
22.5°	443.6
25°	401.4
27.5°	359.2
30°	317.7
32.5°	275.5
35°	231.8
37.5°	191.1
40°	154.3
42.5°	122.8
45°	95.9
47.5°	69.8
50°	47.6
52.5°	34.5
55°	29.9
57.5°	26.9
60°	24.6
62.5°	21.5
65°	19.2
67.5°	16.1
70°	13.8
72.5°	11.5
75°	10.0
77.5°	7.7
80°	5.4
82.5°	4.6
85°	2.3
87.5°	1.5
90°	0.0

(END OF REPORT)