

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285130

Luminaire Tested: P3AS13R40B2750DE010 E3DLD1WMH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285130
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R40B2750DE010 E3DLD1WMH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R40 optic, 4000K CCT AND, 80CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 687.0 lumens
Efficiency: N/A
Efficacy: 36.0 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285130

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WMH_4000K

Luminous Intensity Polar Plot

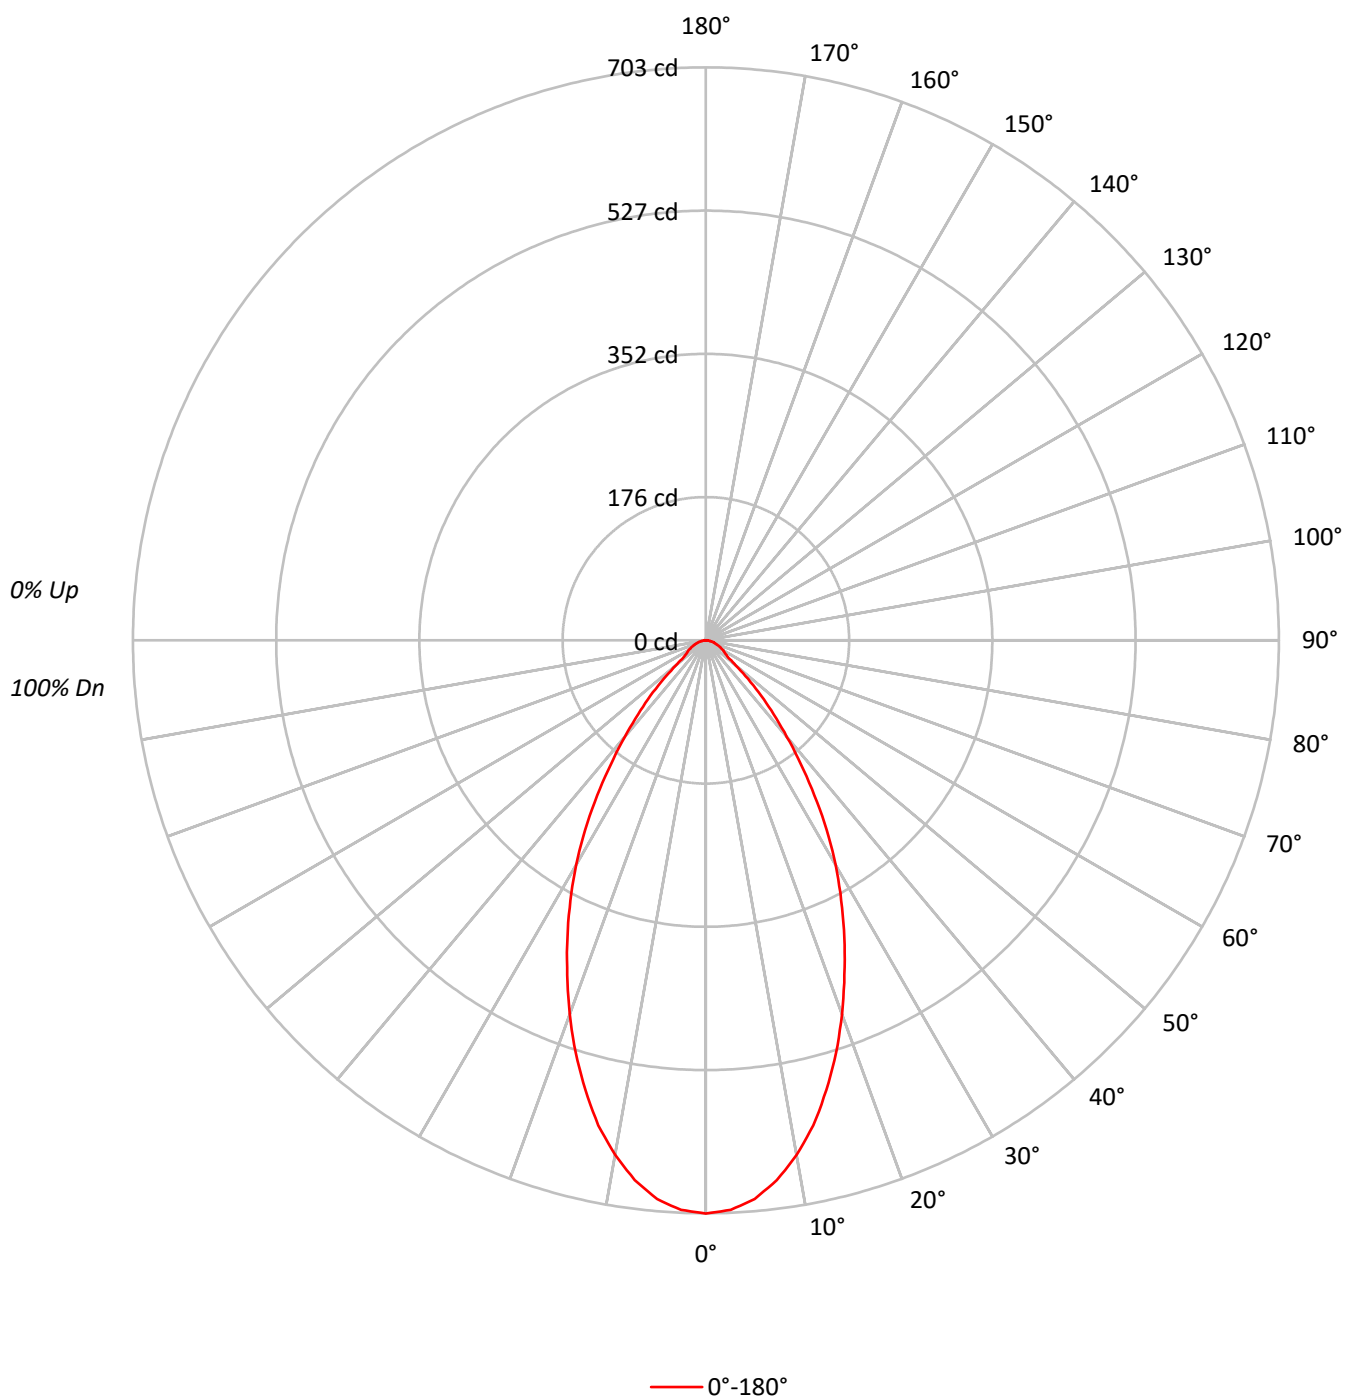

TEST NUMBER: P1285130

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	154220
5°	151419
10°	142727
15°	129649
20°	113900
25°	97264
30°	80569
35°	62131
40°	44226
45°	29802
50°	16272
55°	11469
60°	10789
65°	9962
70°	8848
75°	8472
80°	6819
85°	5787

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 29802 cd/sqm

TEST NUMBER: P1285130

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.2	9.3
10°-20°	159.1	23.2
20°-30°	183.9	26.8
30°-40°	144.9	21.1
40°-50°	74.4	10.8
50°-60°	28.5	4.1
60°-70°	18.8	2.7
70°-80°	10.2	1.5
80°-90°	3.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	407.1	59.3
0°-40°	552.1	80.4
0°-60°	654.9	95.3
0°-90°	687.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	687.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	703	
5°	688	64
15°	571	159
25°	402	184
35°	232	145
45°	96	74
55°	30	28
65°	19	19
75°	10	10
85°	2	3
90°	0	



TEST NUMBER: P1285130

CATALOG NUMBER: P3AS13R40B2750DE010 E3DLD1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	703.3
2.5°	699.4
5°	687.9
7.5°	667.9
10°	641.0
12.5°	609.5
15°	571.1
17.5°	531.1
20°	488.1
22.5°	444.3
25°	402.0
27.5°	359.7
30°	318.2
32.5°	275.9
35°	232.1
37.5°	191.4
40°	154.5
42.5°	123.0
45°	96.1
47.5°	69.9
50°	47.7
52.5°	34.6
55°	30.0
57.5°	26.9
60°	24.6
62.5°	21.5
65°	19.2
67.5°	16.1
70°	13.8
72.5°	11.5
75°	10.0
77.5°	7.7
80°	5.4
82.5°	4.6
85°	2.3
87.5°	1.5
90°	0.0

(END OF REPORT)