

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285342

Luminaire Tested: P3AS13R50B2750DE010 E3DL1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285342
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R50B2750DE010 E3DL1GPH_2700K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 423.1 lumens
Efficiency: N/A
Efficacy: 22.1 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285342

CATALOG NUMBER: P3AS13R50B2750DE010 E3DL1GPH_2700K

Luminous Intensity Polar Plot

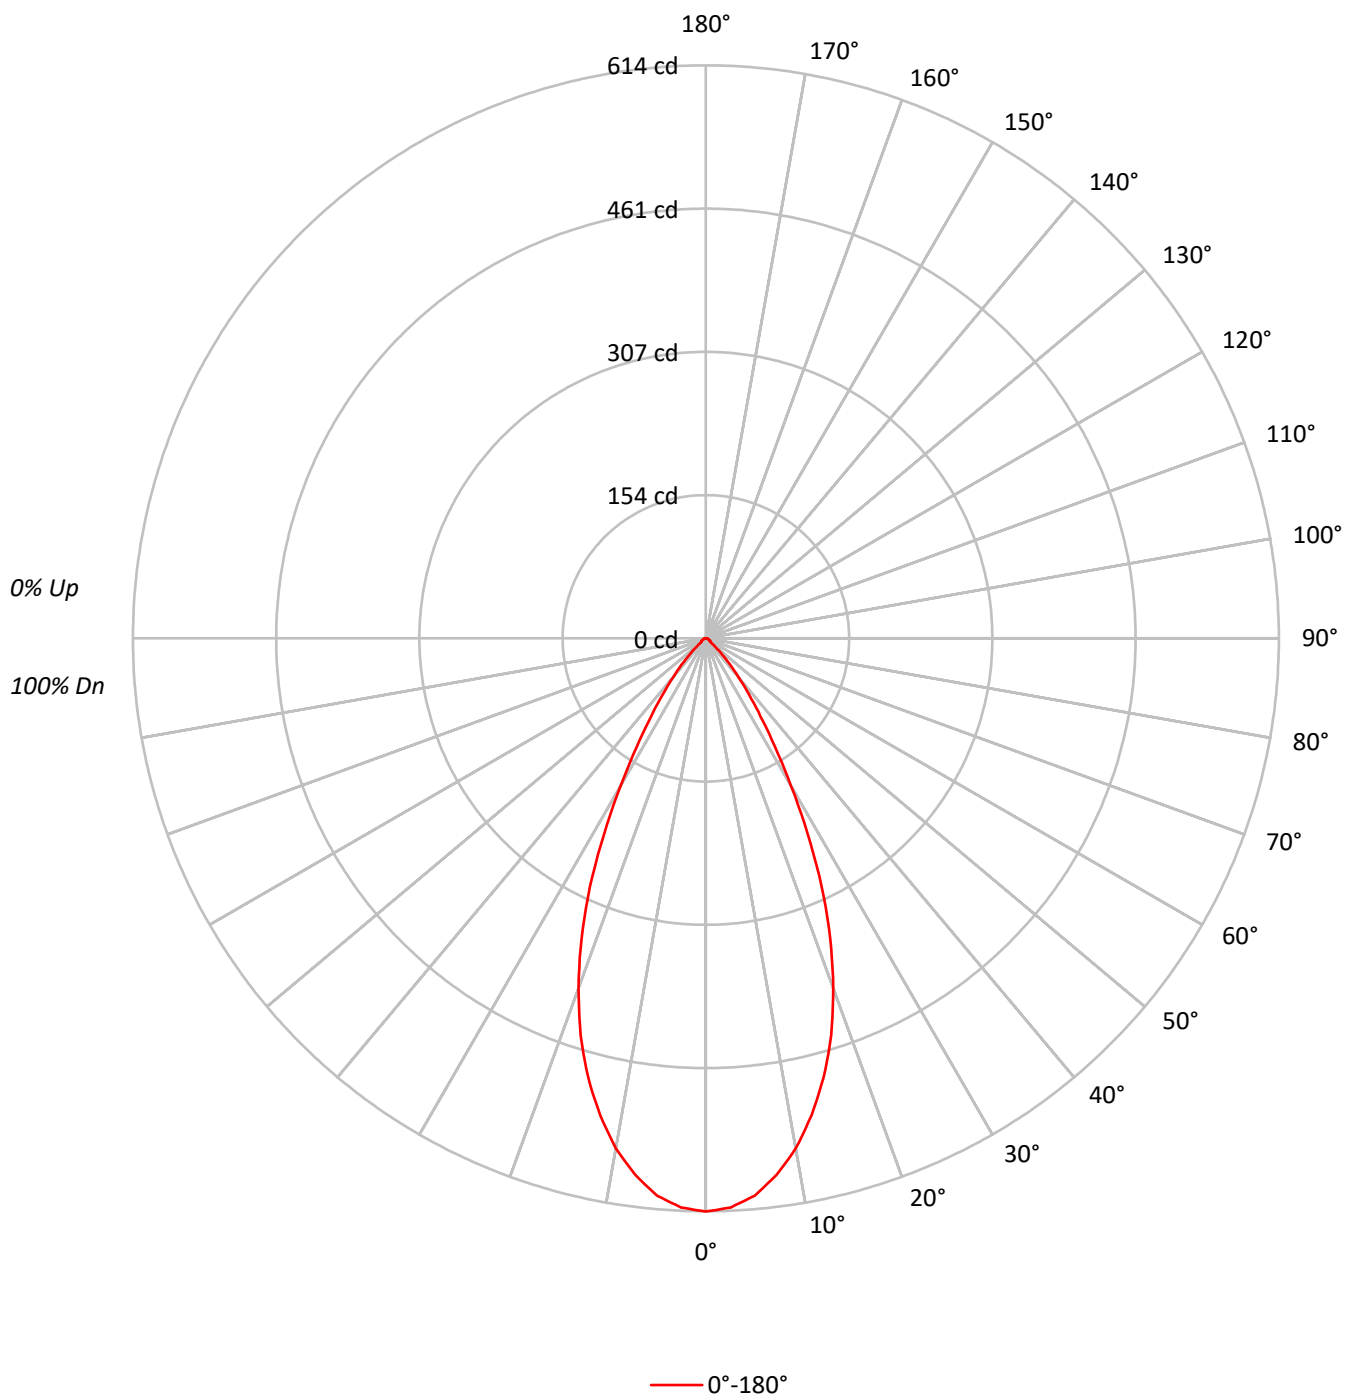

TEST NUMBER: P1285342

CATALOG NUMBER: P3AS13R50B2750DE010 E3DL1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	97	92	88	101	95	91	87	93	89	86		90	87	84		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		75
7	85	76	70	66	84	75	70	66	74	69	66		73	69	65		72
8	81	72	66	62	80	71	66	62	70	65	62		69	65	62		68
9	78	68	63	59	76	68	62	59	67	62	59		66	62	58		65
10	74	65	59	56	73	65	59	56	64	59	55		63	58	55		62

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	134682
5°	131961
10°	123600
15°	110648
20°	93108
25°	71061
30°	46184
35°	27385
40°	15830
45°	7939
50°	2968
55°	2294
60°	2149
65°	1972
70°	1923
75°	1949
80°	1894
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 7939 cd/sqm

TEST NUMBER: P1285342

CATALOG NUMBER: P3AS13R50B2750DE010 E3DL1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.8	13.2
10°-20°	134.8	31.9
20°-30°	132.2	31.3
30°-40°	66.6	15.7
40°-50°	21.1	5.0
50°-60°	5.5	1.3
60°-70°	3.9	0.9
70°-80°	2.4	0.6
80°-90°	0.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	322.8	76.3
0°-40°	389.4	92.1
0°-60°	416.0	98.3
0°-90°	423.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	423.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	614	
5°	600	56
15°	487	135
25°	294	132
35°	102	67
45°	26	21
55°	6	5
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1285342

CATALOG NUMBER: P3AS13R50B2750DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	614.2
2.5°	610.4
5°	599.5
7.5°	579.9
10°	555.1
12.5°	523.2
15°	487.4
17.5°	446.1
20°	399.0
22.5°	348.3
25°	293.7
27.5°	235.8
30°	182.4
32.5°	137.3
35°	102.3
37.5°	75.6
40°	55.3
42.5°	39.1
45°	25.6
47.5°	14.7
50°	8.7
52.5°	6.4
55°	6.0
57.5°	5.3
60°	4.9
62.5°	4.5
65°	3.8
67.5°	3.4
70°	3.0
72.5°	2.6
75°	2.3
77.5°	1.9
80°	1.5
82.5°	1.1
85°	0.8
87.5°	0.4
90°	0.0

(END OF REPORT)