

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285374

Luminaire Tested: P3AS13R50B2750DE010 E3DLD1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285374
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R50B2750DE010 E3DLD1GPH_3500K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R50 optic, 3500K CCT AND, 80CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 333.0 lumens
Efficiency: N/A
Efficacy: 17.4 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285374

CATALOG NUMBER: P3AS13R50B2750DE010 E3DLD1GPH_3500K

Luminous Intensity Polar Plot

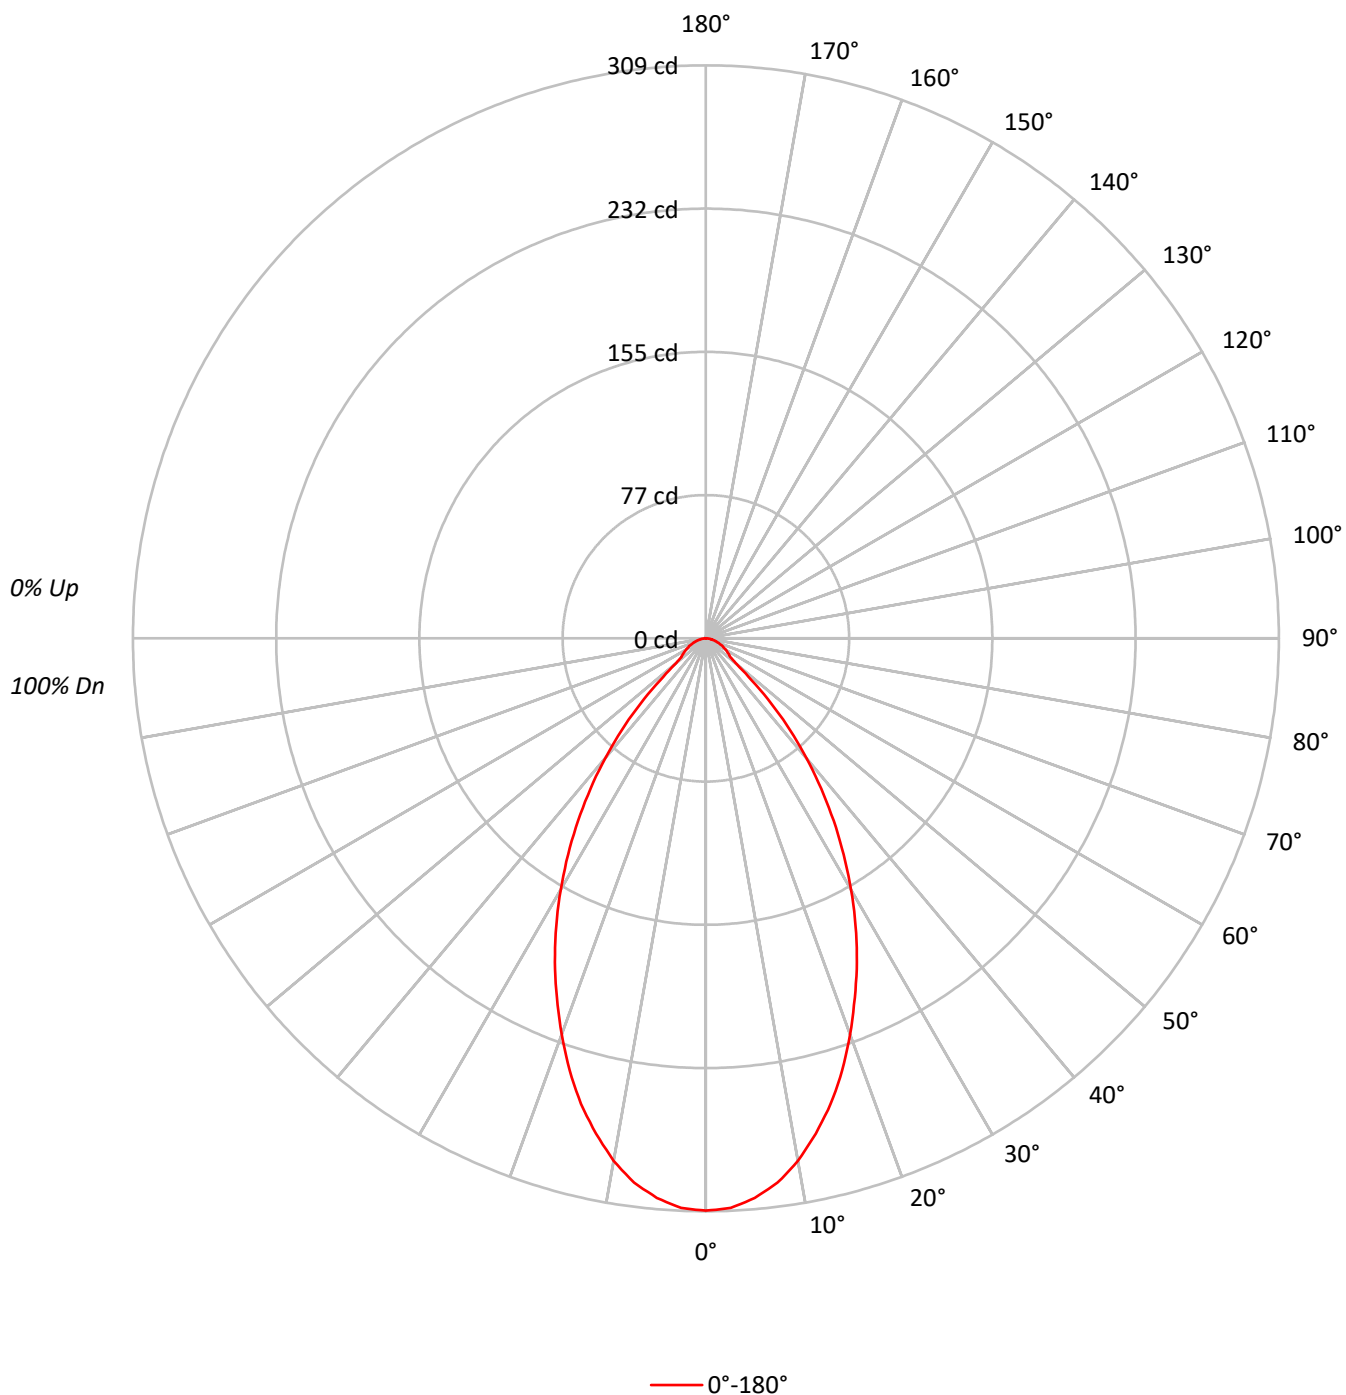



TEST NUMBER: P1285374

CATALOG NUMBER: P3AS13R50B2750DE010 E3DLD1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	102	103	101	99		99	97	96		95
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83
4	93	85	78	73	91	83	77	73	81	76	72		79	75	71		77
5	88	78	72	67	86	77	71	66	75	70	66		74	69	65		72
6	83	73	66	61	81	72	65	61	70	65	60		69	64	60		67
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63
8	74	63	57	52	73	63	56	52	61	56	52		60	55	51		59
9	70	59	53	48	69	59	52	48	58	52	48		57	52	48		56
10	66	56	49	45	65	55	49	45	54	49	45		54	48	45		53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	67670
5°	66674
10°	63726
15°	59024
20°	53041
25°	46624
30°	39652
35°	32150
40°	24160
45°	15568
50°	7403
55°	5811
60°	5482
65°	5137
70°	4616
75°	4151
80°	3788
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15568 cd/sqm

TEST NUMBER: P1285374

CATALOG NUMBER: P3AS13R50B2750DE010 E3DLD1GPH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.4	8.5
10°-20°	72.5	21.8
20°-30°	88.1	26.4
30°-40°	74.7	22.4
40°-50°	38.8	11.7
50°-60°	14.0	4.2
60°-70°	9.7	2.9
70°-80°	5.2	1.6
80°-90°	1.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	188.9	56.7
0°-40°	263.6	79.2
0°-60°	316.4	95.0
0°-90°	333.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	333.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	309	
5°	303	28
15°	260	72
25°	193	88
35°	120	75
45°	50	39
55°	15	14
65°	10	10
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1285374

CATALOG NUMBER: P3AS13R50B2750DE010 E3DLD1GPH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	308.6
2.5°	307.5
5°	302.9
7.5°	296.1
10°	286.2
12.5°	273.6
15°	260.0
17.5°	244.4
20°	227.3
22.5°	209.8
25°	192.7
27.5°	174.8
30°	156.6
32.5°	138.3
35°	120.1
37.5°	102.2
40°	84.4
42.5°	67.3
45°	50.2
47.5°	33.4
50°	21.7
52.5°	16.7
55°	15.2
57.5°	13.7
60°	12.5
62.5°	11.0
65°	9.9
67.5°	8.4
70°	7.2
72.5°	6.1
75°	4.9
77.5°	3.8
80°	3.0
82.5°	2.3
85°	1.5
87.5°	0.8
90°	0.0

(END OF REPORT)