

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285541

Luminaire Tested: P3AS13R55B2750DE010 E3DLD1WH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285541
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R55B2750DE010 E3DLD1WH_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R55 optic, 5000K CCT AND, 80CRI , E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 695.0 lumens
Efficiency: N/A
Efficacy: 36.4 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285541

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLD1WH_5000K

Luminous Intensity Polar Plot

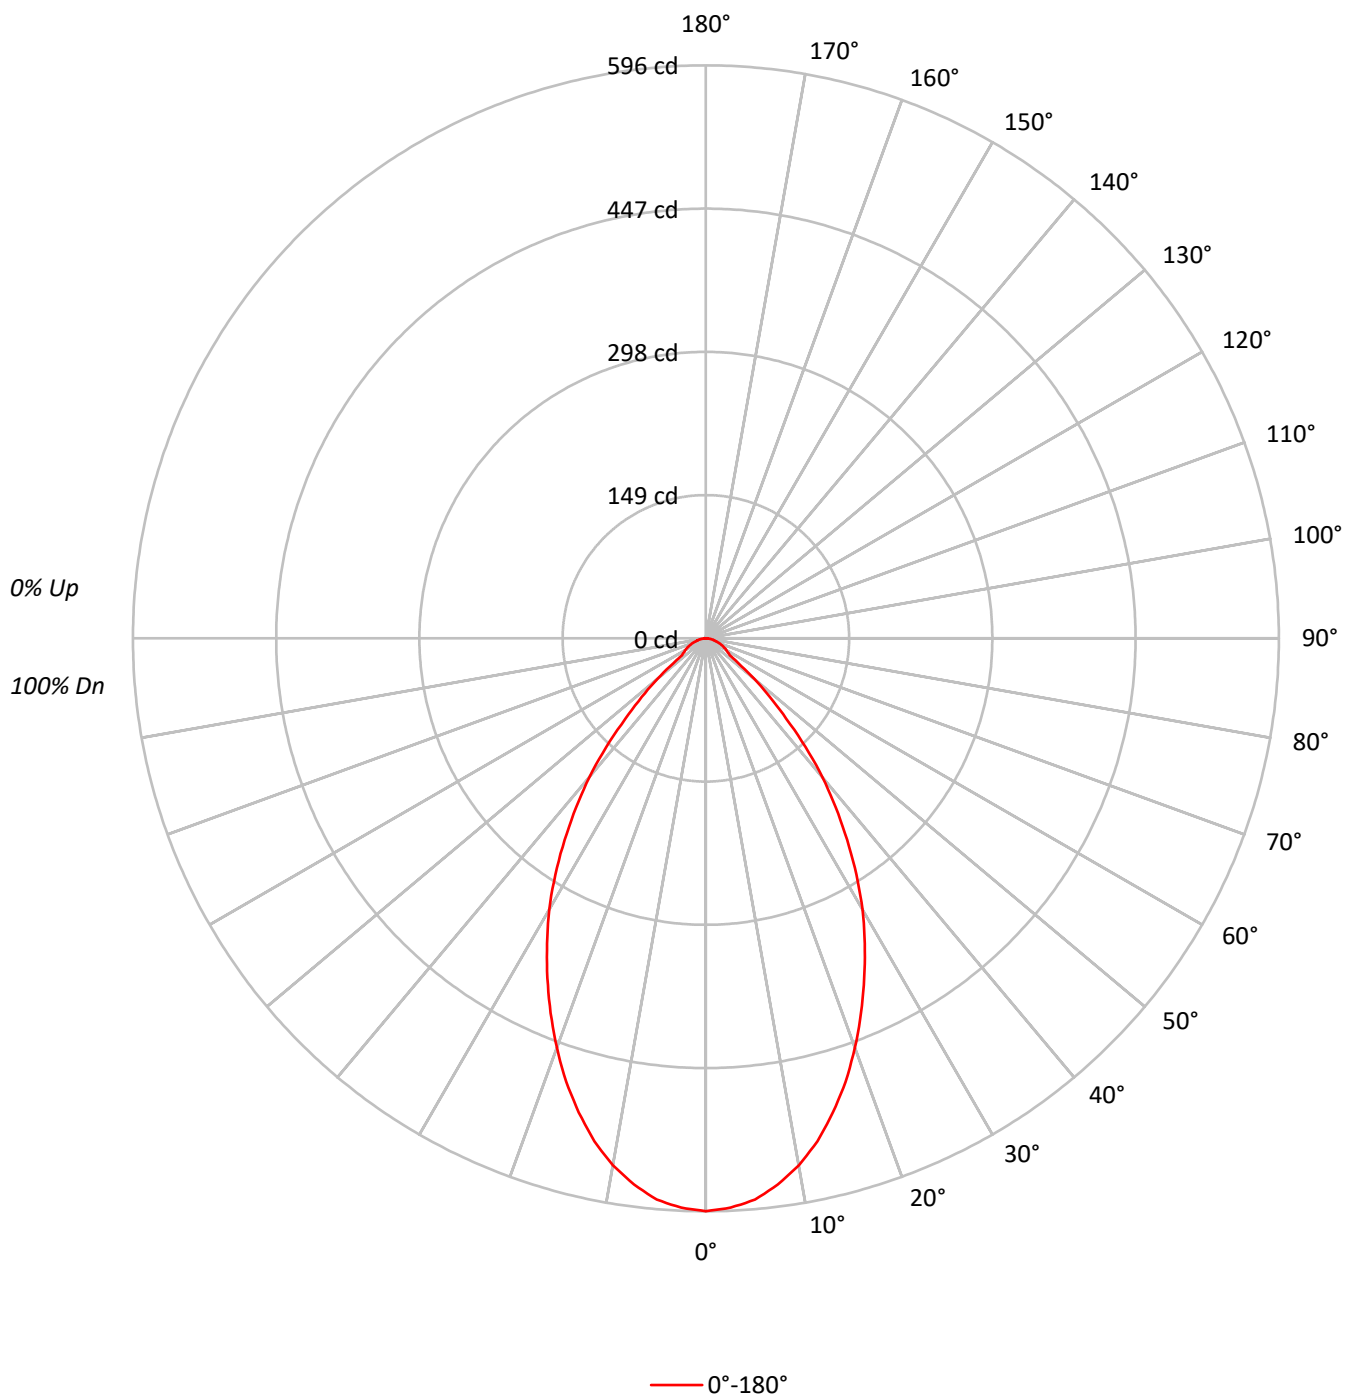



TEST NUMBER: P1285541

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLD1WH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	103		110	107	104	102		103	100	98		99	97	95		95	94	93
2	105	100	95	91		103	98	93	90		94	91	88		91	88	86		89	86	84
3	99	91	85	81		97	90	84	80		87	82	79		85	81	77		82	79	76
4	93	84	77	72		91	83	77	72		80	75	71		78	74	70		76	73	69
5	87	77	71	66		85	76	70	65		75	69	65		73	68	64		71	67	64
6	82	72	65	60		80	71	64	60		69	64	59		68	63	59		66	62	58
7	77	67	60	55		76	66	59	55		65	59	54		63	58	54		62	57	54
8	73	62	55	51		72	62	55	51		60	55	50		59	54	50		58	53	50
9	69	58	51	47		68	58	51	47		57	51	47		56	50	46		55	50	46
10	65	55	48	44		64	54	48	44		53	47	43		52	47	43		52	47	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	130669
5°	129011
10°	123912
15°	115914
20°	105733
25°	94336
30°	82519
35°	68556
40°	54044
45°	36655
50°	22413
55°	11622
60°	10789
65°	10222
70°	9489
75°	8388
80°	8334
85°	6290

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 36655 cd/sqm

TEST NUMBER: P1285541

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLD1WH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.0	7.9
10°-20°	142.7	20.5
20°-30°	178.7	25.7
30°-40°	159.5	23.0
40°-50°	93.4	13.4
50°-60°	32.3	4.6
60°-70°	19.5	2.8
70°-80°	10.8	1.6
80°-90°	3.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	376.4	54.2
0°-40°	535.9	77.1
0°-60°	661.6	95.2
0°-90°	695.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	695.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	596	
5°	586	55
15°	511	143
25°	390	179
35°	256	160
45°	118	93
55°	30	32
65°	20	19
75°	10	11
85°	2	3
90°	0	

TEST NUMBER: P1285541

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLD1WH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	595.9
2.5°	592.7
5°	586.1
7.5°	573.0
10°	556.5
12.5°	536.0
15°	510.6
17.5°	483.5
20°	453.1
22.5°	421.9
25°	389.9
27.5°	357.9
30°	325.9
32.5°	291.4
35°	256.1
37.5°	221.6
40°	188.8
42.5°	153.5
45°	118.2
47.5°	90.3
50°	65.7
52.5°	42.7
55°	30.4
57.5°	27.1
60°	24.6
62.5°	22.2
65°	19.7
67.5°	17.2
70°	14.8
72.5°	12.3
75°	9.9
77.5°	8.2
80°	6.6
82.5°	4.1
85°	2.5
87.5°	1.6
90°	0.0

(END OF REPORT)