

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285568

Luminaire Tested: P3AS13R55B2750DE010 E3DLP1WH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285568
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R55B2750DE010 E3DLP1WH_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R55 optic, 3000K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 824.0 lumens
Efficiency: N/A
Efficacy: 43.1 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285568

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLP1WH_3000K

Luminous Intensity Polar Plot

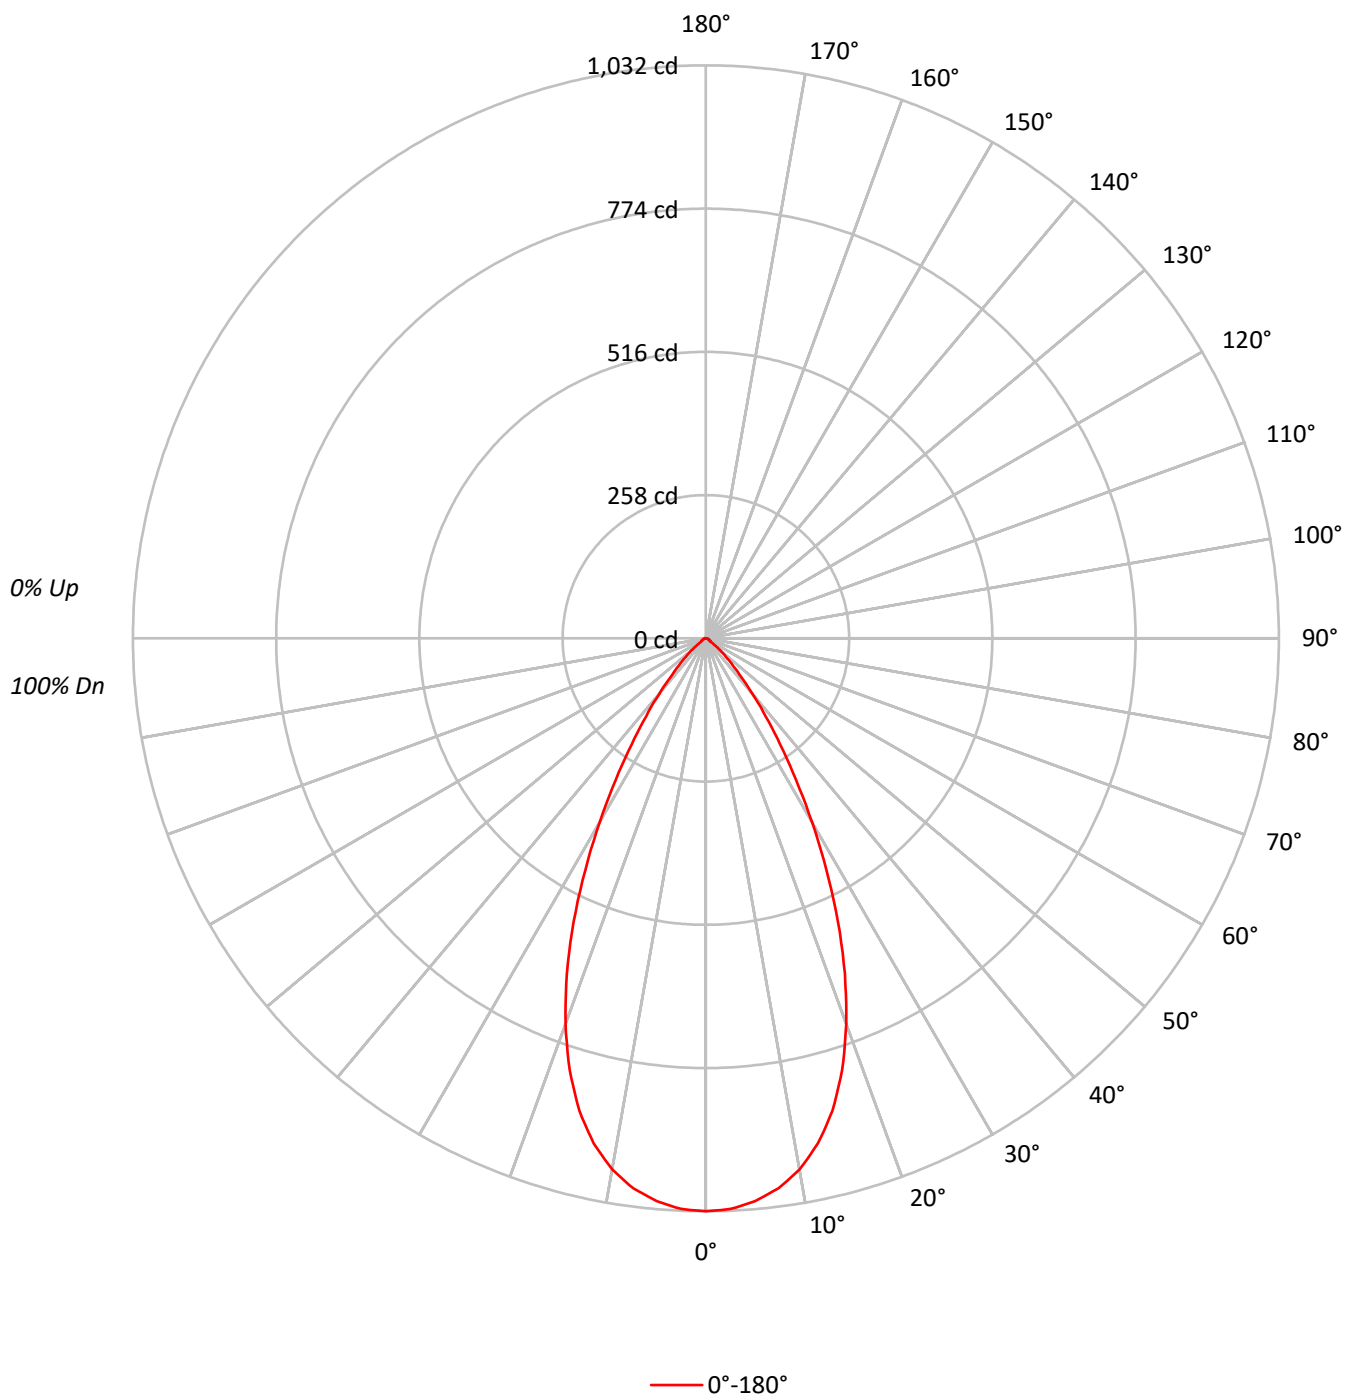

TEST NUMBER: P1285568

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLP1WH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97	96	95		93
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92	90	88		87
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87	85	82		81
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		82	79	77		75
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78	75	72		70
6	88	79	73	69	86	78	73	68	77	72	68		75	71	68		74	70	67		66
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70	66	63		62
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67	62	59		58
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63	59	56		55
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60	56	53		52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	226254
5°	223970
10°	216295
15°	199933
20°	172518
25°	136266
30°	96648
35°	62319
40°	37442
45°	21087
50°	11360
55°	4052
60°	3640
65°	3528
70°	3398
75°	3219
80°	2904
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21087 cd/sqm

TEST NUMBER: P1285568

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLP1WH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.7	11.6
10°-20°	243.5	29.6
20°-30°	255.2	31.0
30°-40°	148.9	18.1
40°-50°	55.7	6.8
50°-60°	13.1	1.6
60°-70°	6.7	0.8
70°-80°	4.0	0.5
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	594.4	72.1
0°-40°	743.3	90.2
0°-60°	812.2	98.6
0°-90°	824.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	824.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1032	
5°	1018	96
15°	881	244
25°	563	255
35°	233	149
45°	68	56
55°	11	13
65°	7	7
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1285568

CATALOG NUMBER: P3AS13R55B2750DE010 E3DLP1WH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1031.8
2.5°	1028.8
5°	1017.5
7.5°	999.3
10°	971.4
12.5°	932.1
15°	880.7
17.5°	815.7
20°	739.3
22.5°	653.9
25°	563.2
27.5°	470.2
30°	381.7
32.5°	301.6
35°	232.8
37.5°	176.9
40°	130.8
42.5°	93.7
45°	68.0
47.5°	49.1
50°	33.3
52.5°	18.9
55°	10.6
57.5°	9.1
60°	8.3
62.5°	7.6
65°	6.8
67.5°	6.0
70°	5.3
72.5°	4.5
75°	3.8
77.5°	3.0
80°	2.3
82.5°	1.5
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)