

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285584

Luminaire Tested: P3AS13R60B2750DE010 E3CB1MMS_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285584
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R60B2750DE010 E3CB1MMS_3500K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R60 optic, 3500K CCT AND, 80CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1003.0 lumens
Efficiency: N/A
Efficacy: 52.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285584

CATALOG NUMBER: P3AS13R60B2750DE010 E3CB1MMS_3500K

Luminous Intensity Polar Plot

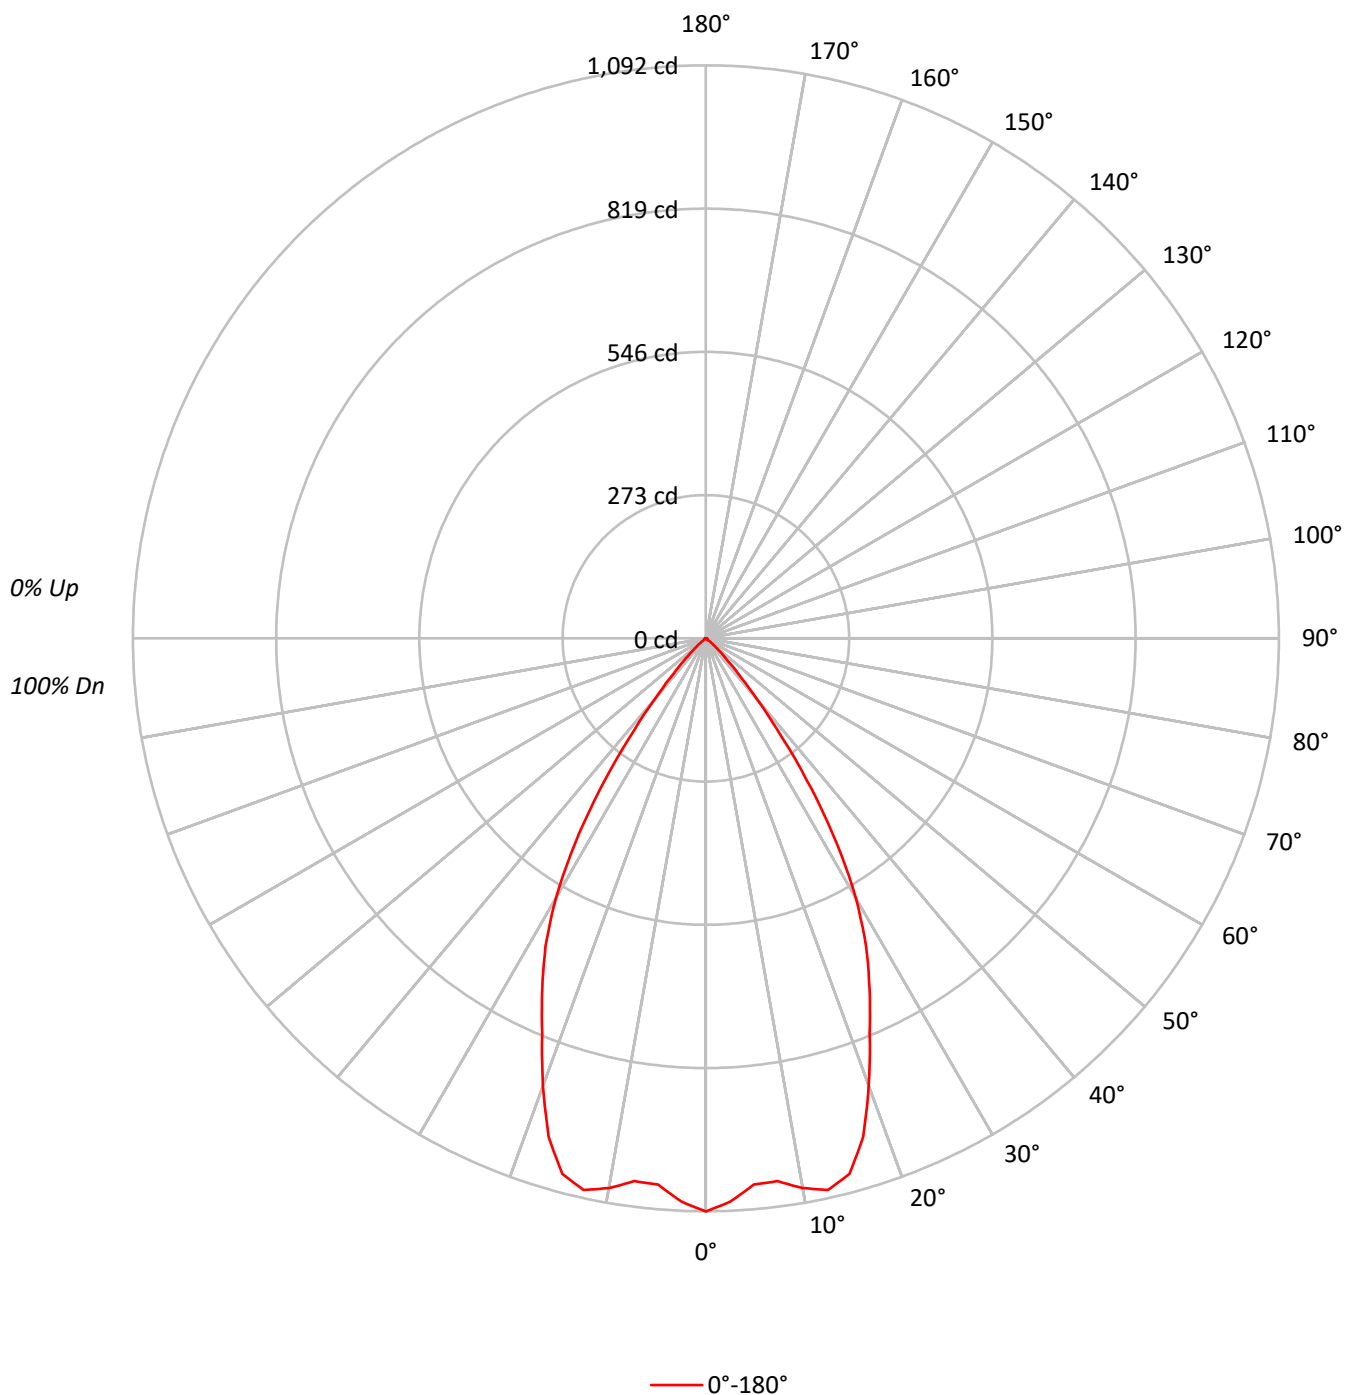

TEST NUMBER: P1285584

CATALOG NUMBER: P3AS13R60B2750DE010 E3CB1MMS_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	114	111	108	106	111	109	106	104	105	103	101		101	100	98		97	96	95		94
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93	91	89		87
3	103	96	91	88	101	95	90	87	92	89	85		90	87	84		88	85	83		81
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83	80	77		76
5	93	84	79	74	91	84	78	74	82	77	73		80	76	73		79	75	72		71
6	88	79	73	69	87	79	73	69	77	72	68		76	71	68		74	70	68		66
7	84	75	69	64	82	74	68	64	73	68	64		71	67	64		70	66	63		62
8	80	70	64	60	78	70	64	60	69	64	60		68	63	60		67	62	59		58
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63	59	56		55
10	72	63	57	53	71	62	57	53	62	56	53		61	56	53		60	56	53		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	239520
5°	230002
10°	236825
15°	239865
20°	211792
25°	178486
30°	144756
35°	94281
40°	43310
45°	16591
50°	5561
55°	1491
60°	1360
65°	1193
70°	1026
75°	1356
80°	1010
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16591 cd/sqm

TEST NUMBER: P1285584

CATALOG NUMBER: P3AS13R60B2750DE010 E3CB1MMS_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.6	10.0
10°-20°	289.3	28.8
20°-30°	337.5	33.6
30°-40°	217.8	21.7
40°-50°	48.8	4.9
50°-60°	4.9	0.5
60°-70°	2.3	0.2
70°-80°	1.4	0.1
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	727.4	72.5
0°-40°	945.2	94.2
0°-60°	998.8	99.6
0°-90°	1003.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1003.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1092	
5°	1045	101
15°	1057	289
25°	738	337
35°	352	218
45°	54	49
55°	4	5
65°	2	2
75°	2	1
85°	1	1
90°	0	

TEST NUMBER: P1285584

CATALOG NUMBER: P3AS13R60B2750DE010 E3CB1MMS_3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1092.3
2.5°	1074.4
5°	1044.9
7.5°	1043.4
10°	1063.6
12.5°	1076.7
15°	1056.6
17.5°	996.1
20°	907.6
22.5°	815.3
25°	737.7
27.5°	661.7
30°	571.7
32.5°	466.2
35°	352.2
37.5°	240.5
40°	151.3
42.5°	90.8
45°	53.5
47.5°	31.0
50°	16.3
52.5°	5.4
55°	3.9
57.5°	3.1
60°	3.1
62.5°	2.3
65°	2.3
67.5°	2.3
70°	1.6
72.5°	1.6
75°	1.6
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0

(END OF REPORT)