

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285665

Luminaire Tested: P3AS13R60B2750DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285665
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R60B2750DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R60 optic, 4000K CCT AND, 80CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 311.1 lumens
Efficiency: N/A
Efficacy: 16.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285665

CATALOG NUMBER: P3AS13R60B2750DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

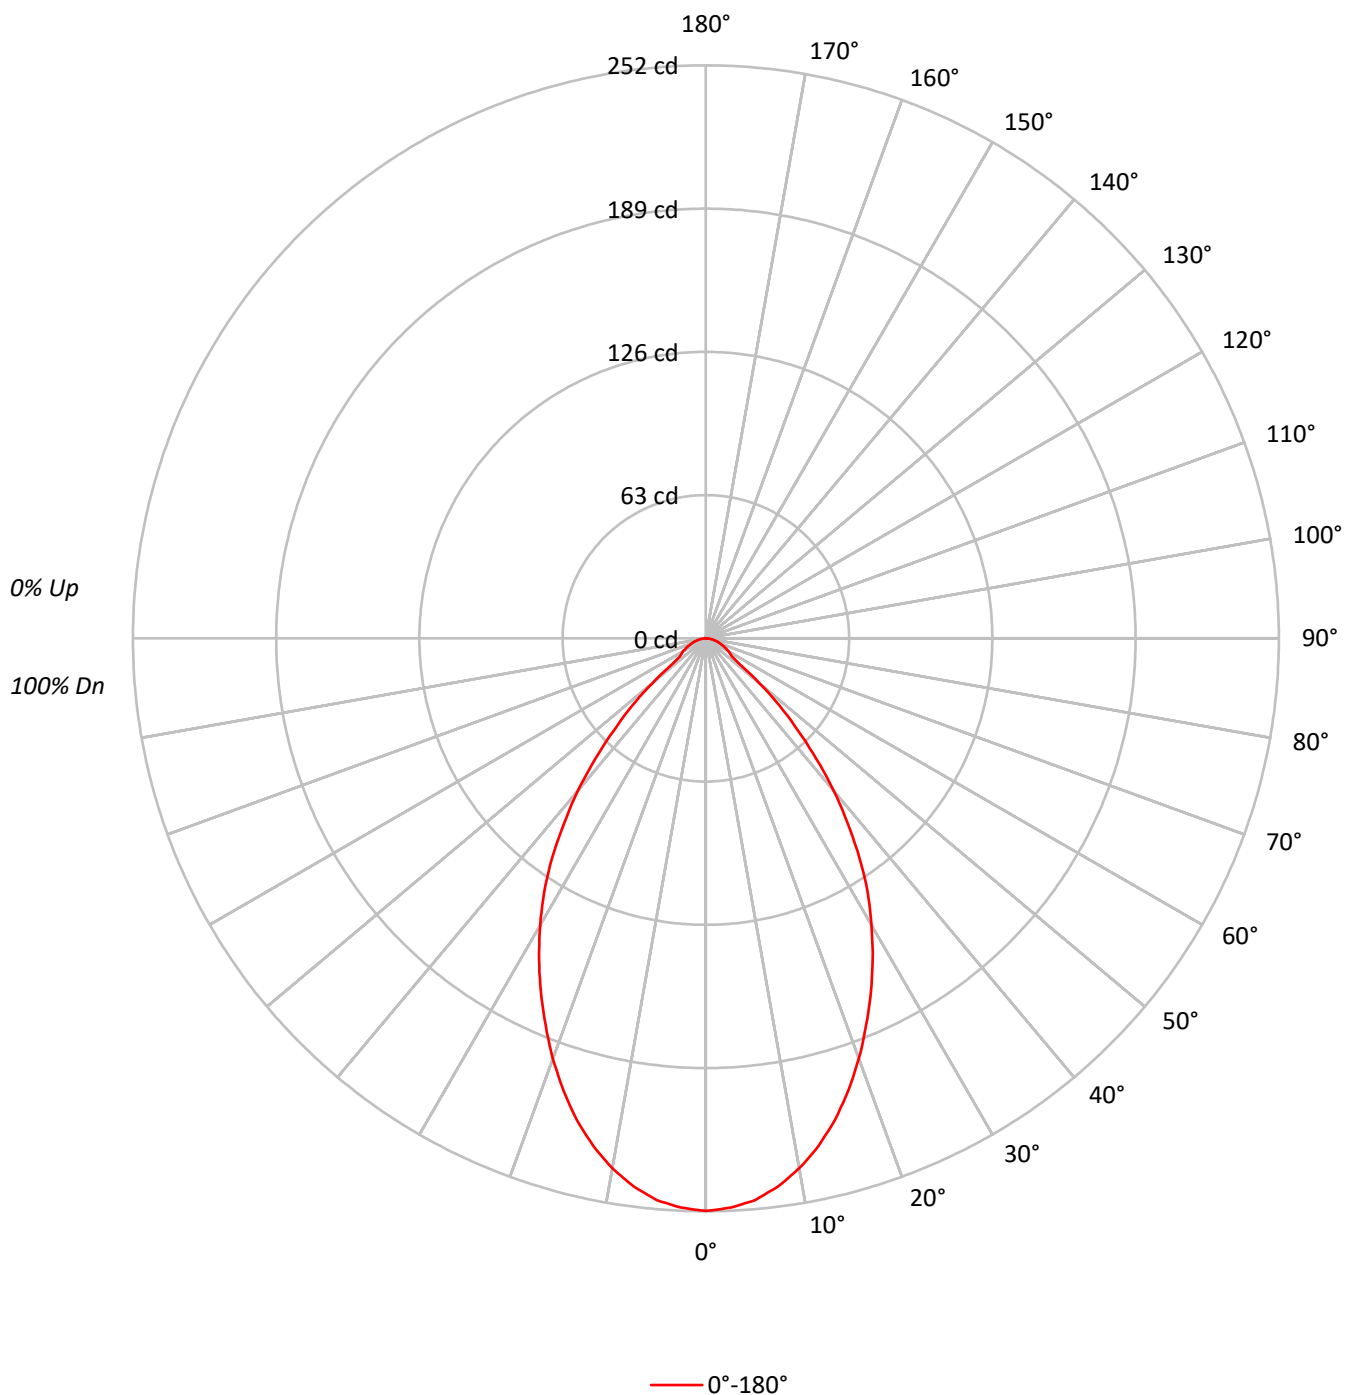

TEST NUMBER: P1285665

CATALOG NUMBER: P3AS13R60B2750DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91		
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82		
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74		
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67		
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61		
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56		
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51		
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47		
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44		
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	55215
5°	54589
10°	52704
15°	49785
20°	45901
25°	41543
30°	36892
35°	31534
40°	25076
45°	17676
50°	10575
55°	5352
60°	5131
65°	4722
70°	4360
75°	4151
80°	3788
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 17676 cd/sqm

TEST NUMBER: P1285665

CATALOG NUMBER: P3AS13R60B2750DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.3	7.5
10°-20°	61.3	19.7
20°-30°	78.7	25.3
30°-40°	73.0	23.5
40°-50°	44.4	14.3
50°-60°	14.8	4.8
60°-70°	9.0	2.9
70°-80°	5.1	1.6
80°-90°	1.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	163.3	52.5
0°-40°	236.3	76.0
0°-60°	295.5	95.0
0°-90°	311.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	311.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	252	
5°	248	23
15°	219	61
25°	172	79
35°	118	73
45°	57	44
55°	14	15
65°	9	9
75°	5	5
85°	1	1
90°	0	

TEST NUMBER: P1285665

CATALOG NUMBER: P3AS13R60B2750DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	251.8
2.5°	250.6
5°	248.0
7.5°	243.1
10°	236.7
12.5°	228.7
15°	219.3
17.5°	208.4
20°	196.7
22.5°	184.2
25°	171.7
27.5°	158.9
30°	145.7
32.5°	132.5
35°	117.8
37.5°	102.3
40°	87.6
42.5°	72.1
45°	57.0
47.5°	44.2
50°	31.0
52.5°	18.5
55°	14.0
57.5°	12.8
60°	11.7
62.5°	10.2
65°	9.1
67.5°	7.9
70°	6.8
72.5°	5.7
75°	4.9
77.5°	3.8
80°	3.0
82.5°	1.9
85°	1.1
87.5°	0.8
90°	0.0

(END OF REPORT)