

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285820

Luminaire Tested: P3AS13R65B2750DE010 E3DLD1LI\_4000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1285820  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R65B2750DE010 E3DLD1LI\_4000K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R65 optic, 4000K CCT AND, 80CRI , E3DLD1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 606.0 lumens  
Efficiency: N/A  
Efficacy: 31.7 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1285820

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLD1LI\_4000K

### Luminous Intensity Polar Plot

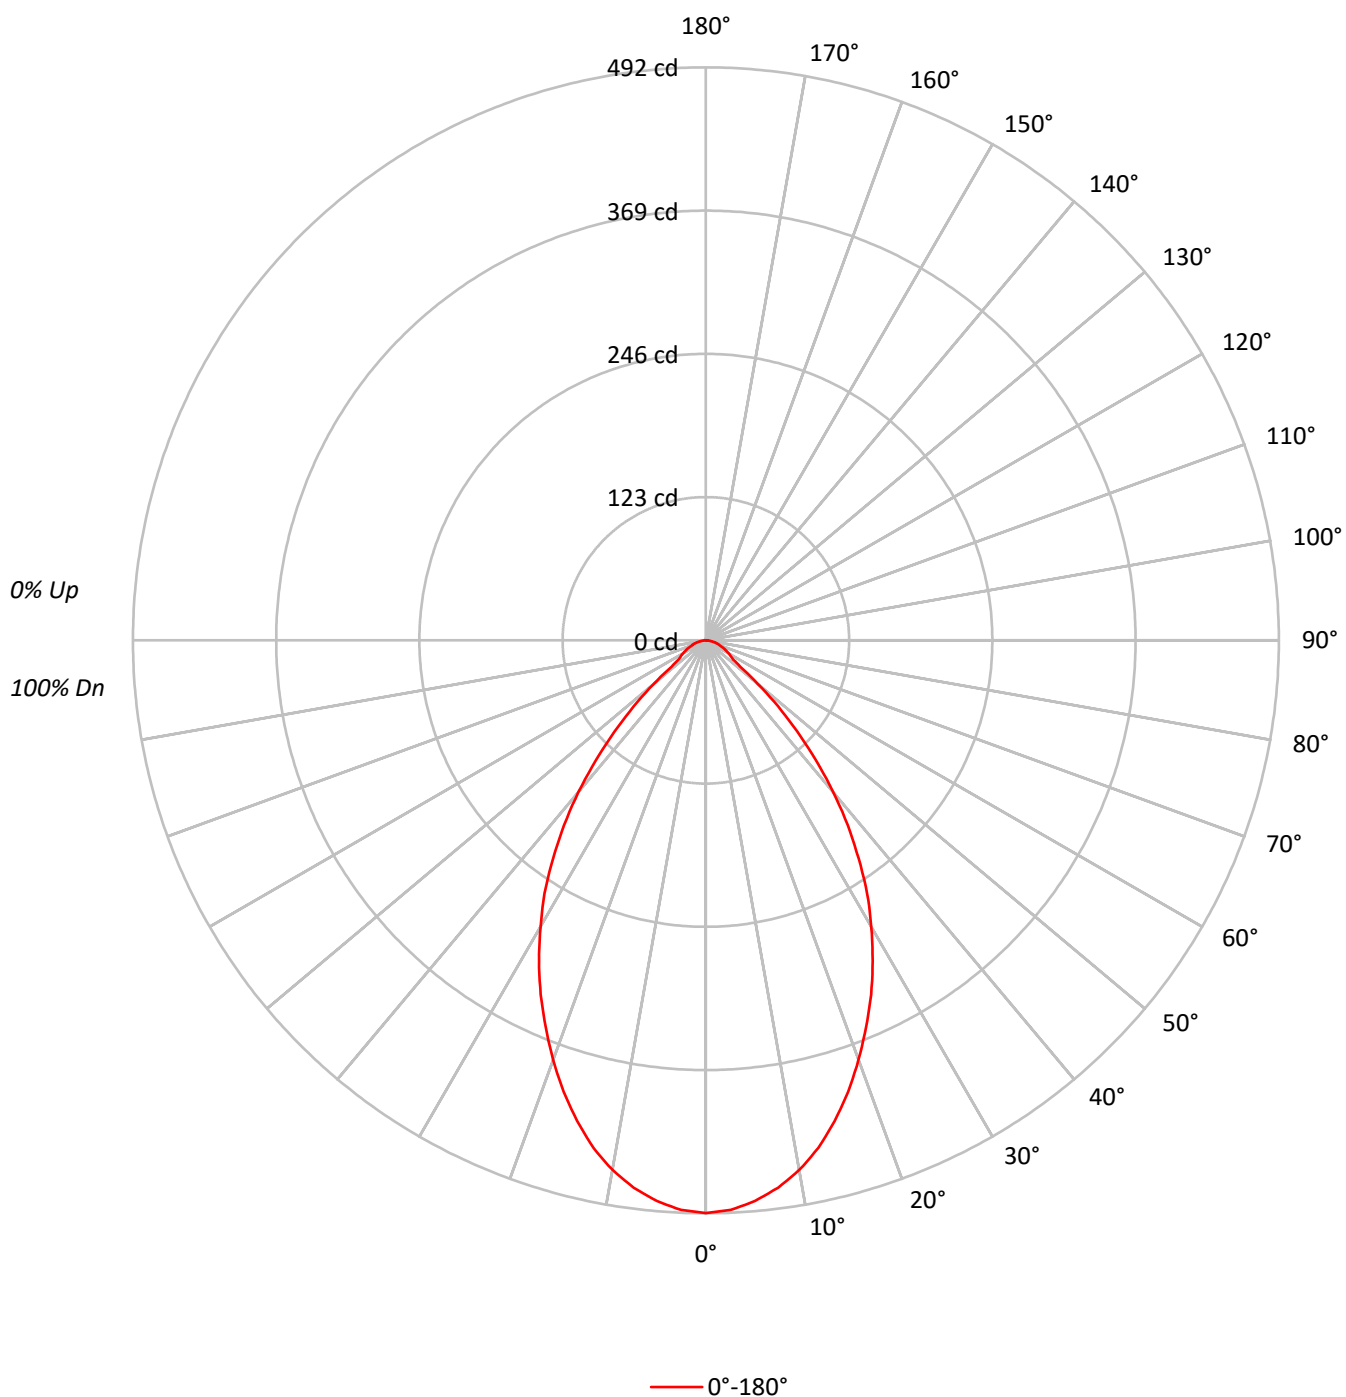

TEST NUMBER: P1285820

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLD1LI\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |  |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |     |     |  | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |  | 100 |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 101 | 102 | 100 | 98  |  | 99  | 97  | 95  |  | 95  | 94  | 93  |  | 91  |
| 2   | 105 | 99  | 94  | 90  | 103 | 97  | 93  | 89  | 94  | 90  | 87  |  | 91  | 88  | 85  |  | 88  | 86  | 84  |  | 82  |
| 3   | 99  | 91  | 85  | 80  | 96  | 89  | 84  | 79  | 87  | 82  | 78  |  | 84  | 80  | 77  |  | 82  | 78  | 76  |  | 74  |
| 4   | 92  | 83  | 77  | 72  | 90  | 82  | 76  | 71  | 80  | 75  | 70  |  | 78  | 73  | 70  |  | 76  | 72  | 69  |  | 67  |
| 5   | 87  | 77  | 70  | 65  | 85  | 76  | 69  | 65  | 74  | 68  | 64  |  | 72  | 67  | 63  |  | 71  | 66  | 63  |  | 61  |
| 6   | 82  | 71  | 64  | 59  | 80  | 70  | 64  | 59  | 69  | 63  | 58  |  | 67  | 62  | 58  |  | 66  | 61  | 58  |  | 56  |
| 7   | 77  | 66  | 59  | 54  | 75  | 65  | 59  | 54  | 64  | 58  | 54  |  | 63  | 57  | 53  |  | 61  | 57  | 53  |  | 51  |
| 8   | 72  | 61  | 55  | 50  | 71  | 61  | 54  | 50  | 60  | 54  | 49  |  | 59  | 53  | 49  |  | 58  | 53  | 49  |  | 47  |
| 9   | 68  | 57  | 51  | 46  | 67  | 57  | 50  | 46  | 56  | 50  | 46  |  | 55  | 49  | 46  |  | 54  | 49  | 45  |  | 44  |
| 10  | 65  | 54  | 47  | 43  | 64  | 53  | 47  | 43  | 52  | 47  | 43  |  | 52  | 46  | 42  |  | 51  | 46  | 42  |  | 41  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 107842 |
| 5°  | 106383 |
| 10° | 102826 |
| 15° | 96959  |
| 20° | 89444  |
| 25° | 81198  |
| 30° | 71910  |
| 35° | 61194  |
| 40° | 48691  |
| 45° | 34360  |
| 50° | 19957  |
| 55° | 10896  |
| 60° | 10131  |
| 65° | 9184   |
| 70° | 8399   |
| 75° | 7795   |
| 80° | 6819   |
| 85° | 5787   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 34360 cd/sqm

TEST NUMBER: P1285820

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLD1LI\_4000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 45.5   | 7.5       |
| 10°-20°   | 119.5  | 19.7      |
| 20°-30°   | 153.6  | 25.3      |
| 30°-40°   | 142.1  | 23.4      |
| 40°-50°   | 85.8   | 14.2      |
| 50°-60°   | 29.3   | 4.8       |
| 60°-70°   | 17.6   | 2.9       |
| 70°-80°   | 9.9    | 1.6       |
| 80°-90°   | 2.8    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 318.5  | 52.6      |
| 0°-40°    | 460.6  | 76.0      |
| 0°-60°    | 575.6  | 95.0      |
| 0°-90°    | 606.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 606.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 492 |      |
| 5°  | 483 | 45   |
| 15° | 427 | 120  |
| 25° | 336 | 154  |
| 35° | 229 | 142  |
| 45° | 111 | 86   |
| 55° | 28  | 29   |
| 65° | 18  | 18   |
| 75° | 9   | 10   |
| 85° | 2   | 3    |
| 90° | 0   |      |

TEST NUMBER: P1285820

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLD1LI\_4000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 491.8 |
| 2.5°  | 489.5 |
| 5°    | 483.3 |
| 7.5°  | 474.1 |
| 10°   | 461.8 |
| 12.5° | 446.4 |
| 15°   | 427.1 |
| 17.5° | 406.4 |
| 20°   | 383.3 |
| 22.5° | 359.4 |
| 25°   | 335.6 |
| 27.5° | 310.2 |
| 30°   | 284.0 |
| 32.5° | 257.8 |
| 35°   | 228.6 |
| 37.5° | 200.1 |
| 40°   | 170.1 |
| 42.5° | 140.1 |
| 45°   | 110.8 |
| 47.5° | 83.9  |
| 50°   | 58.5  |
| 52.5° | 36.9  |
| 55°   | 28.5  |
| 57.5° | 25.4  |
| 60°   | 23.1  |
| 62.5° | 20.0  |
| 65°   | 17.7  |
| 67.5° | 15.4  |
| 70°   | 13.1  |
| 72.5° | 11.5  |
| 75°   | 9.2   |
| 77.5° | 7.7   |
| 80°   | 5.4   |
| 82.5° | 3.8   |
| 85°   | 2.3   |
| 87.5° | 1.5   |
| 90°   | 0.0   |

(END OF REPORT)