

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1285863

Luminaire Tested: P3AS13R65B2750DE010 E3DLP1WMH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1285863
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R65B2750DE010 E3DLP1WMH_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R65 optic, 3000K CCT AND, 90CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 524.0 lumens
Efficiency: N/A
Efficacy: 27.4 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1285863

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLP1WMH_3000K

Luminous Intensity Polar Plot

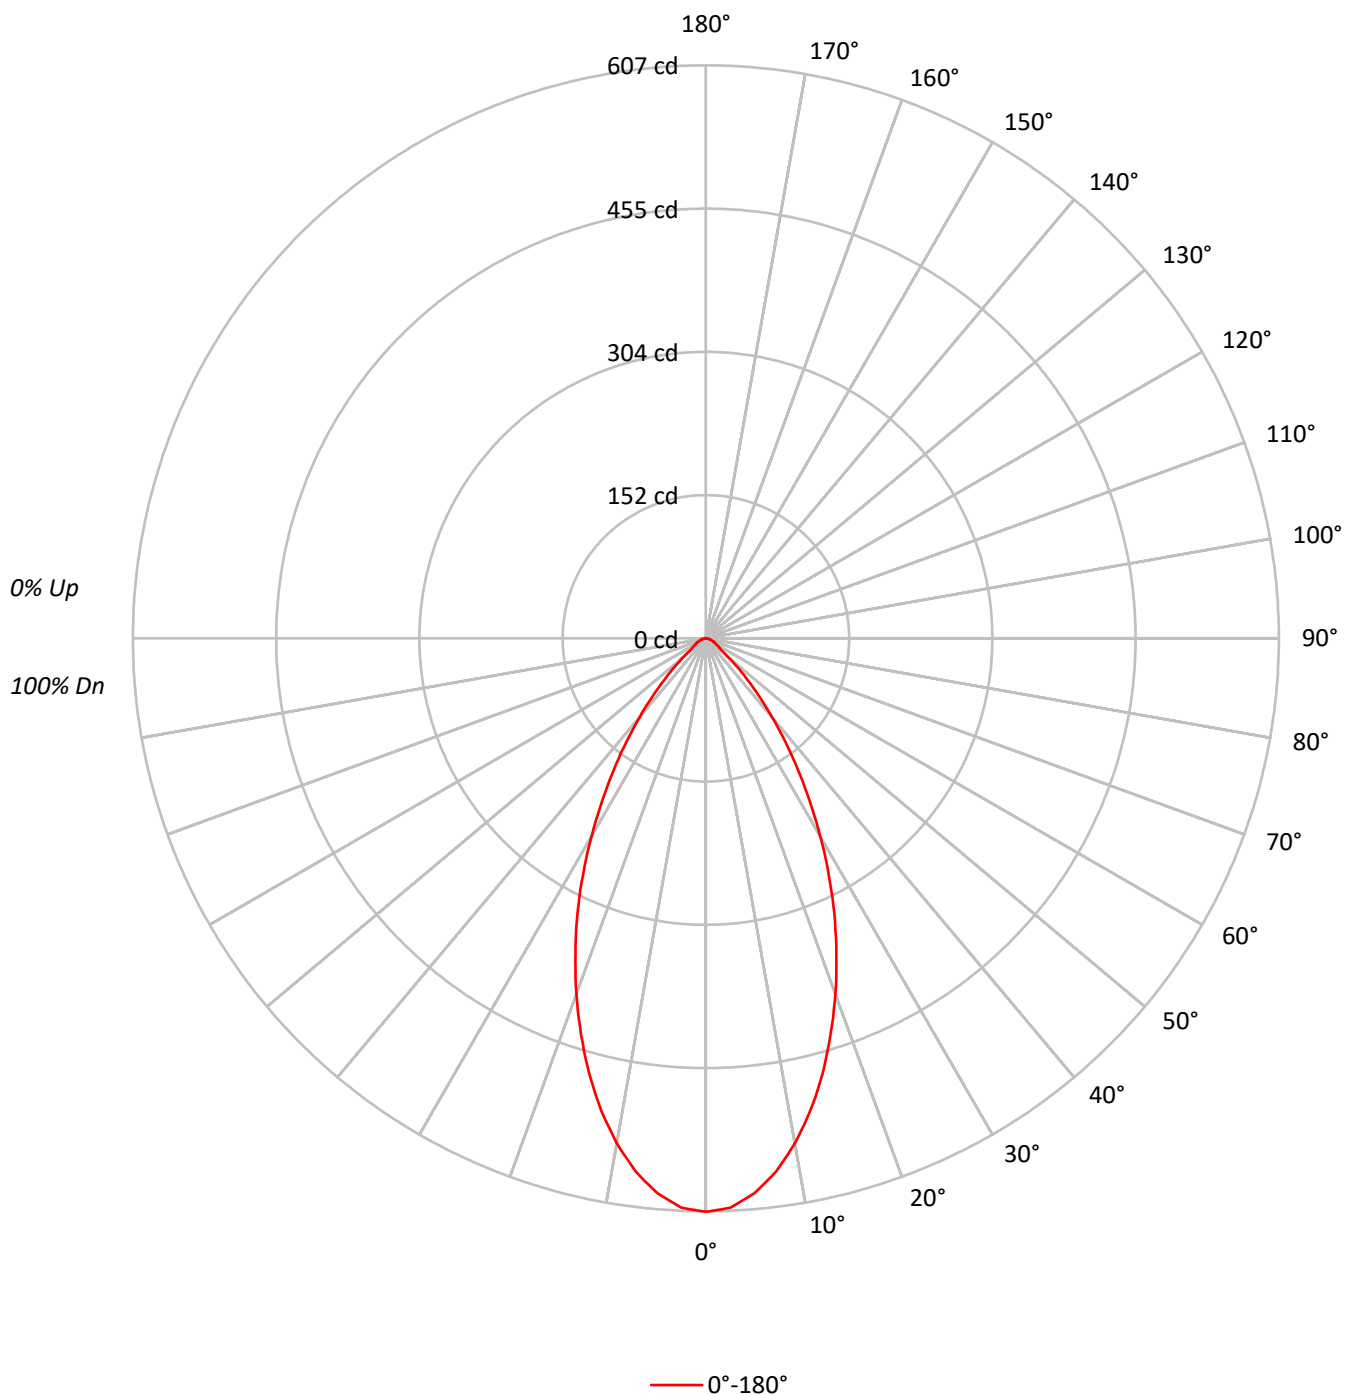

TEST NUMBER: P1285863

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLP1WMH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		90
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	133191
5°	129870
10°	120951
15°	108400
20°	93621
25°	77859
30°	61402
35°	45508
40°	31344
45°	19444
50°	10575
55°	6652
60°	5614
65°	5085
70°	4360
75°	3813
80°	3788
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 19444 cd/sqm

TEST NUMBER: P1285863

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLP1WMH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.8	10.5
10°-20°	132.7	25.3
20°-30°	146.7	28.0
30°-40°	106.6	20.3
40°-50°	49.9	9.5
50°-60°	16.8	3.2
60°-70°	9.7	1.8
70°-80°	5.1	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	334.2	63.8
0°-40°	440.8	84.1
0°-60°	507.6	96.9
0°-90°	524.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	524.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	607	
5°	590	55
15°	478	133
25°	322	147
35°	170	107
45°	63	50
55°	17	17
65°	10	10
75°	4	5
85°	2	2
90°	0	



TEST NUMBER: P1285863

CATALOG NUMBER: P3AS13R65B2750DE010 E3DLP1WMH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	607.4
2.5°	603.6
5°	590.0
7.5°	569.6
10°	543.2
12.5°	512.2
15°	477.5
17.5°	439.7
20°	401.2
22.5°	361.1
25°	321.8
27.5°	281.8
30°	242.5
32.5°	204.7
35°	170.0
37.5°	138.3
40°	109.5
42.5°	83.9
45°	62.7
47.5°	45.3
50°	31.0
52.5°	21.2
55°	17.4
57.5°	15.1
60°	12.8
62.5°	11.3
65°	9.8
67.5°	8.3
70°	6.8
72.5°	6.0
75°	4.5
77.5°	3.8
80°	3.0
82.5°	2.3
85°	1.5
87.5°	0.8
90°	0.0

(END OF REPORT)