

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286030

Luminaire Tested: P3AS02R209030D2WDE010 E3D1H

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1286030  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R209030D2WDE010 E3D1H  
Description: 3in Adjustable Dim to Warm LED luminaire with, R20 optic, 3000K CCT AND, 90CRI , E3D1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 408.1 lumens  
Efficiency: N/A  
Efficacy: 56.7 lumens/watt  
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1286030  
CATALOG NUMBER: P3AS02R209030D2WDE010 E3D1H

### Luminous Intensity Polar Plot

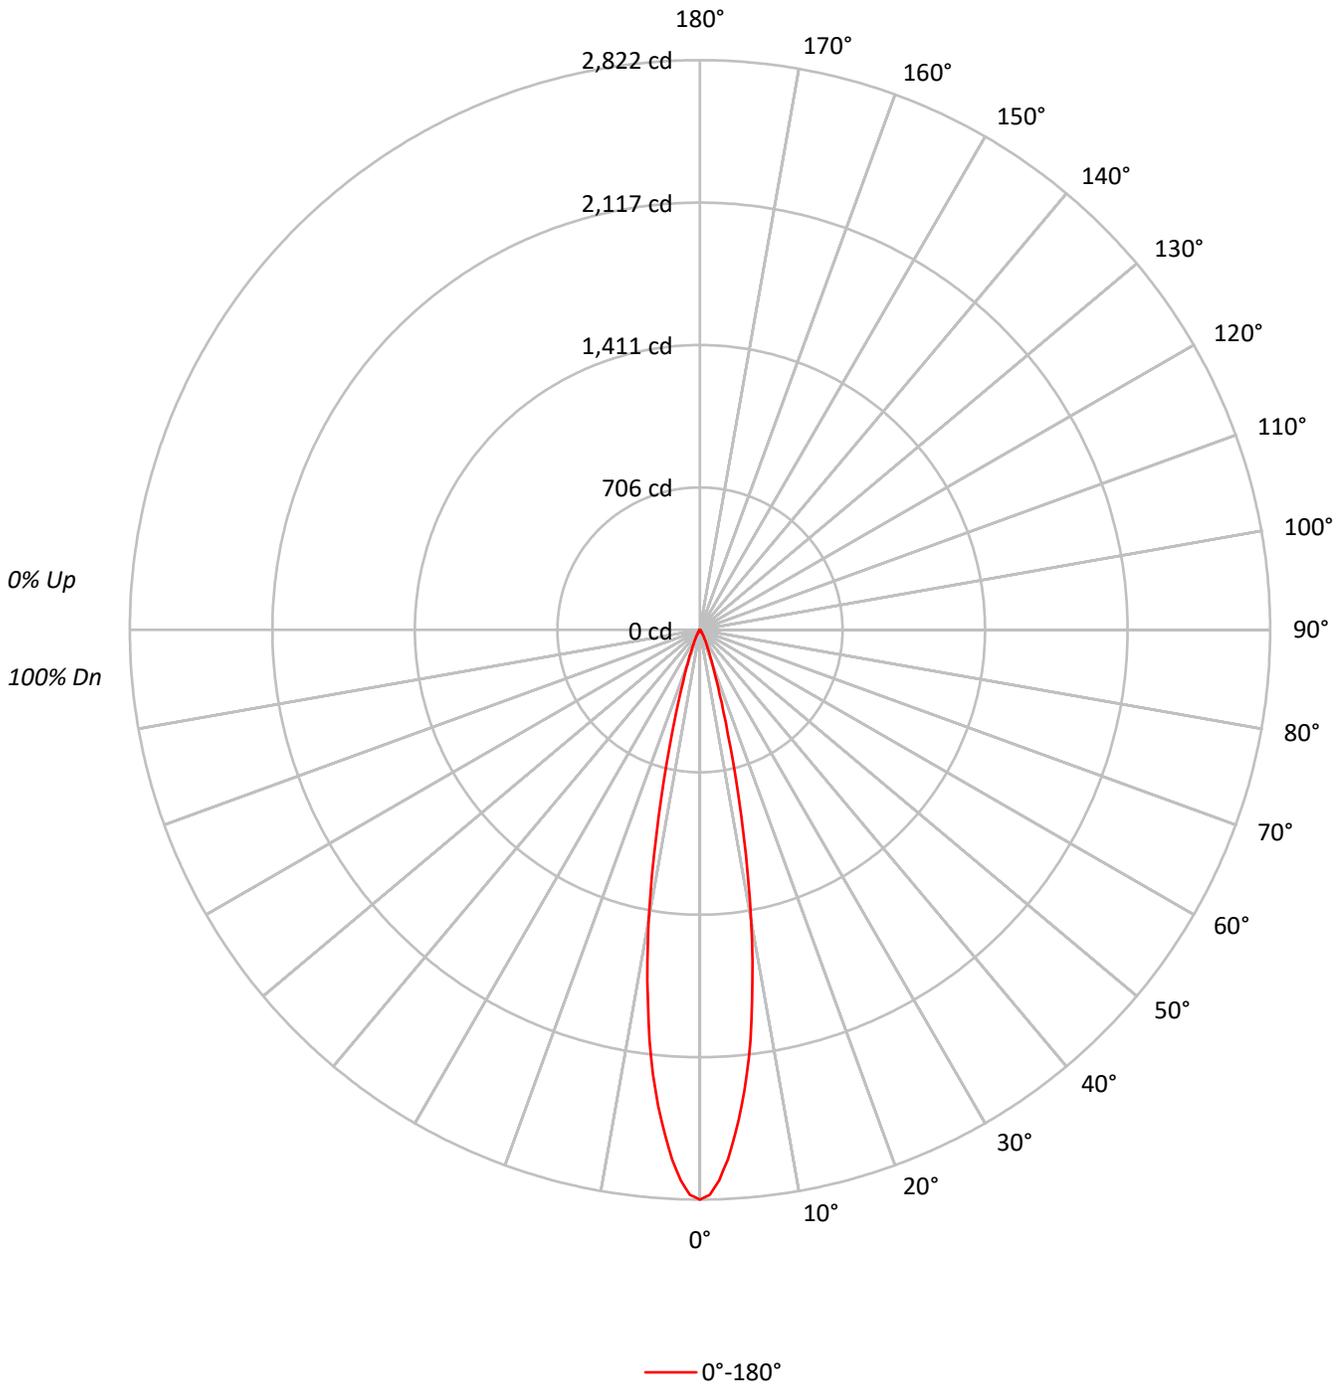



TEST NUMBER: P1286030  
 CATALOG NUMBER: P3AS02R209030D2WDE010 E3D1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	100
1	115	114	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	97	97
2	112	109	106	104	110	107	105	103	104	102	101	101	100	98	99	98	96	95	95	95	95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	93	93	93
4	106	101	98	95	105	100	97	95	99	96	94	97	94	93	95	93	92	91	91	91	91
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	90	89	89	89	89
6	101	96	92	89	100	95	92	89	94	91	89	93	90	88	92	89	88	87	87	87	87
7	99	93	90	87	98	93	89	87	92	89	86	91	88	86	90	87	86	85	85	85	85
8	97	91	87	85	96	91	87	85	90	87	85	89	86	84	88	86	84	83	83	83	83
9	95	89	85	83	94	89	85	83	88	85	83	87	84	82	87	84	82	81	81	81	81
10	93	87	84	81	92	87	83	81	86	83	81	86	83	81	85	83	81	80	80	80	80

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	618898
5°	521086
10°	325467
15°	121681
20°	41770
25°	17396
30°	8204
35°	3667
40°	1746
45°	899
50°	341
55°	76
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 899 cd/sqm



TEST NUMBER: P1286030  
 CATALOG NUMBER: P3AS02R209030D2WDE010 E3D1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	196.9	48.2
10°-20°	162.2	39.7
20°-30°	36.8	9.0
30°-40°	9.4	2.3
40°-50°	2.4	0.6
50°-60°	0.3	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	395.9	97.0
0°-40°	405.2	99.3
0°-60°	407.9	100.0
0°-90°	408.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	408.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2822	
5°	2367	197
15°	536	162
25°	72	37
35°	14	9
45°	3	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1286030  
CATALOG NUMBER: P3AS02R209030D2WDE010 E3D1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2822.4
1°	2798.5
2°	2728.0
3°	2626.8
4°	2502.7
5°	2367.3
6°	2216.4
7°	2049.9
8°	1855.6
9°	1663.0
10°	1461.7
11°	1247.5
12°	1033.5
13°	852.3
14°	679.1
15°	536.0
16°	423.1
17°	333.7
18°	268.2
19°	218.1
20°	179.0
21°	149.6
22°	124.9
23°	103.8
24°	86.6
25°	71.9
27.5°	47.1
30°	32.4
32.5°	19.9
35°	13.7
37.5°	8.8
40°	6.1
42.5°	4.1
45°	2.9
47.5°	1.9
50°	1.0
52.5°	0.5
55°	0.2
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1286030  
CATALOG NUMBER: P3AS02R209030D2WDE010 E3D1H

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)