

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286164

Luminaire Tested: P3AS02R409030D2WDE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286164
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R409030D2WDE010 E3DLD1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 291.0 lumens
Efficiency: N/A
Efficacy: 40.4 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286164

CATALOG NUMBER: P3AS02R409030D2WDE010 E3DLD1WMH

Luminous Intensity Polar Plot

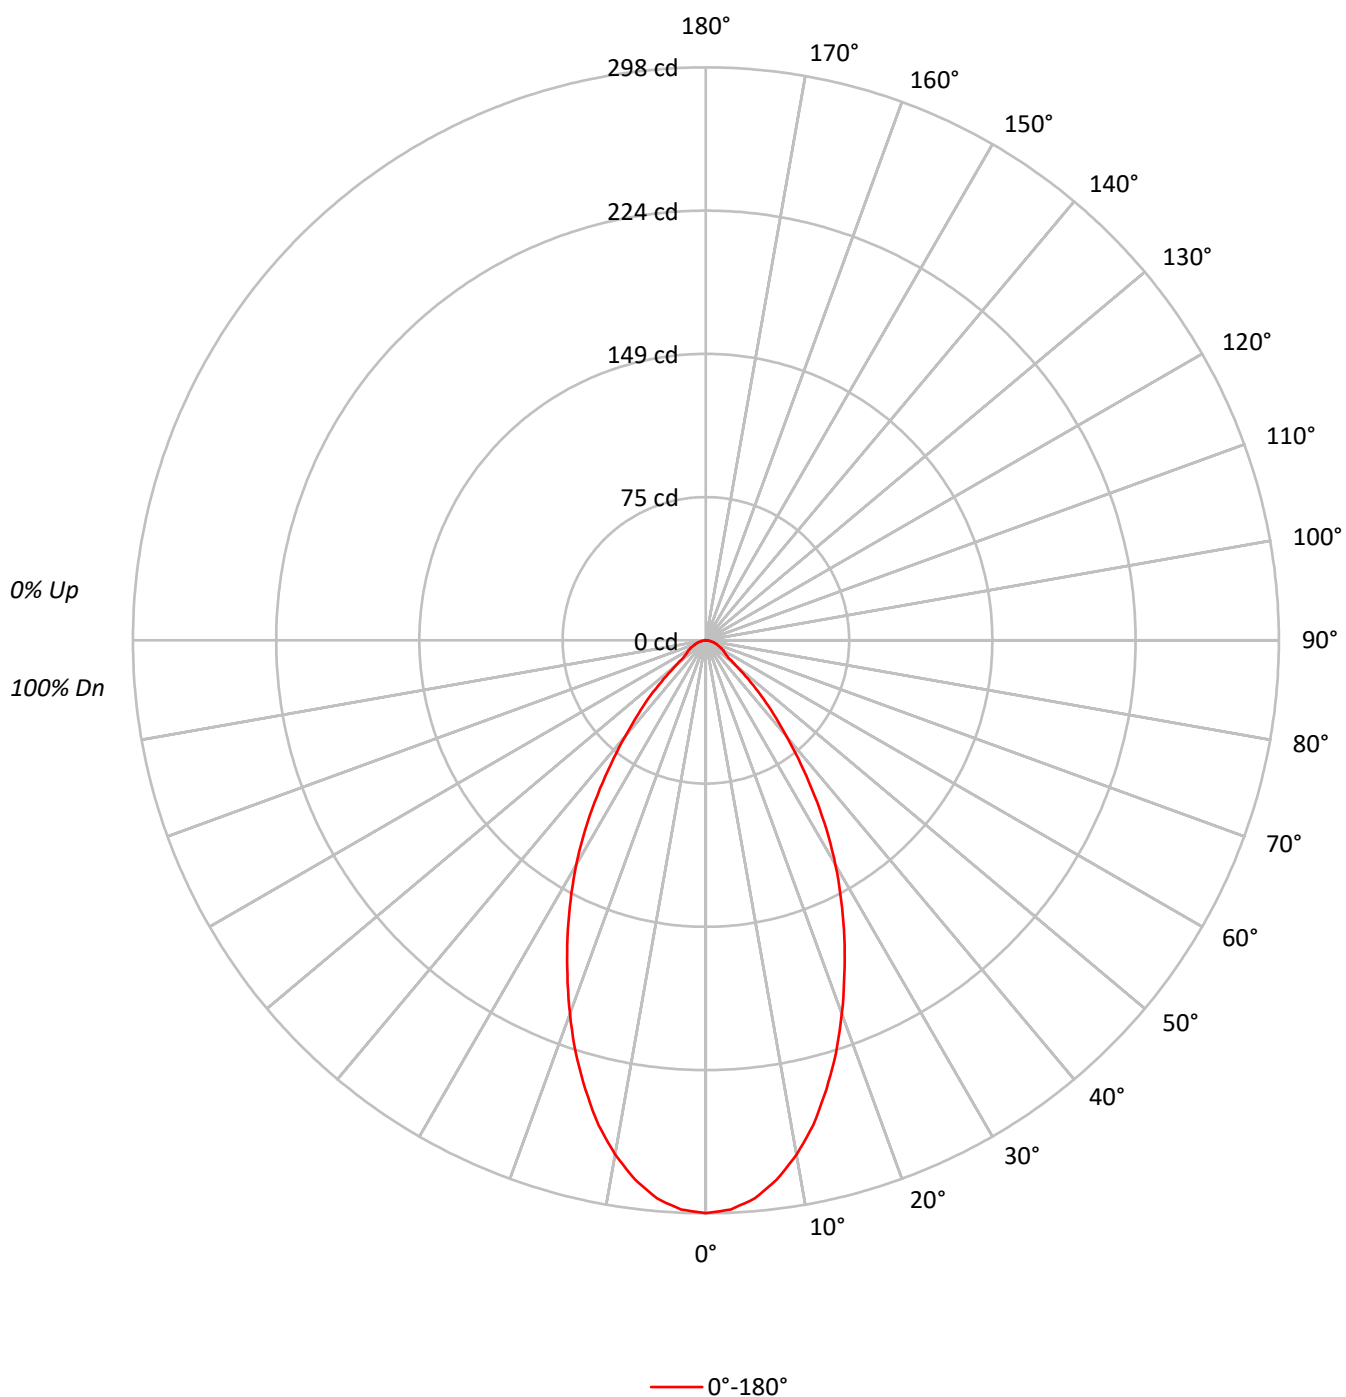

TEST NUMBER: P1286164

CATALOG NUMBER: P3AS02R409030D2WDE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	65324
5°	64142
10°	60453
15°	54915
20°	48234
25°	41204
30°	34132
35°	26314
40°	18721
45°	12621
50°	6891
55°	4855
60°	4561
65°	4203
70°	3783
75°	3558
80°	2904
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12621 cd/sqm

TEST NUMBER: P1286164

CATALOG NUMBER: P3AS02R409030D2WDE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	27.2	9.3
10°-20°	67.4	23.2
20°-30°	77.9	26.8
30°-40°	61.4	21.1
40°-50°	31.5	10.8
50°-60°	12.1	4.1
60°-70°	7.9	2.7
70°-80°	4.4	1.5
80°-90°	1.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	172.5	59.3
0°-40°	233.9	80.4
0°-60°	277.4	95.3
0°-90°	291.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	291.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	298	
5°	291	27
15°	242	67
25°	170	78
35°	98	61
45°	41	32
55°	13	12
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1286164

CATALOG NUMBER: P3AS02R409030D2WDE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	297.9
2.5°	296.3
5°	291.4
7.5°	282.9
10°	271.5
12.5°	258.2
15°	241.9
17.5°	225.0
20°	206.7
22.5°	188.2
25°	170.3
27.5°	152.4
30°	134.8
32.5°	116.9
35°	98.3
37.5°	81.1
40°	65.4
42.5°	52.1
45°	40.7
47.5°	29.6
50°	20.2
52.5°	14.7
55°	12.7
57.5°	11.4
60°	10.4
62.5°	9.1
65°	8.1
67.5°	6.8
70°	5.9
72.5°	4.9
75°	4.2
77.5°	3.3
80°	2.3
82.5°	2.0
85°	1.0
87.5°	0.7
90°	0.0

(END OF REPORT)