

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286228

Luminaire Tested: P3AS02R559030D2WDE010 E3CD1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286228
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R559030D2WDE010 E3CD1MB
Description: 3in Adjustable Dim to Warm LED luminaire with, R55 optic, 3000K CCT AND, 90CRI , E3CD1MI
TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 433.1 lumens
Efficiency: N/A
Efficacy: 60.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286228

CATALOG NUMBER: P3AS02R559030D2WDE010 E3CD1MB

Luminous Intensity Polar Plot

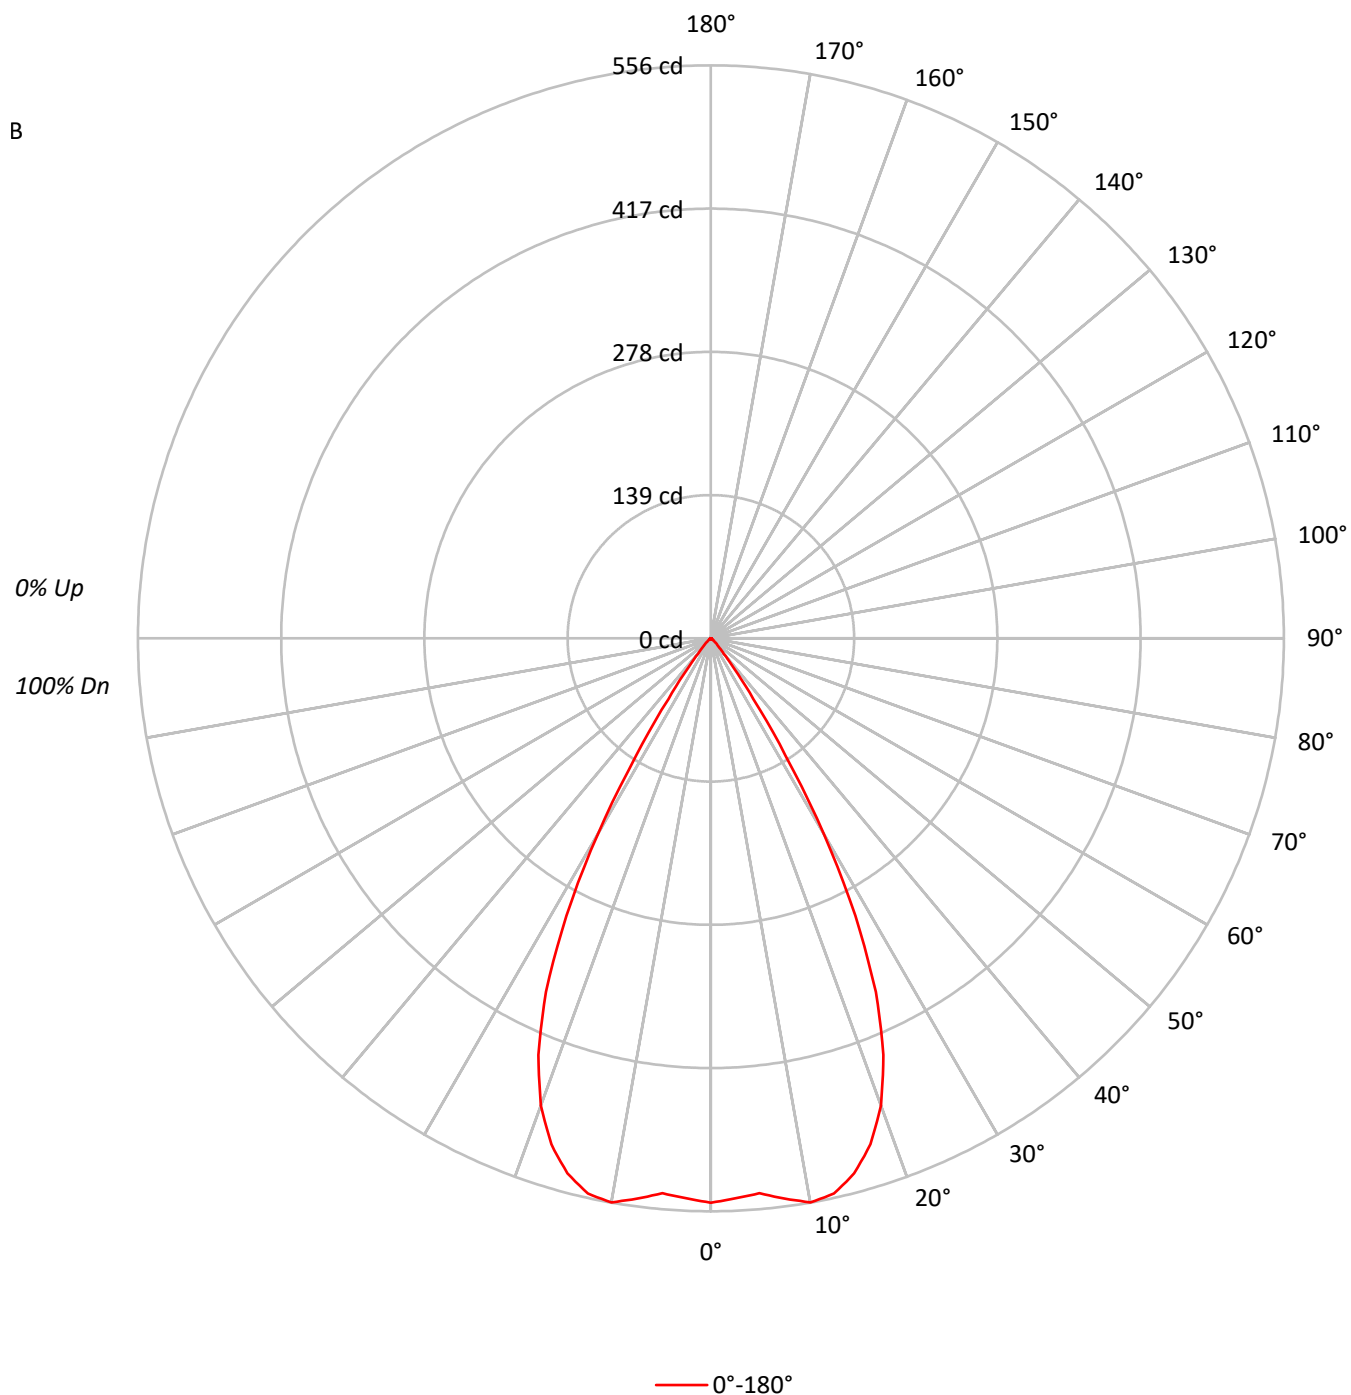

TEST NUMBER: P1286228

CATALOG NUMBER: P3AS02R559030D2WDE010 E3CD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		101	100	99		98	97	96	94
2	109	104	101	98	107	103	99	96	100	97	94		97	94	92		94	92	90	89
3	104	98	94	90	102	97	93	89	94	91	88		92	89	86		90	87	85	84
4	99	92	87	84	98	91	87	83	89	85	82		87	84	81		85	83	80	79
5	95	87	82	78	93	86	81	78	85	80	77		83	79	76		82	78	76	74
6	91	83	77	73	89	82	77	73	80	76	72		79	75	72		78	74	72	70
7	87	78	73	69	85	78	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	61	78	70	65	61	69	64	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	120100
5°	118974
10°	123756
15°	122044
20°	112546
25°	91578
30°	55629
35°	19247
40°	5496
45°	2636
50°	1126
55°	497
60°	570
65°	519
70°	449
75°	593
80°	379
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2636 cd/sqm

TEST NUMBER: P1286228

CATALOG NUMBER: P3AS02R559030D2WDE010 E3CD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.3	12.1
10°-20°	149.4	34.5
20°-30°	166.6	38.5
30°-40°	54.5	12.6
40°-50°	7.2	1.7
50°-60°	1.5	0.4
60°-70°	0.9	0.2
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	368.2	85.0
0°-40°	422.7	97.6
0°-60°	431.5	99.6
0°-90°	433.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	433.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	548	
5°	540	52
15°	538	149
25°	378	167
35°	72	54
45°	8	7
55°	1	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1286228

CATALOG NUMBER: P3AS02R559030D2WDE010 E3CD1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	547.7
2.5°	543.8
5°	540.5
7.5°	548.3
10°	555.8
12.5°	551.9
15°	537.6
17.5°	514.8
20°	482.3
22.5°	437.4
25°	378.5
27.5°	303.6
30°	219.7
32.5°	134.7
35°	71.9
37.5°	36.4
40°	19.2
42.5°	12.4
45°	8.5
47.5°	5.9
50°	3.3
52.5°	2.0
55°	1.3
57.5°	1.3
60°	1.3
62.5°	1.0
65°	1.0
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.3
80°	0.3
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)