

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286270

Luminaire Tested: P3AS02R609030D2WDE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286270
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R609030D2WDE010 E3DL1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R60 optic, 3000K CCT AND, 90CRI ,
E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 342.1 lumens
Efficiency: N/A
Efficacy: 47.5 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286270

CATALOG NUMBER: P3AS02R609030D2WDE010 E3DL1WMH

Luminous Intensity Polar Plot

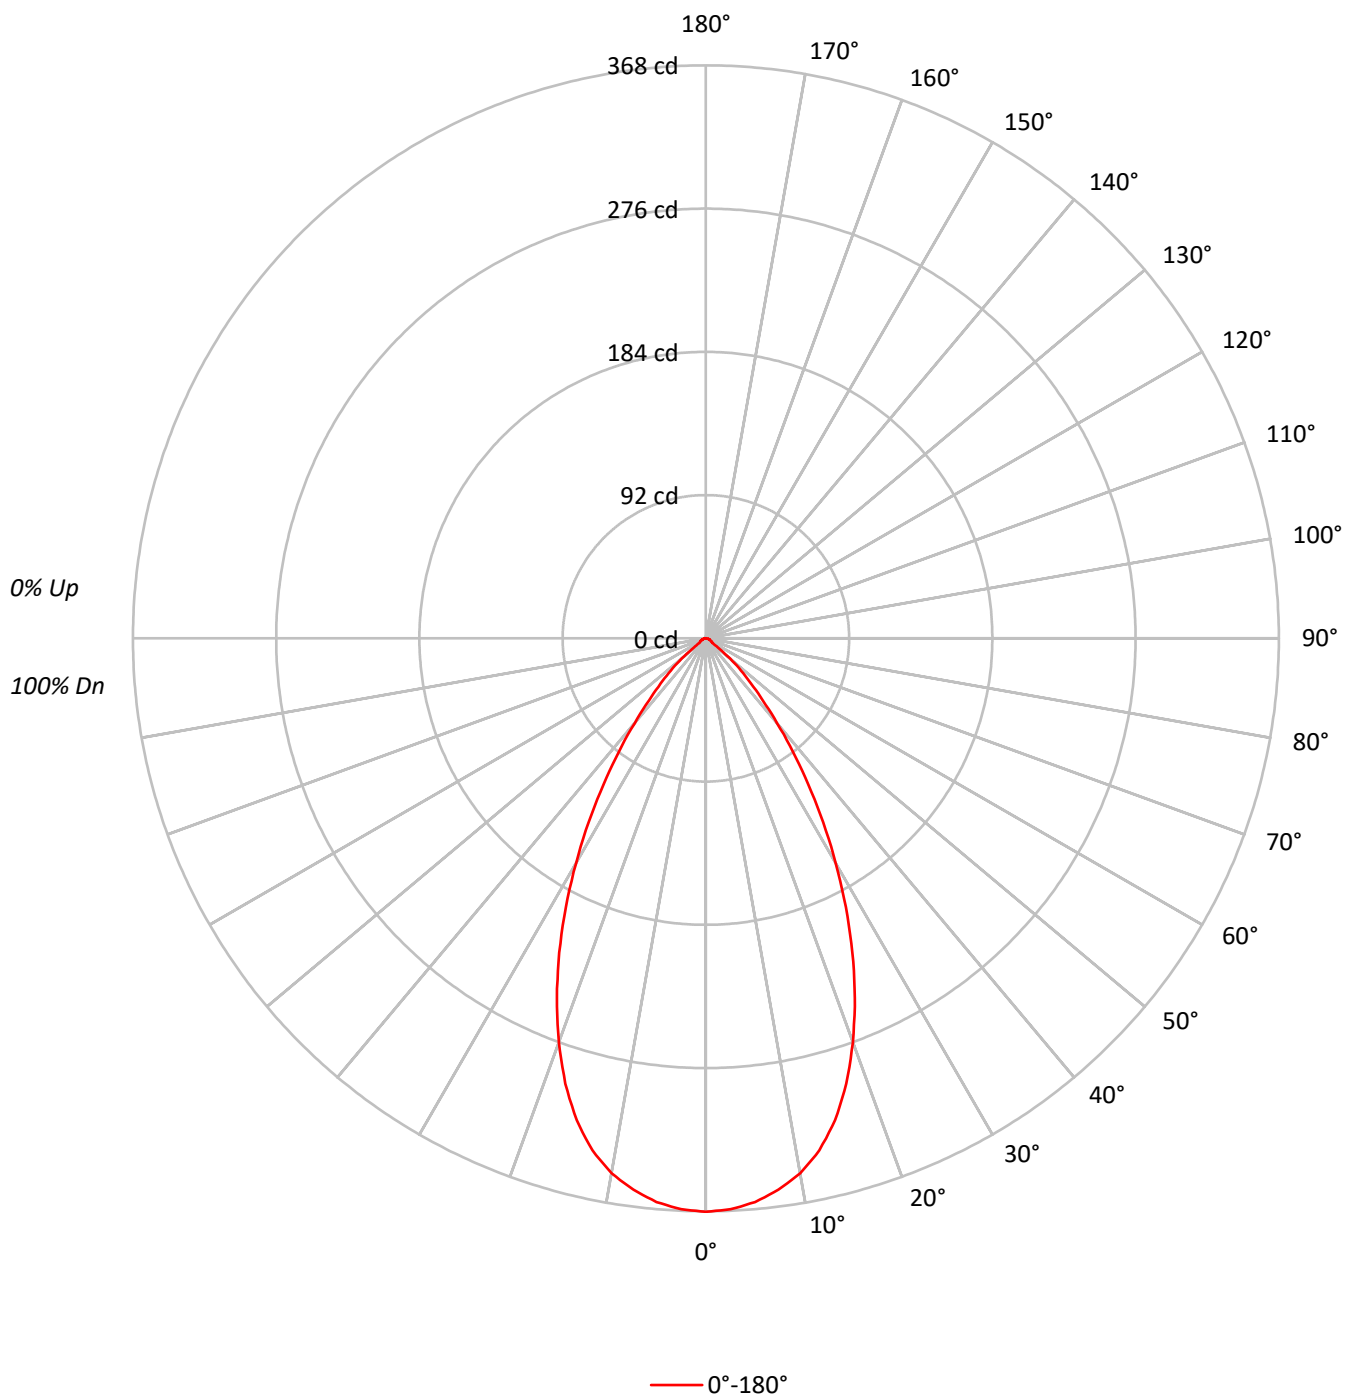

TEST NUMBER: P1286270

CATALOG NUMBER: P3AS02R609030D2WDE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	84	91	86	83		88	85	82		86
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81
5	91	82	76	71	89	81	75	71	79	74	70		78	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		67
8	77	67	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	60	54	50	59	53	50		58	53	50		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80761
5°	79991
10°	77665
15°	72759
20°	64406
25°	53882
30°	42234
35°	30624
40°	20381
45°	12714
50°	6891
55°	1988
60°	1842
65°	1712
70°	1667
75°	1694
80°	1642
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12714 cd/sqm

TEST NUMBER: P1286270

CATALOG NUMBER: P3AS02R609030D2WDE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.2	10.0
10°-20°	88.9	26.0
20°-30°	101.4	29.6
30°-40°	71.9	21.0
40°-50°	32.6	9.5
50°-60°	6.9	2.0
60°-70°	3.3	1.0
70°-80°	2.1	0.6
80°-90°	0.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	224.5	65.6
0°-40°	296.4	86.6
0°-60°	336.0	98.2
0°-90°	342.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	342.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	368	
5°	363	34
15°	320	89
25°	223	101
35°	114	72
45°	41	33
55°	5	7
65°	3	3
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1286270

CATALOG NUMBER: P3AS02R609030D2WDE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	368.3
2.5°	367.0
5°	363.4
7.5°	357.2
10°	348.8
12.5°	336.8
15°	320.5
17.5°	300.0
20°	276.0
22.5°	250.0
25°	222.7
27.5°	194.7
30°	166.8
32.5°	140.1
35°	114.4
37.5°	91.7
40°	71.2
42.5°	54.0
45°	41.0
47.5°	30.6
50°	20.2
52.5°	9.4
55°	5.2
57.5°	4.6
60°	4.2
62.5°	3.9
65°	3.3
67.5°	2.9
70°	2.6
72.5°	2.3
75°	2.0
77.5°	1.6
80°	1.3
82.5°	1.0
85°	0.7
87.5°	0.3
90°	0.0

(END OF REPORT)