

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286313

Luminaire Tested: P3AS02R709030D2WDE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286313
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R709030D2WDE010 E3CB1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R70 optic, 3000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 407.0 lumens
Efficiency: N/A
Efficacy: 56.5 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286313

CATALOG NUMBER: P3AS02R709030D2WDE010 E3CB1MMS

Luminous Intensity Polar Plot

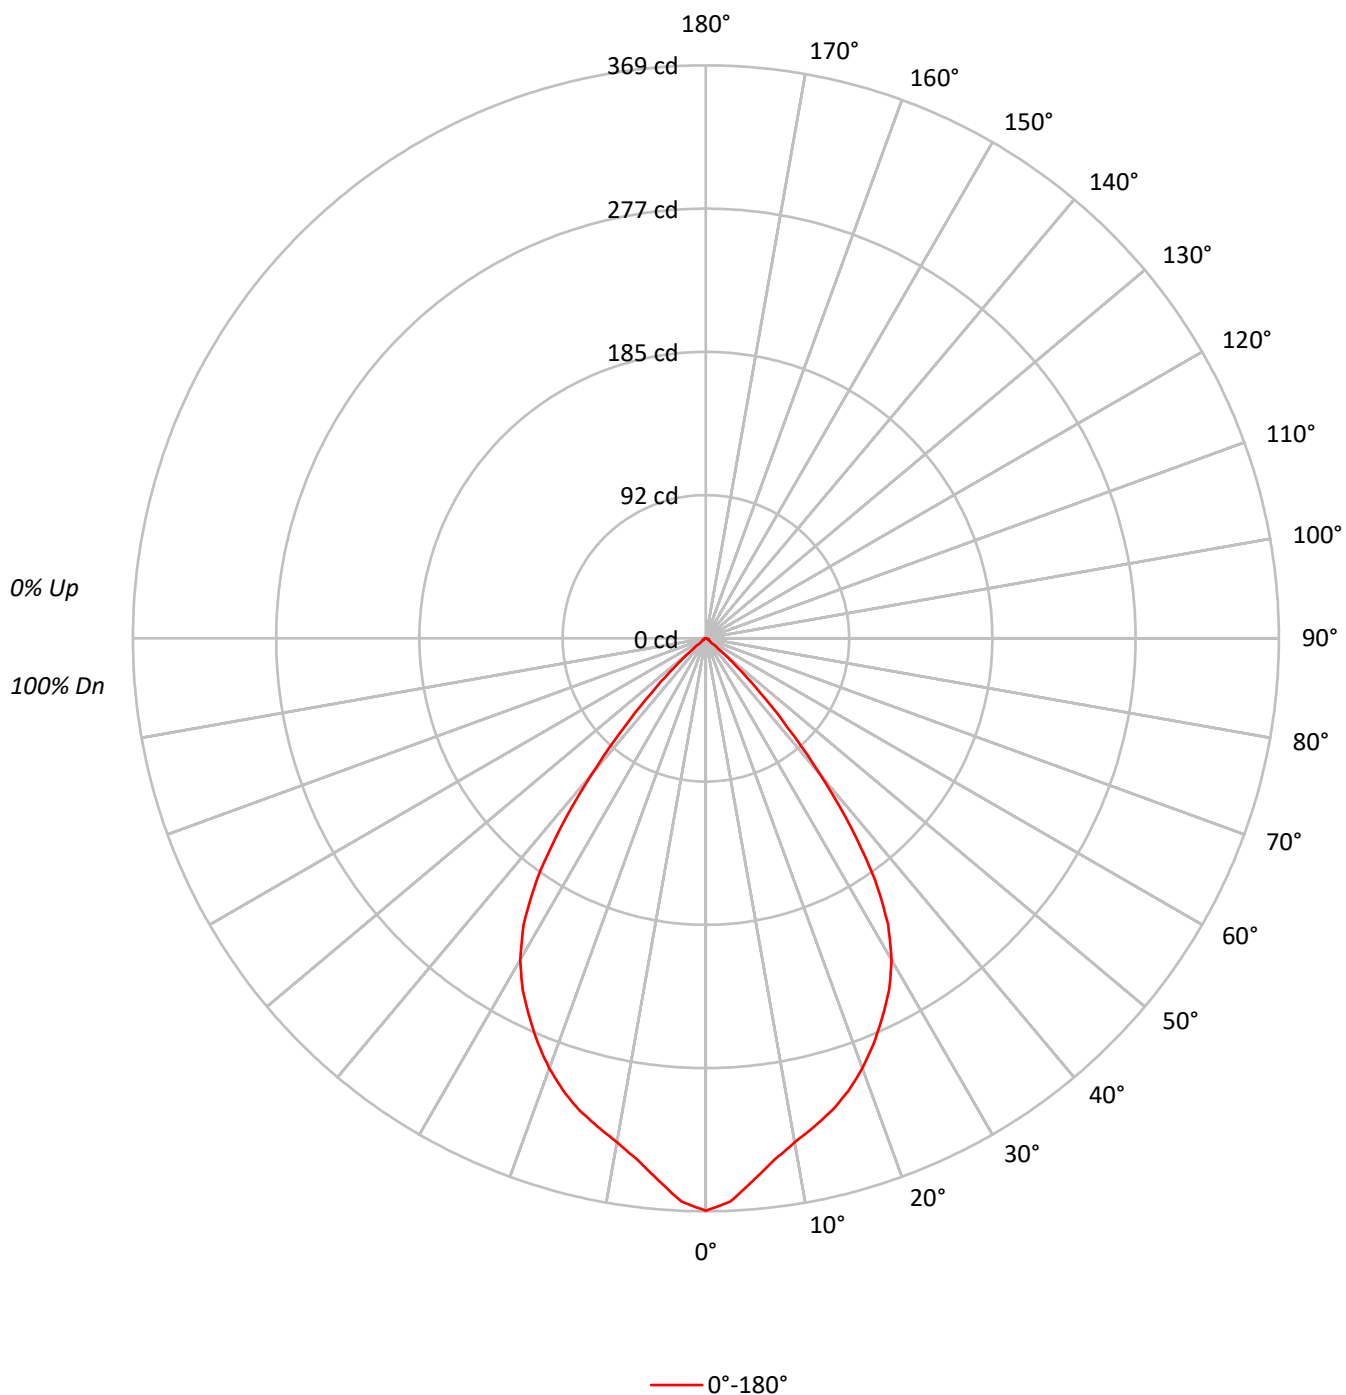

TEST NUMBER: P1286313

CATALOG NUMBER: P3AS02R709030D2WDE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	95	87	81	77	94	86	81	76	84	79	75		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	76	66	59	55	75	65	59	55	64	58	55		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	50		58
10	68	58	52	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80827
5°	77107
10°	73368
15°	71419
20°	68769
25°	65084
30°	60541
35°	50862
40°	32776
45°	15226
50°	3991
55°	994
60°	1009
65°	830
70°	833
75°	847
80°	884
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15226 cd/sqm

TEST NUMBER: P1286313

CATALOG NUMBER: P3AS02R709030D2WDE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	32.8	8.1
10°-20°	88.4	21.7
20°-30°	123.5	30.3
30°-40°	114.5	28.1
40°-50°	41.0	10.1
50°-60°	3.5	0.9
60°-70°	1.7	0.4
70°-80°	1.1	0.3
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	244.7	60.1
0°-40°	359.2	88.2
0°-60°	403.7	99.2
0°-90°	407.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	407.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	369	
5°	350	33
15°	315	88
25°	269	124
35°	190	115
45°	49	41
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1286313

CATALOG NUMBER: P3AS02R709030D2WDE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	368.6
2.5°	363.0
5°	350.3
7.5°	338.6
10°	329.5
12.5°	322.0
15°	314.6
17.5°	305.5
20°	294.7
22.5°	282.4
25°	269.0
27.5°	255.4
30°	239.1
32.5°	218.3
35°	190.0
37.5°	153.9
40°	114.5
42.5°	78.1
45°	49.1
47.5°	27.3
50°	11.7
52.5°	3.9
55°	2.6
57.5°	2.3
60°	2.3
62.5°	2.0
65°	1.6
67.5°	1.6
70°	1.3
72.5°	1.3
75°	1.0
77.5°	1.0
80°	0.7
82.5°	0.7
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)