

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286347

Luminaire Tested: P3AS05R159030D2WDE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286347
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R159030D2WDE010 E3D1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R15 optic, 3000K CCT AND, 90CRI , E3D1WM TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 644.9 lumens
Efficiency: N/A
Efficacy: 58.1 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286347

CATALOG NUMBER: P3AS05R159030D2WDE010 E3D1WMH

Luminous Intensity Polar Plot

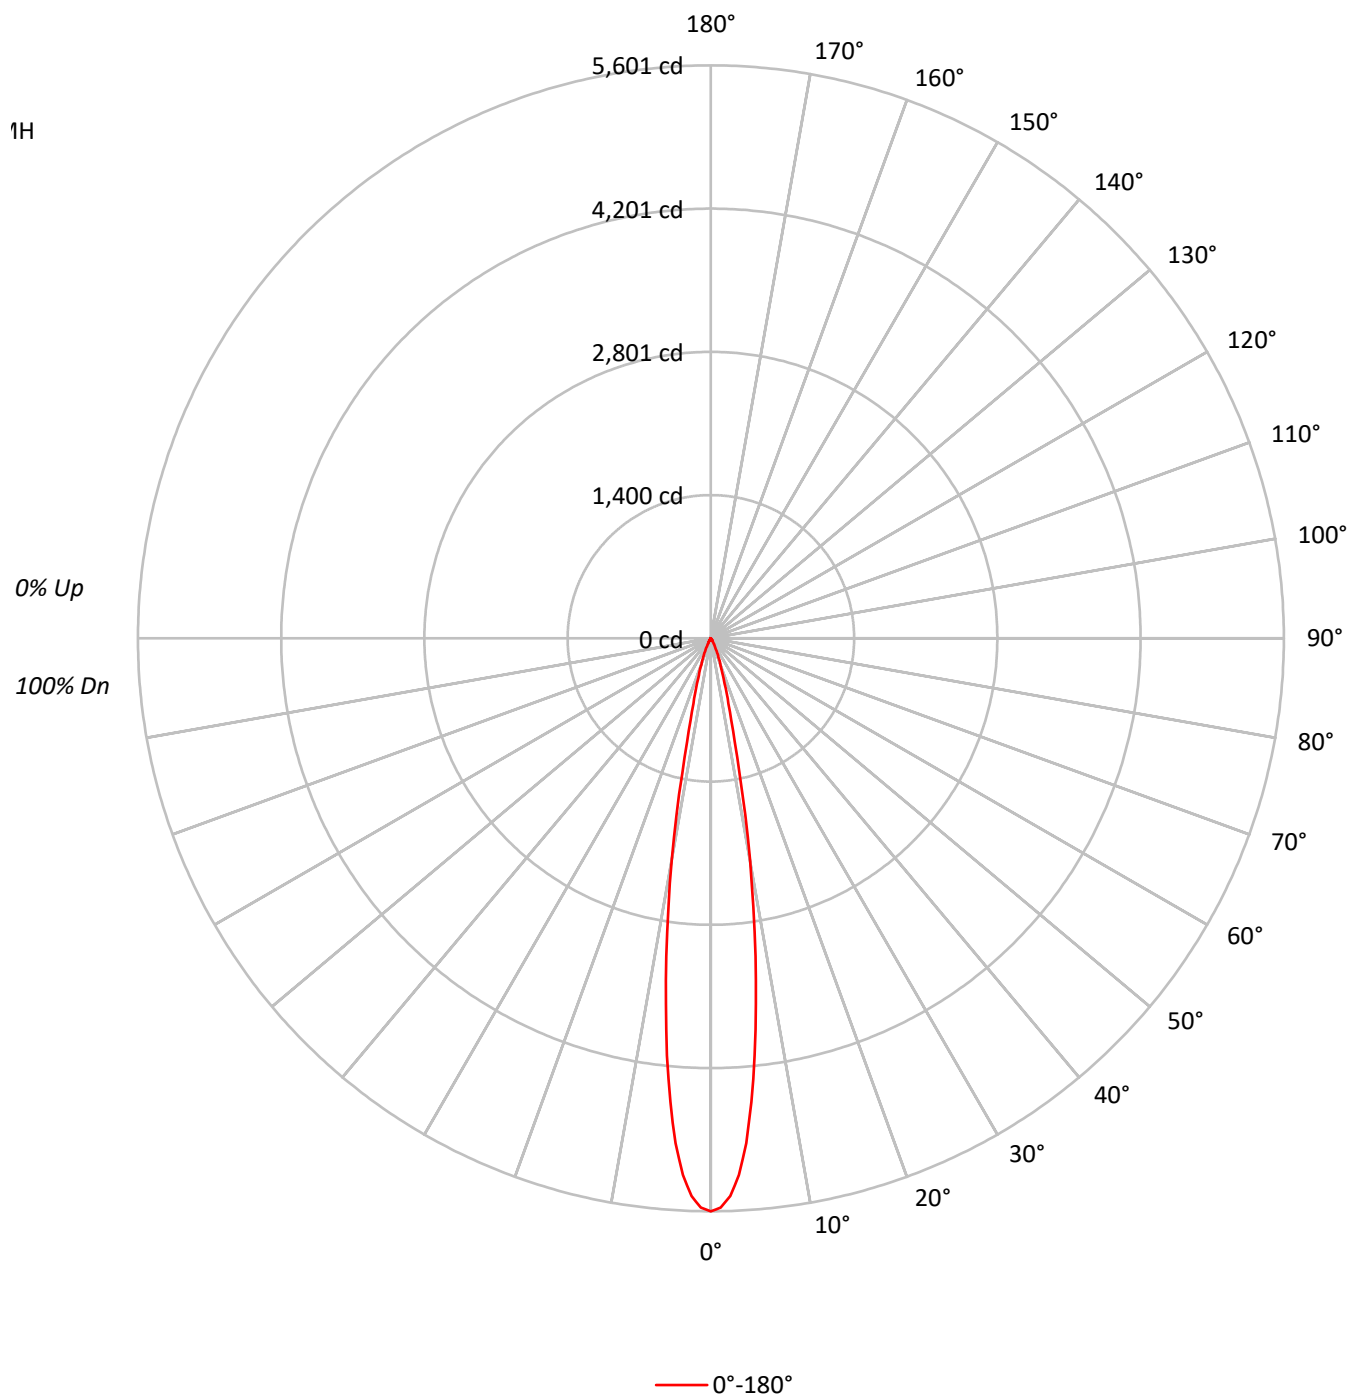

TEST NUMBER: P1286347

CATALOG NUMBER: P3AS05R159030D2WDE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	116	114	112	111	113	112	110	109	108	107	105		104	103	102		101
2	112	109	107	105	110	108	105	103	105	103	101		102	100	99		99
3	110	106	102	100	108	104	102	99	102	100	98		100	98	96		98
4	107	102	99	96	106	101	98	96	99	97	95		98	96	94		96
5	105	100	96	94	103	99	96	93	97	94	92		96	93	92		94
6	102	97	94	91	101	96	93	91	95	92	90		94	92	90		93
7	100	95	91	89	99	94	91	89	93	90	88		92	90	88		91
8	98	93	89	87	97	92	89	87	91	89	87		91	88	86		90
9	96	91	88	85	96	91	87	85	90	87	85		89	87	85		89
10	95	89	86	84	94	89	86	84	88	85	83		88	85	83		87

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1228257
5°	1001560
10°	490505
15°	150126
20°	63589
25°	28768
30°	11217
35°	5166
40°	1603
45°	620
50°	239
55°	76
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 620 cd/sqm

TEST NUMBER: P1286347

CATALOG NUMBER: P3AS05R159030D2WDE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	354.2	54.9
10°-20°	217.3	33.7
20°-30°	58.4	9.1
30°-40°	12.9	2.0
40°-50°	1.8	0.3
50°-60°	0.3	0.0
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	629.9	97.7
0°-40°	642.7	99.7
0°-60°	644.8	100.0
0°-90°	644.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	644.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5601	
5°	4550	354
15°	661	217
25°	119	58
35°	19	13
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1286347

CATALOG NUMBER: P3AS05R159030D2WDE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	5601.3
1°	5566.3
2°	5454.0
3°	5251.8
4°	4947.3
5°	4550.1
6°	4100.8
7°	3600.4
8°	3140.6
9°	2653.1
10°	2202.9
11°	1757.3
12°	1352.0
13°	1039.9
14°	823.2
15°	661.3
17.5°	409.9
20°	272.5
22.5°	183.4
25°	118.9
27.5°	70.4
30°	44.3
32.5°	29.8
35°	19.3
37.5°	10.8
40°	5.6
42.5°	3.2
45°	2.0
47.5°	1.2
50°	0.7
52.5°	0.5
55°	0.2
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1286347

CATALOG NUMBER: P3AS05R159030D2WDE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)