

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286353

Luminaire Tested: P3AS05R159030D2WDE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286353
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R159030D2WDE010 E3DL1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R15 optic, 3000K CCT AND, 90CRI ,
E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 518.0 lumens
Efficiency: N/A
Efficacy: 46.7 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286353
CATALOG NUMBER: P3AS05R159030D2WDE010 E3DL1WMH

Luminous Intensity Polar Plot

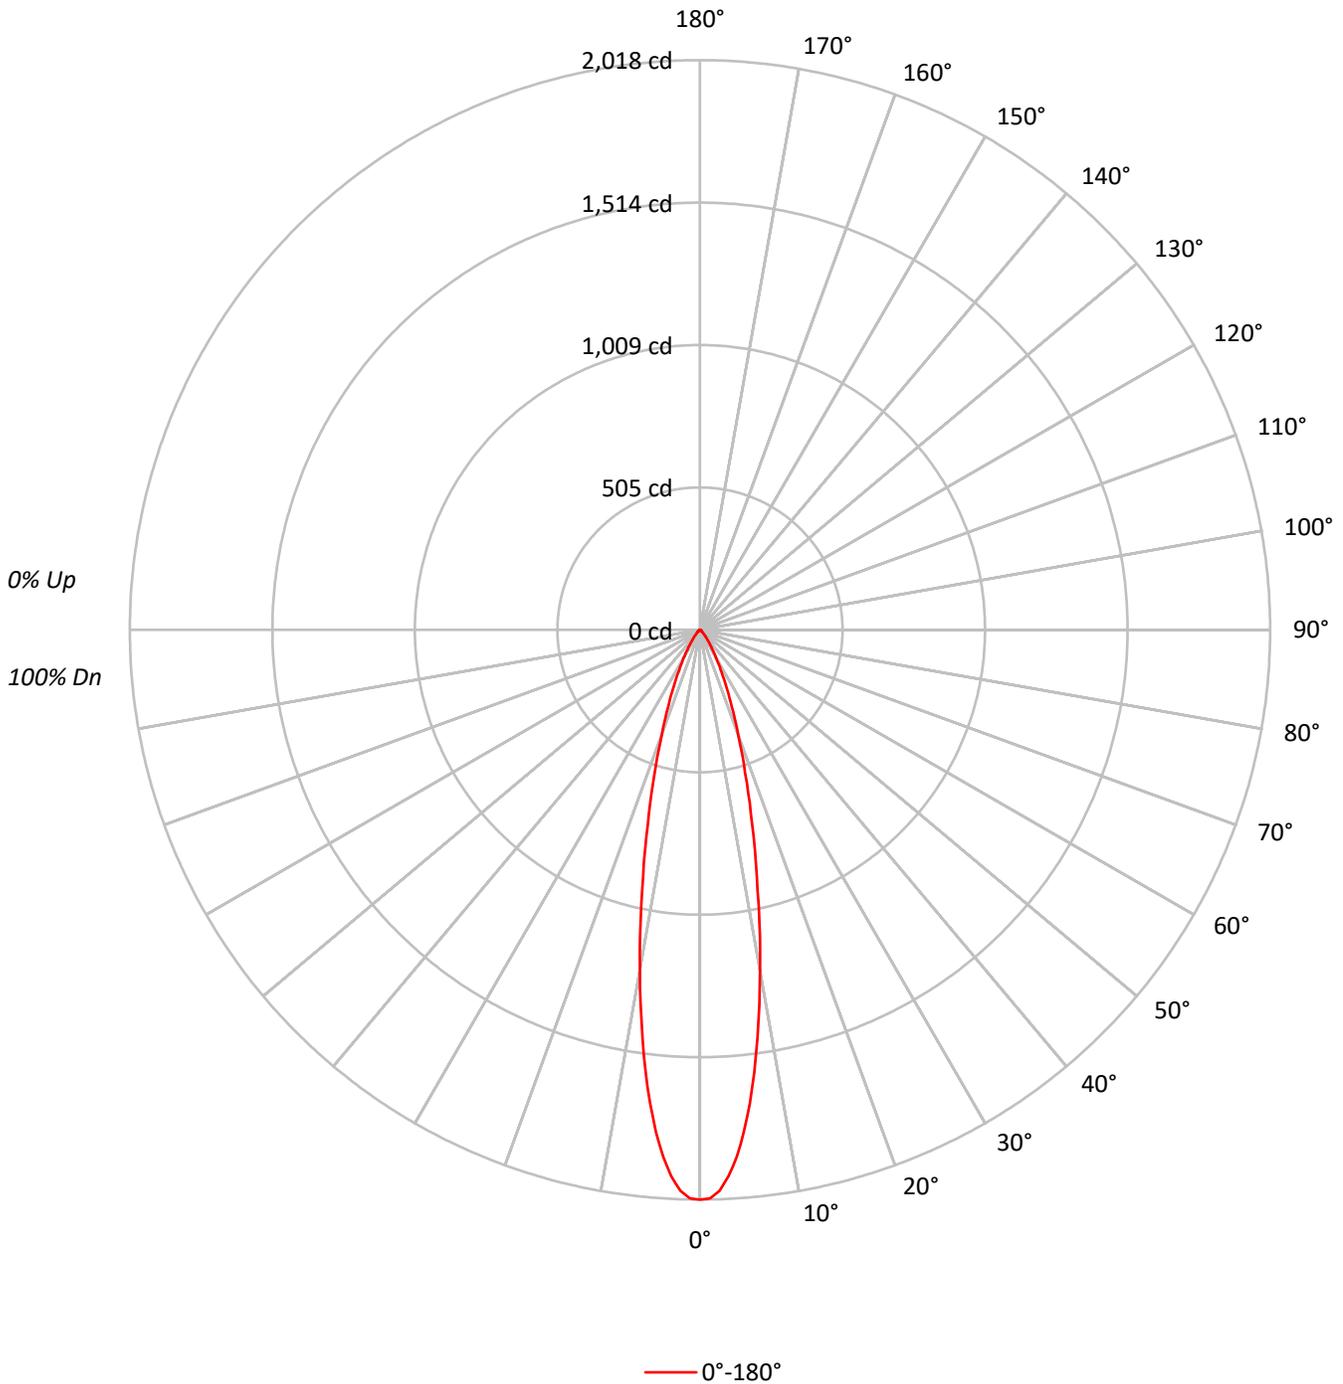



TEST NUMBER: P1286353

CATALOG NUMBER: P3AS05R159030D2WDE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	97	98	97	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	96	94	93	91
3	106	101	97	93	104	99	96	93	97	94	91	94	92	90	92	90	88	92	90	88	87
4	102	96	92	88	100	95	91	88	93	89	87	91	88	86	89	87	85	89	87	85	83
5	98	92	87	84	97	91	87	83	89	85	83	88	84	82	86	83	81	86	83	81	80
6	95	88	83	80	94	87	83	80	86	82	79	85	81	79	83	80	78	83	80	78	77
7	92	85	80	77	91	84	80	76	83	79	76	82	78	76	81	78	75	81	78	75	74
8	89	81	77	74	88	81	77	73	80	76	73	79	75	73	78	75	73	78	75	73	72
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	76	73	70	69
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	74	70	68	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	442508
5°	392801
10°	272785
15°	161318
20°	91871
25°	52527
30°	29068
35°	15499
40°	8559
45°	4652
50°	2900
55°	2294
60°	1974
65°	1816
70°	1603
75°	1694
80°	1263
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4652 cd/sqm



TEST NUMBER: P1286353

CATALOG NUMBER: P3AS05R159030D2WDE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.7	29.3
10°-20°	200.3	38.7
20°-30°	103.1	19.9
30°-40°	38.7	7.5
40°-50°	12.7	2.4
50°-60°	5.5	1.1
60°-70°	3.5	0.7
70°-80°	2.0	0.4
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	455.1	87.9
0°-40°	493.8	95.3
0°-60°	512.0	98.8
0°-90°	518.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	518.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2018	
5°	1784	152
15°	711	200
25°	217	103
35°	58	39
45°	15	13
55°	6	5
65°	4	3
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1286353
CATALOG NUMBER: P3AS05R159030D2WDE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2018.0
1°	2014.0
2°	1987.6
3°	1937.2
4°	1870.8
5°	1784.5
6°	1686.7
7°	1579.4
8°	1460.1
9°	1342.3
10°	1225.1
12.5°	942.6
15°	710.6
17.5°	531.9
20°	393.7
22.5°	293.9
25°	217.1
27.5°	158.2
30°	114.8
32.5°	81.3
35°	57.9
37.5°	41.4
40°	29.9
42.5°	21.5
45°	15.0
47.5°	11.0
50°	8.5
52.5°	7.0
55°	6.0
57.5°	5.0
60°	4.5
62.5°	4.0
65°	3.5
67.5°	3.0
70°	2.5
72.5°	2.5
75°	2.0
77.5°	1.5
80°	1.0
82.5°	1.0
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)