

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286380

Luminaire Tested: P3AS05R209030D2WDE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286380
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209030D2WDE010 E3DL1GPH
Description: 3in Adjustable Dim to Warm LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 253.0 lumens
Efficiency: N/A
Efficacy: 22.8 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286380
CATALOG NUMBER: P3AS05R209030D2WDE010 E3DL1GPH

Luminous Intensity Polar Plot

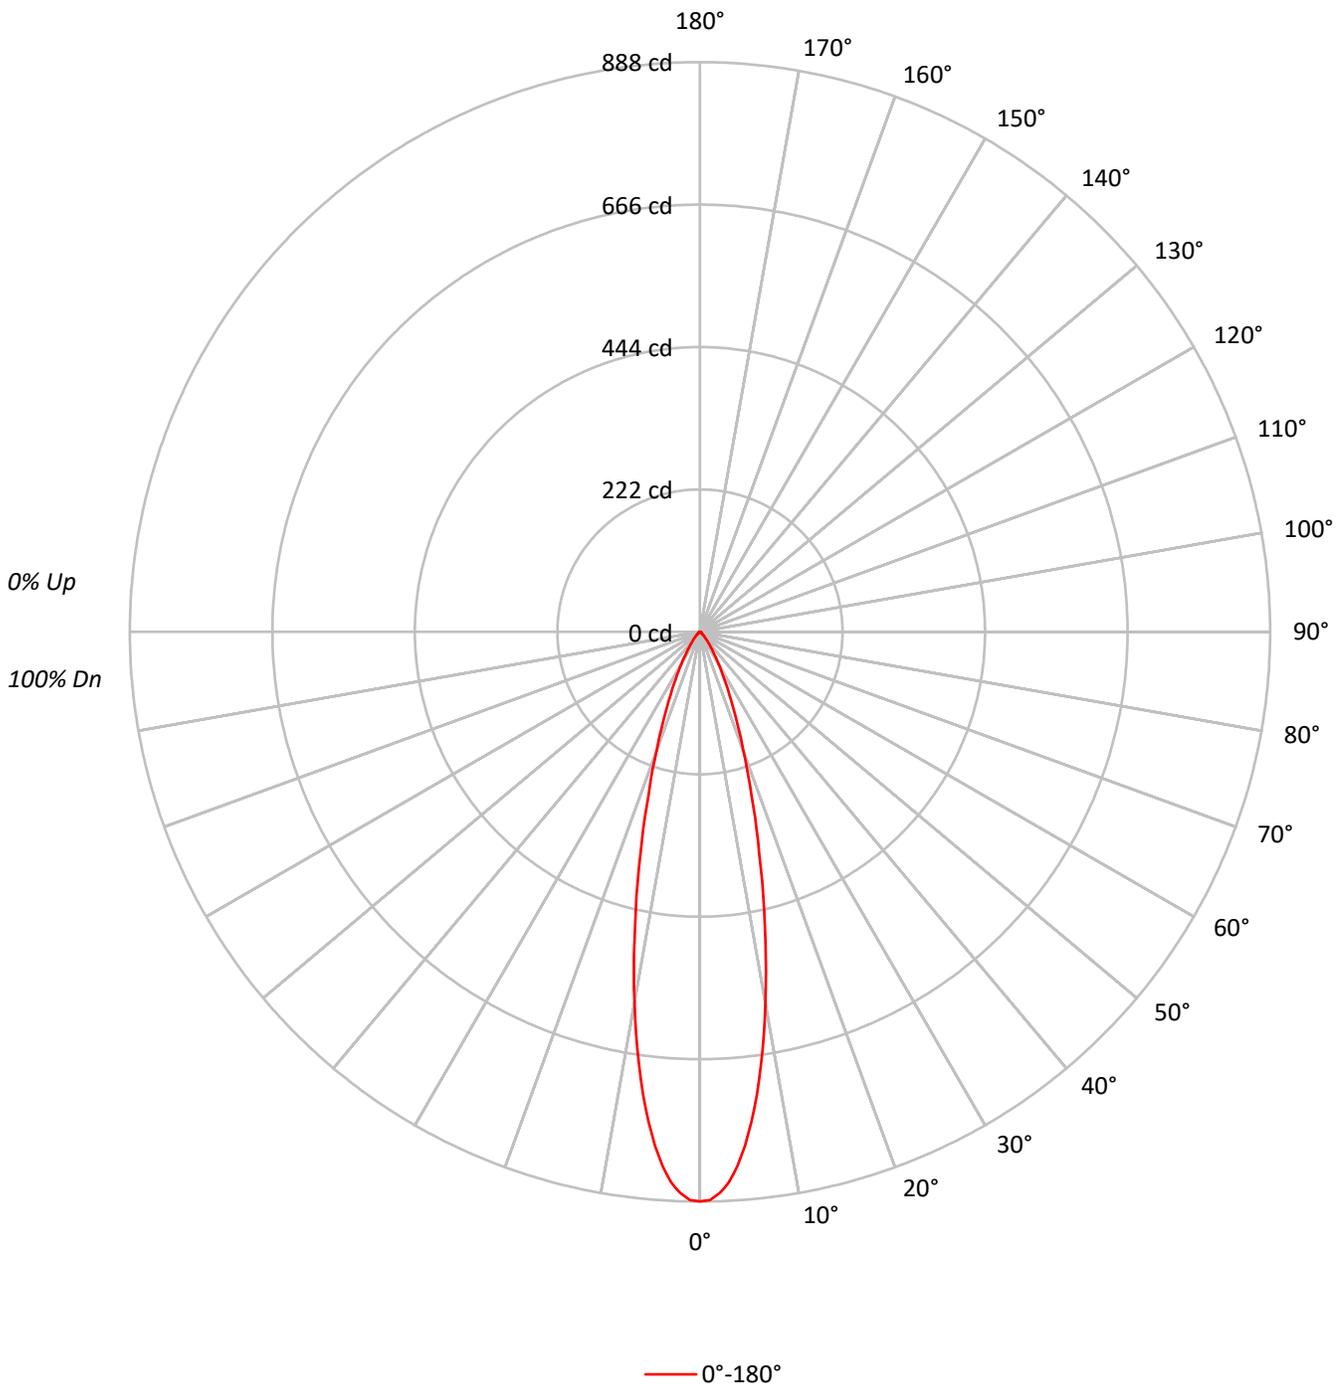



TEST NUMBER: P1286380
 CATALOG NUMBER: P3AS05R209030D2WDE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91		
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87		
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83		
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79		
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76		
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73		
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72	71		
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68		
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	194655
5°	176953
10°	130770
15°	80886
20°	46204
25°	26372
30°	14787
35°	8058
40°	4408
45°	2419
50°	1433
55°	1032
60°	965
65°	882
70°	769
75°	847
80°	631
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2419 cd/sqm



TEST NUMBER: P1286380

CATALOG NUMBER: P3AS05R209030D2WDE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.6	27.5
10°-20°	99.4	39.3
20°-30°	51.9	20.5
30°-40°	20.1	7.9
40°-50°	6.5	2.6
50°-60°	2.6	1.0
60°-70°	1.7	0.7
70°-80°	1.0	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	220.8	87.3
0°-40°	240.9	95.2
0°-60°	250.0	98.8
0°-90°	253.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	253.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	888	
5°	804	70
15°	356	99
25°	109	52
35°	30	20
45°	8	7
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1286380
CATALOG NUMBER: P3AS05R209030D2WDE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	887.7
1°	886.0
2°	875.5
3°	859.3
4°	834.4
5°	803.9
6°	767.7
7°	727.6
8°	681.2
9°	636.0
10°	587.3
12.5°	466.8
15°	356.3
17.5°	266.7
20°	198.0
22.5°	146.6
25°	109.0
27.5°	80.4
30°	58.4
32.5°	42.3
35°	30.1
37.5°	21.8
40°	15.4
42.5°	11.0
45°	7.8
47.5°	5.6
50°	4.2
52.5°	3.2
55°	2.7
57.5°	2.4
60°	2.2
62.5°	2.0
65°	1.7
67.5°	1.5
70°	1.2
72.5°	1.2
75°	1.0
77.5°	0.7
80°	0.5
82.5°	0.5
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)