

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286390

Luminaire Tested: P3AS05R209030D2WDE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286390
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209030D2WDE010 E3DLD1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 393.0 lumens
Efficiency: N/A
Efficacy: 35.4 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286390

CATALOG NUMBER: P3AS05R209030D2WDE010 E3DLD1WMH

Luminous Intensity Polar Plot

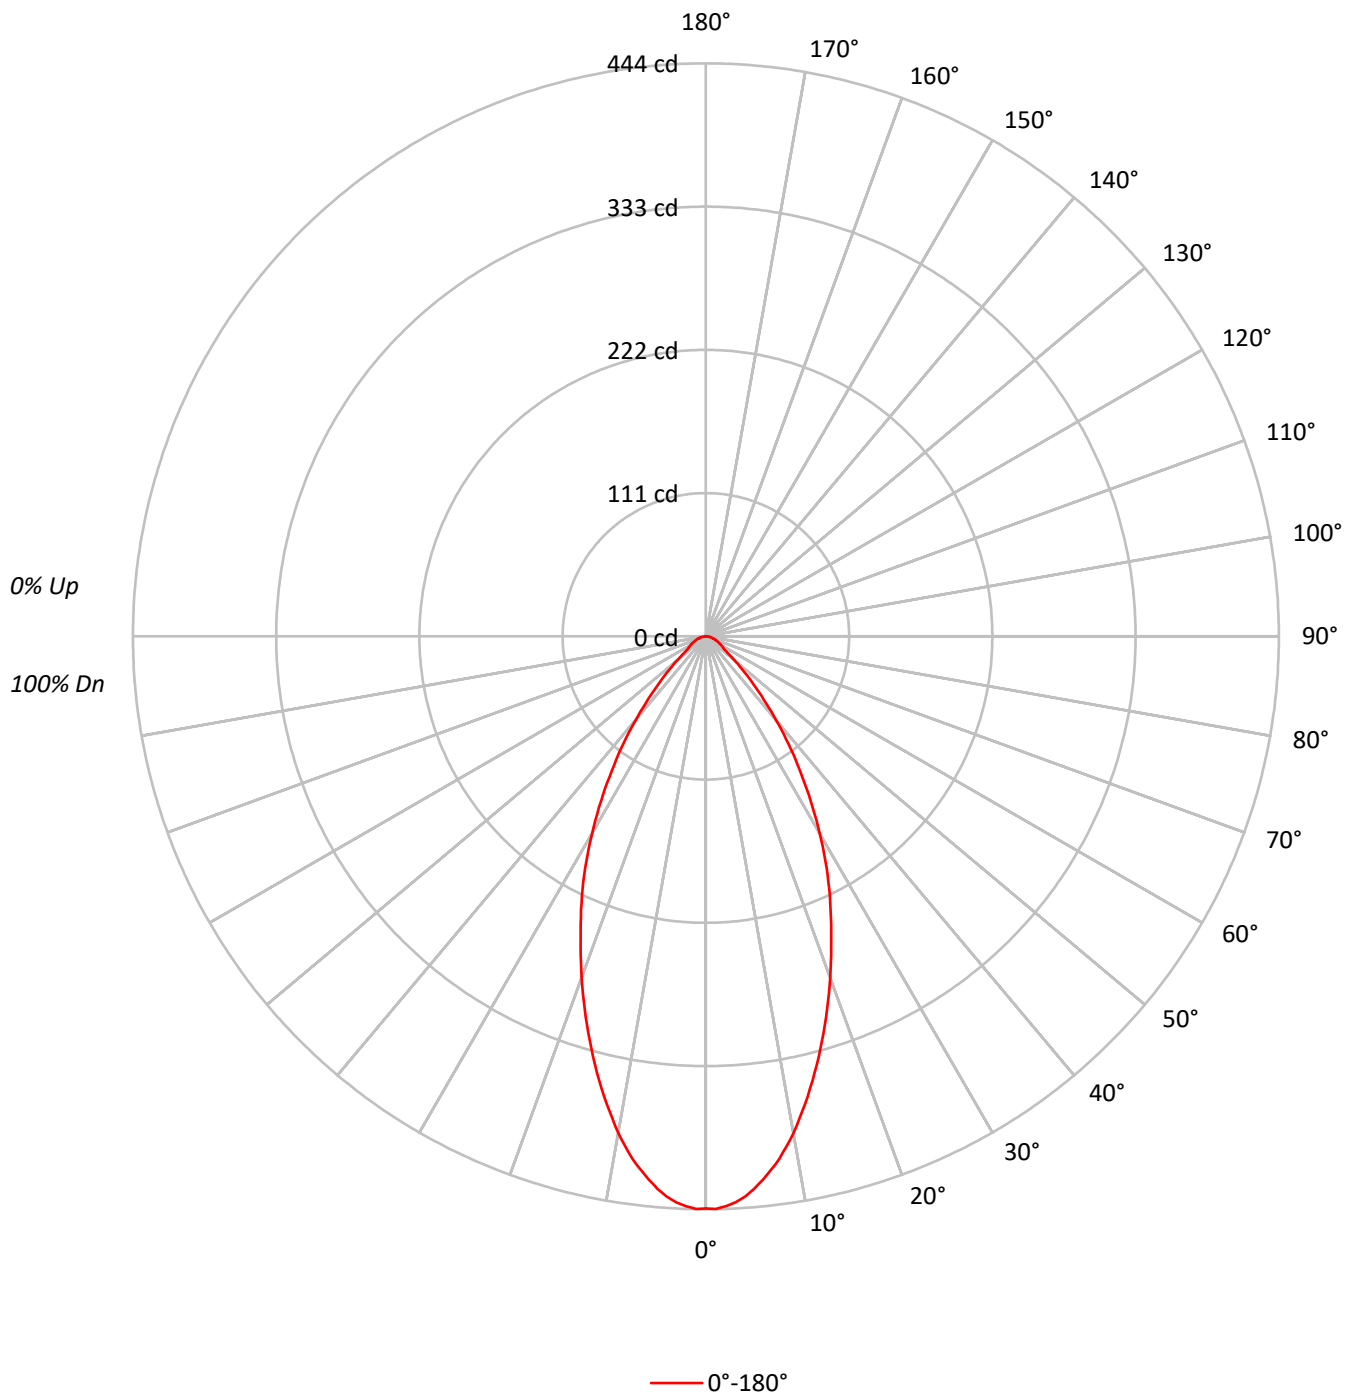



TEST NUMBER: P1286390

CATALOG NUMBER: P3AS05R209030D2WDE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	50	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	97207
5°	94607
10°	87039
15°	76618
20°	65712
25°	55189
30°	44614
35°	33943
40°	24160
45°	15940
50°	9893
55°	6499
60°	5921
65°	5448
70°	5129
75°	4660
80°	4420
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15940 cd/sqm

TEST NUMBER: P1286390

CATALOG NUMBER: P3AS05R209030D2WDE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.8	10.1
10°-20°	94.0	23.9
20°-30°	104.3	26.5
30°-40°	79.6	20.2
40°-50°	40.7	10.4
50°-60°	16.8	4.3
60°-70°	10.4	2.7
70°-80°	5.9	1.5
80°-90°	1.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	238.0	60.6
0°-40°	317.5	80.8
0°-60°	375.0	95.4
0°-90°	393.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	393.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	443	
5°	430	40
15°	338	94
25°	228	104
35°	127	80
45°	51	41
55°	17	17
65°	10	10
75°	6	6
85°	2	2
90°	0	



TEST NUMBER: P1286390

CATALOG NUMBER: P3AS05R209030D2WDE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	443.3
1°	443.8
2°	441.8
3°	439.3
4°	435.3
5°	429.8
6°	423.3
7°	416.3
8°	408.9
9°	399.9
10°	390.9
12.5°	364.9
15°	337.5
17.5°	309.5
20°	281.6
22.5°	253.6
25°	228.1
27.5°	202.7
30°	176.2
32.5°	151.3
35°	126.8
37.5°	105.3
40°	84.4
42.5°	66.4
45°	51.4
47.5°	38.9
50°	29.0
52.5°	21.5
55°	17.0
57.5°	15.5
60°	13.5
62.5°	12.0
65°	10.5
67.5°	9.0
70°	8.0
72.5°	6.5
75°	5.5
77.5°	4.5
80°	3.5
82.5°	2.5
85°	1.5
87.5°	0.5
90°	0.0

(END OF REPORT)