

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286454

Luminaire Tested: P3AS05R309030D2WDE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286454
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R309030D2WDE010 E3DLP1WH
Description: 3in Adjustable Dim to Warm LED luminaire with, R30 optic, 3000K CCT AND, 90CRI ,
E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 529.0 lumens
Efficiency: N/A
Efficacy: 47.7 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286454

CATALOG NUMBER: P3AS05R309030D2WDE010 E3DLP1WH

Luminous Intensity Polar Plot

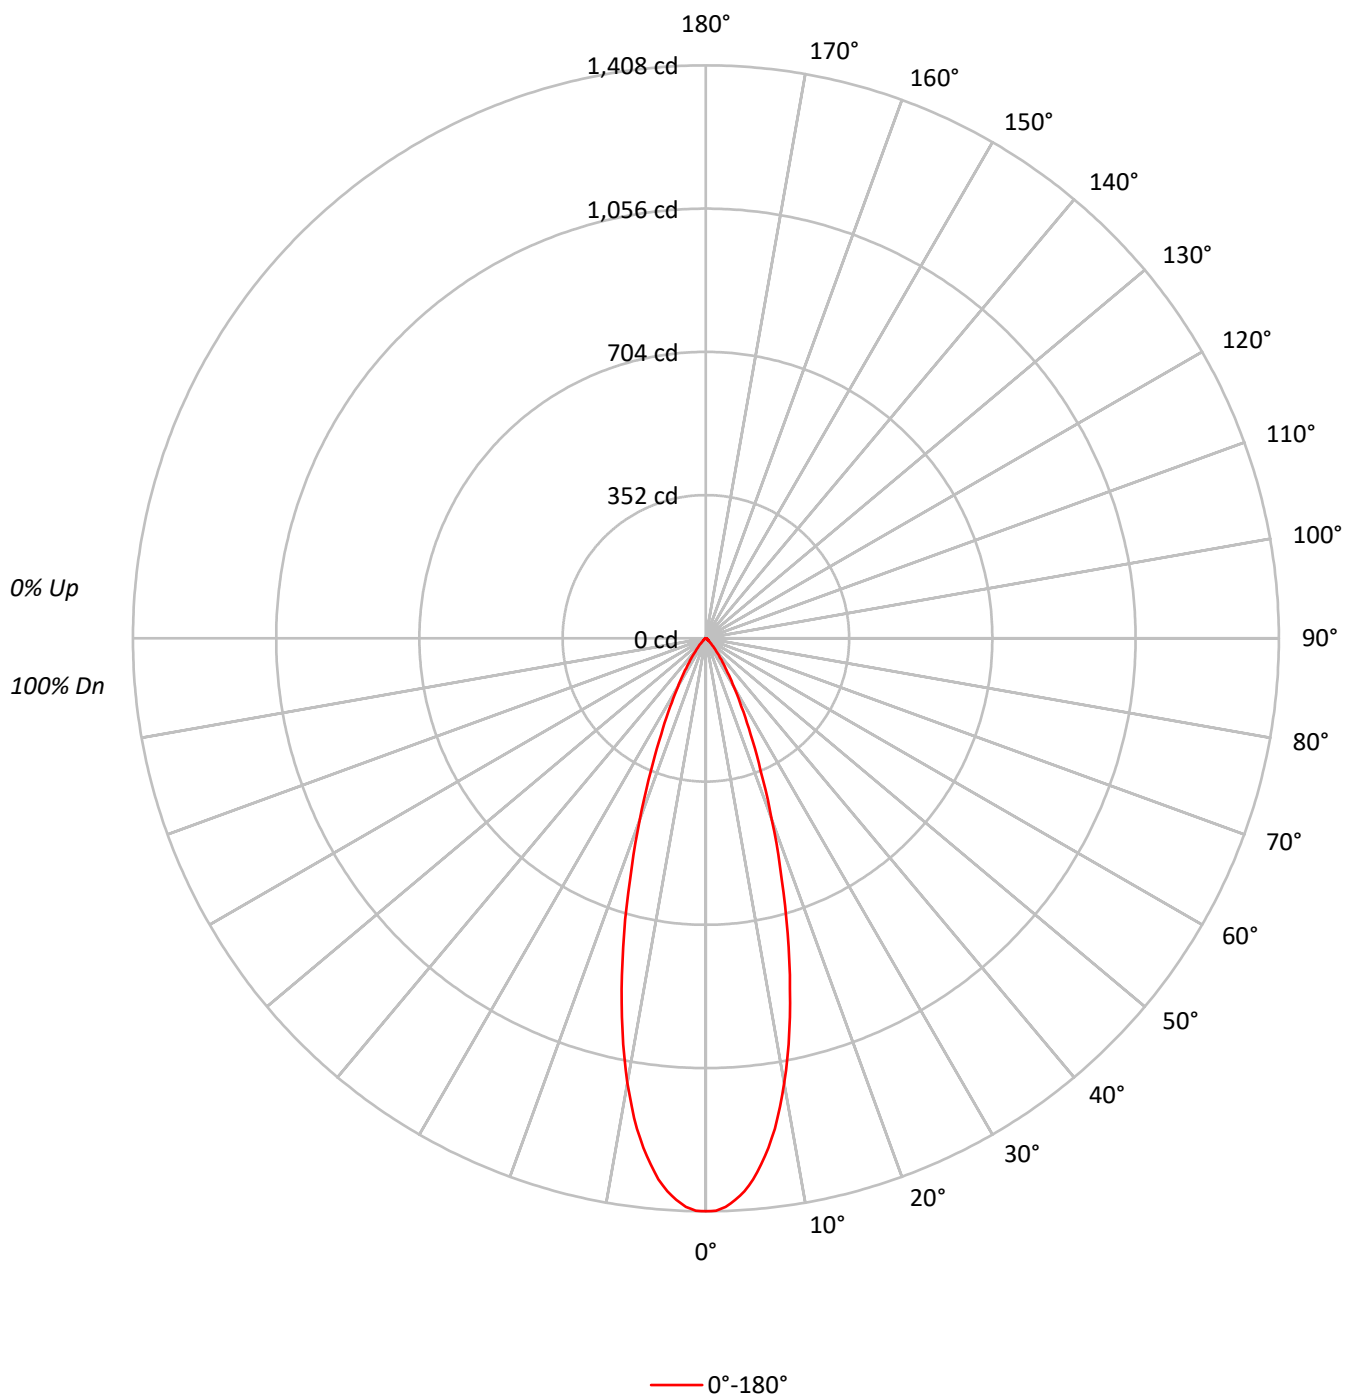

TEST NUMBER: P1286454

CATALOG NUMBER: P3AS05R309030D2WDE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		79
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	308681
5°	293814
10°	247134
15°	178230
20°	110540
25°	62883
30°	34917
35°	19006
40°	10019
45°	5427
50°	2900
55°	1912
60°	1754
65°	1816
70°	1603
75°	1271
80°	1263
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5427 cd/sqm

TEST NUMBER: P1286454

CATALOG NUMBER: P3AS05R309030D2WDE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.2	22.7
10°-20°	213.7	40.4
20°-30°	123.5	23.3
30°-40°	46.9	8.9
40°-50°	14.4	2.7
50°-60°	4.8	0.9
60°-70°	3.3	0.6
70°-80°	1.8	0.3
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	457.3	86.4
0°-40°	504.2	95.3
0°-60°	523.4	98.9
0°-90°	529.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	529.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1408	
5°	1335	120
15°	785	214
25°	260	123
35°	71	47
45°	18	14
55°	5	5
65°	4	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1286454

CATALOG NUMBER: P3AS05R309030D2WDE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1407.7
1°	1406.7
2°	1398.2
3°	1382.2
4°	1362.3
5°	1334.8
6°	1299.8
7°	1260.8
8°	1217.3
9°	1165.4
10°	1109.9
11°	1049.9
12°	986.5
13°	920.0
14°	852.5
15°	785.1
17.5°	619.2
20°	473.7
22.5°	351.3
25°	259.9
27.5°	188.9
30°	137.9
32.5°	99.4
35°	71.0
37.5°	49.5
40°	35.0
42.5°	24.5
45°	17.5
47.5°	12.0
50°	8.5
52.5°	6.0
55°	5.0
57.5°	4.5
60°	4.0
62.5°	3.5
65°	3.5
67.5°	3.0
70°	2.5
72.5°	2.0
75°	1.5
77.5°	1.5
80°	1.0
82.5°	1.0
85°	0.5
87.5°	0.0



TEST NUMBER: P1286454

CATALOG NUMBER: P3AS05R309030D2WDE010 E3DLP1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)