

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286466

Luminaire Tested: P3AS05R359030D2WDE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286466
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359030D2WDE010 E3DL1GPH
Description: 3in Adjustable Dim to Warm LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 257.0 lumens
Efficiency: N/A
Efficacy: 23.1 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286466
CATALOG NUMBER: P3AS05R359030D2WDE010 E3DL1GPH

Luminous Intensity Polar Plot

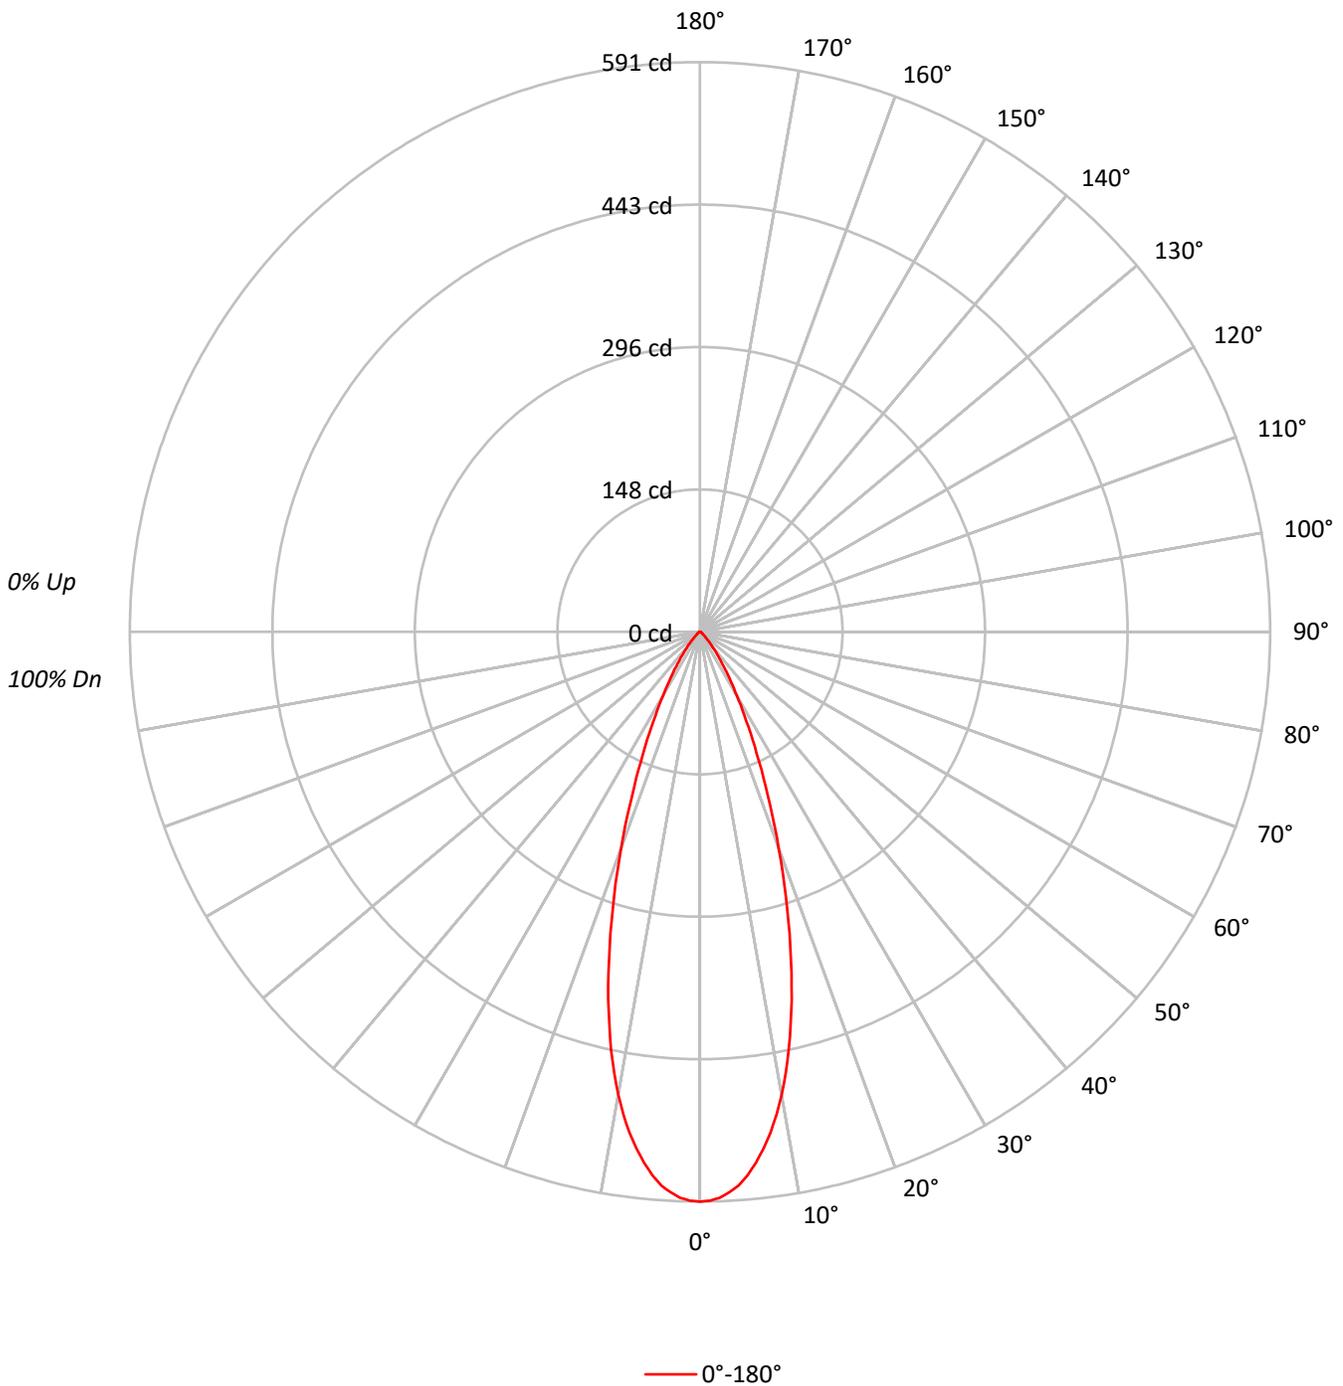



TEST NUMBER: P1286466
 CATALOG NUMBER: P3AS05R359030D2WDE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	96	96	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	91	91	91	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	86	86	86	85
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	82	82	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	78	78	78	77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	74	74	74	73
7	89	81	76	72	88	80	75	72	79	75	72	78	74	71	77	73	71	71	71	71	70
8	85	77	72	69	84	77	72	69	76	71	68	75	71	68	74	70	68	68	68	68	67
9	82	74	69	66	81	74	69	65	73	68	65	72	68	65	71	68	65	65	65	65	64
10	79	71	66	63	78	71	66	63	70	66	63	69	65	62	69	65	62	62	62	62	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	129617
5°	124565
10°	108548
15°	83133
20°	55632
25°	33655
30°	19319
35°	10788
40°	5725
45°	2946
50°	1433
55°	1109
60°	1053
65°	882
70°	962
75°	847
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2946 cd/sqm



TEST NUMBER: P1286466

CATALOG NUMBER: P3AS05R359030D2WDE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.5	20.0
10°-20°	99.8	38.8
20°-30°	65.3	25.4
30°-40°	26.5	10.3
40°-50°	7.9	3.1
50°-60°	2.7	1.1
60°-70°	1.8	0.7
70°-80°	1.1	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	216.6	84.3
0°-40°	243.1	94.6
0°-60°	253.7	98.8
0°-90°	257.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	257.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	591	
5°	566	51
15°	366	100
25°	139	65
35°	40	26
45°	10	8
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1286466
CATALOG NUMBER: P3AS05R359030D2WDE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	591.1
1°	590.1
2°	587.4
3°	582.1
4°	575.7
5°	565.9
6°	553.7
7°	540.0
8°	524.6
9°	507.0
10°	487.5
11°	465.7
12°	443.0
13°	417.5
14°	393.3
15°	366.2
17.5°	300.4
20°	238.4
22.5°	183.3
25°	139.1
27.5°	103.7
30°	76.3
32.5°	56.0
35°	40.3
37.5°	28.6
40°	20.0
42.5°	13.9
45°	9.5
47.5°	6.4
50°	4.2
52.5°	3.2
55°	2.9
57.5°	2.7
60°	2.4
62.5°	2.2
65°	1.7
67.5°	1.5
70°	1.5
72.5°	1.2
75°	1.0
77.5°	0.7
80°	0.7
82.5°	0.5
85°	0.2
87.5°	0.2



TEST NUMBER: P1286466
CATALOG NUMBER: P3AS05R359030D2WDE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)