

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286504

Luminaire Tested: P3AS05R409030D2WDE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286504
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R409030D2WDE010 E3DLD1GPH
Description: 3in Adjustable Dim to Warm LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 219.0 lumens
Efficiency: N/A
Efficacy: 19.7 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286504

CATALOG NUMBER: P3AS05R409030D2WDE010 E3DLD1GPH

Luminous Intensity Polar Plot

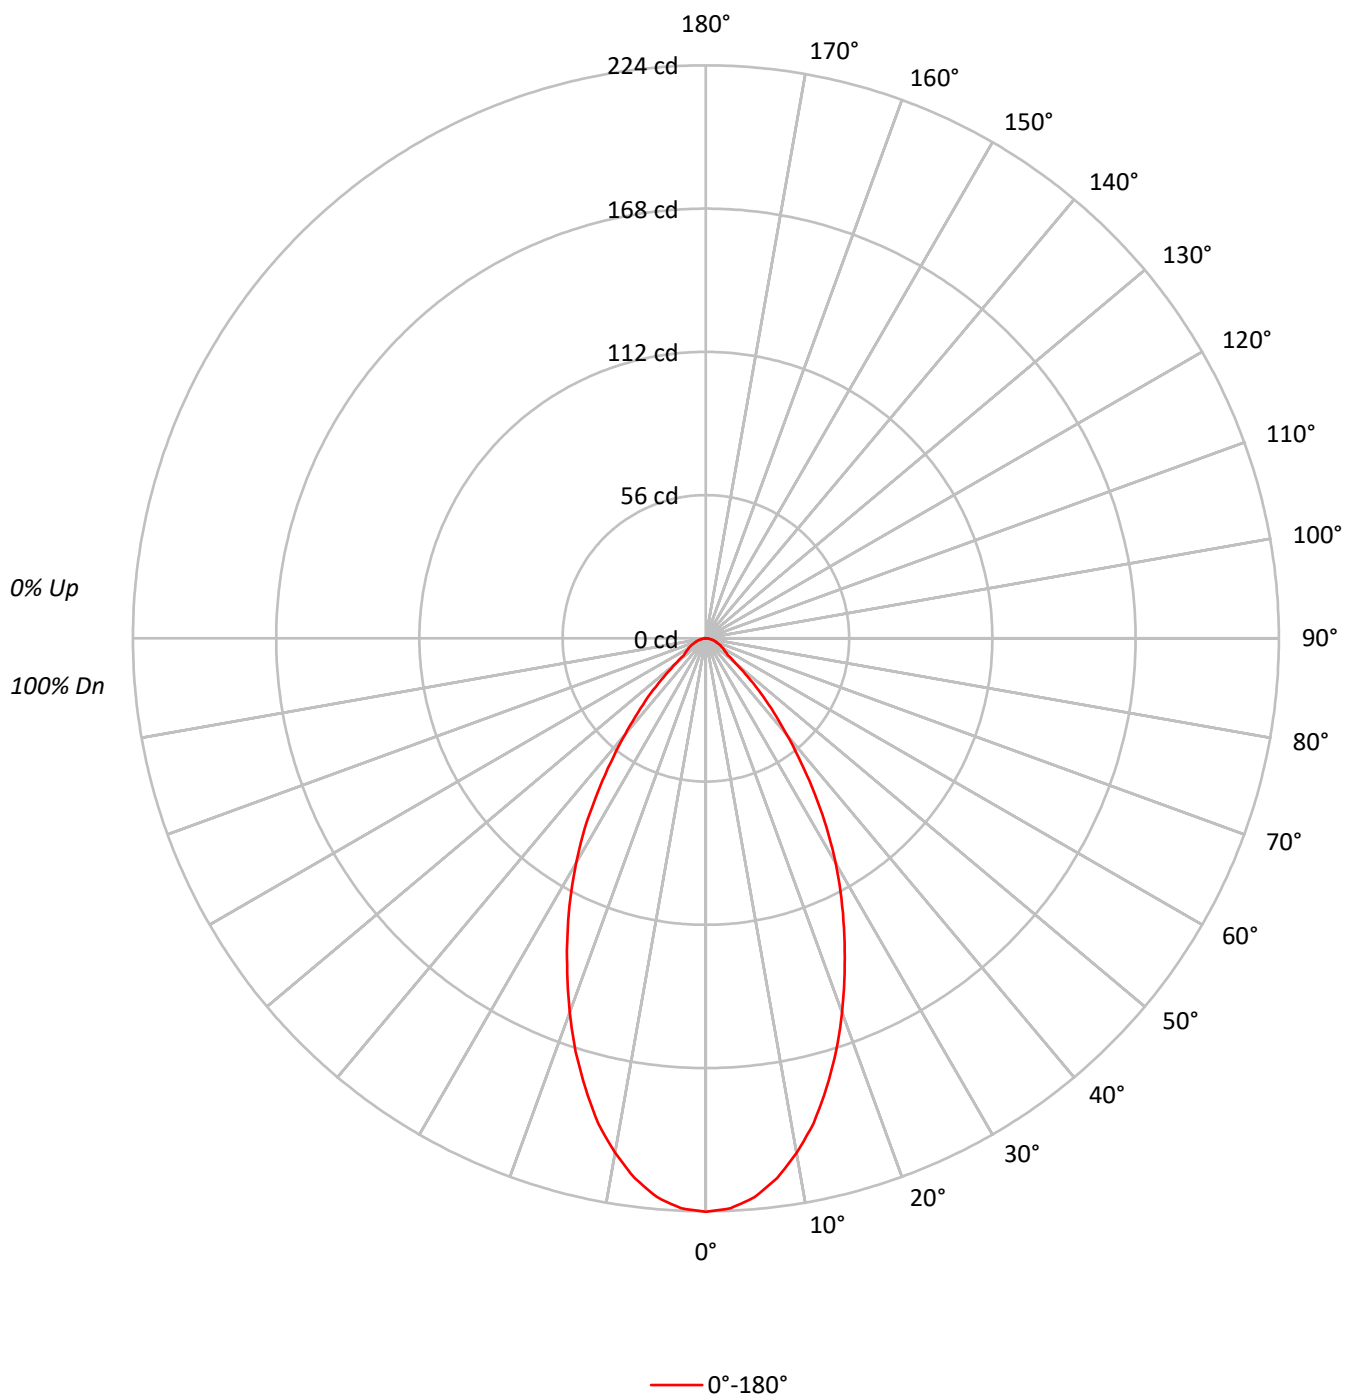

TEST NUMBER: P1286504

CATALOG NUMBER: P3AS05R409030D2WDE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	49163
5°	48272
10°	45490
15°	41317
20°	36310
25°	30994
30°	25675
35°	19809
40°	14084
45°	9489
50°	5185
55°	3670
60°	3421
65°	3165
70°	2821
75°	2711
80°	2147
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 9489 cd/sqm

TEST NUMBER: P1286504

CATALOG NUMBER: P3AS05R409030D2WDE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	20.5	9.3
10°-20°	50.7	23.2
20°-30°	58.6	26.8
30°-40°	46.2	21.1
40°-50°	23.7	10.8
50°-60°	9.1	4.1
60°-70°	6.0	2.7
70°-80°	3.3	1.5
80°-90°	1.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	129.8	59.3
0°-40°	176.0	80.4
0°-60°	208.8	95.3
0°-90°	219.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	219.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	224	
5°	219	20
15°	182	51
25°	128	59
35°	74	46
45°	31	24
55°	10	9
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1286504

CATALOG NUMBER: P3AS05R409030D2WDE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	224.2
2.5°	223.0
5°	219.3
7.5°	212.9
10°	204.3
12.5°	194.3
15°	182.0
17.5°	169.3
20°	155.6
22.5°	141.6
25°	128.1
27.5°	114.7
30°	101.4
32.5°	88.0
35°	74.0
37.5°	61.0
40°	49.2
42.5°	39.2
45°	30.6
47.5°	22.3
50°	15.2
52.5°	11.0
55°	9.6
57.5°	8.6
60°	7.8
62.5°	6.9
65°	6.1
67.5°	5.1
70°	4.4
72.5°	3.7
75°	3.2
77.5°	2.5
80°	1.7
82.5°	1.5
85°	0.7
87.5°	0.5
90°	0.0

(END OF REPORT)