

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286534

Luminaire Tested: P3AS05R459030D2WDE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286534
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R459030D2WDE010 E3DLD1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R45 optic, 3000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 433.1 lumens
Efficiency: N/A
Efficacy: 39.0 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286534
CATALOG NUMBER: P3AS05R459030D2WDE010 E3DLD1WMH

Luminous Intensity Polar Plot

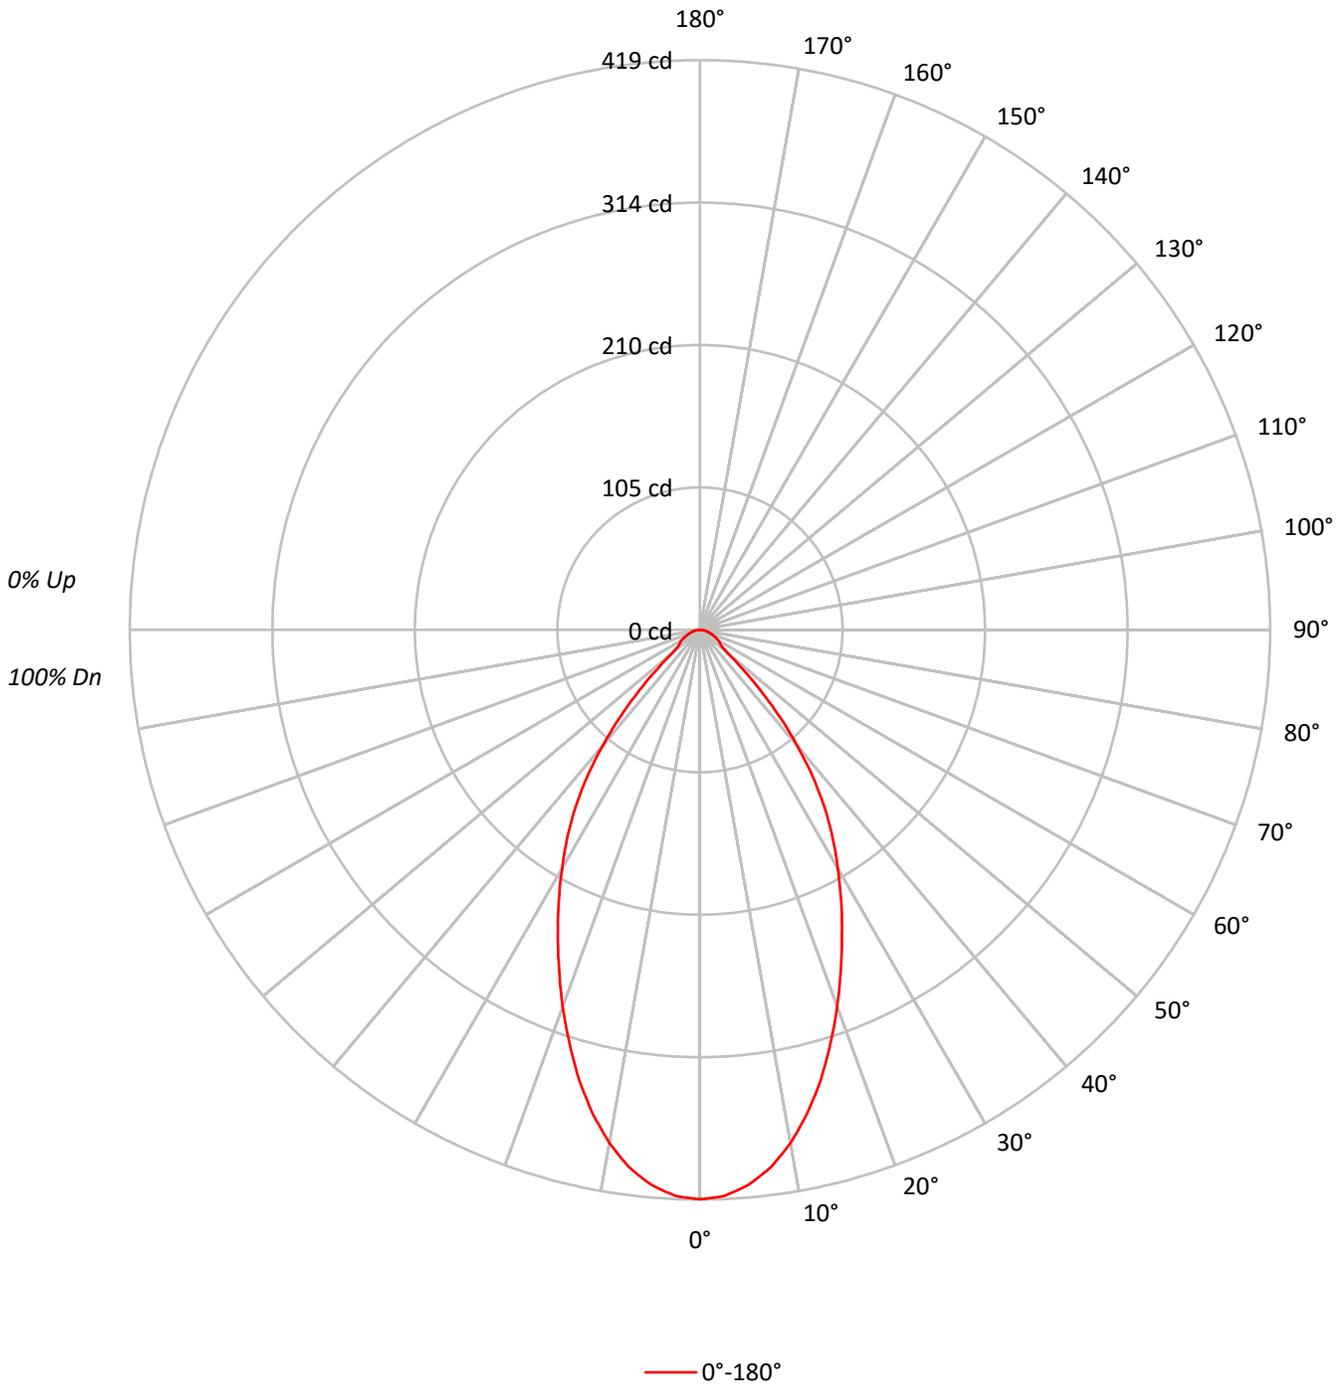



TEST NUMBER: P1286534

CATALOG NUMBER: P3AS05R459030D2WDE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91				91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83				83
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75				75
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69				69
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63				63
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58				58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54				54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50				50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47				47
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44				44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	91813
5°	90182
10°	85325
15°	77821
20°	68816
25°	59762
30°	51299
35°	42750
40°	31860
45°	19506
50°	9006
55°	7073
60°	6798
65°	6226
70°	5770
75°	5507
80°	5051
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19506 cd/sqm



TEST NUMBER: P1286534

CATALOG NUMBER: P3AS05R459030D2WDE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.3	8.8
10°-20°	95.4	22.0
20°-30°	113.4	26.2
30°-40°	98.5	22.8
40°-50°	49.4	11.4
50°-60°	17.2	4.0
60°-70°	12.1	2.8
70°-80°	6.7	1.6
80°-90°	2.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	247.1	57.1
0°-40°	345.7	79.8
0°-60°	412.2	95.2
0°-90°	433.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	433.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	419	
5°	410	38
15°	343	95
25°	247	113
35°	160	99
45°	63	49
55°	18	17
65°	12	12
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1286534
CATALOG NUMBER: P3AS05R459030D2WDE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	418.7
2.5°	416.7
5°	409.7
7.5°	398.7
10°	383.2
12.5°	364.3
15°	342.8
17.5°	318.9
20°	294.9
22.5°	270.5
25°	247.0
27.5°	224.6
30°	202.6
32.5°	181.6
35°	159.7
37.5°	136.2
40°	111.3
42.5°	86.8
45°	62.9
47.5°	41.4
50°	26.4
52.5°	20.5
55°	18.5
57.5°	17.0
60°	15.5
62.5°	14.0
65°	12.0
67.5°	10.5
70°	9.0
72.5°	7.5
75°	6.5
77.5°	5.0
80°	4.0
82.5°	3.0
85°	1.5
87.5°	1.0
90°	0.0

(END OF REPORT)