

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286596

Luminaire Tested: P3AS05R559030D2WDE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286596
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R559030D2WDE010 E3DLP1MW
Description: 3in Adjustable Dim to Warm LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,
E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 363.0 lumens
Efficiency: N/A
Efficacy: 32.7 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286596
CATALOG NUMBER: P3AS05R559030D2WDE010 E3DLP1MW

Luminous Intensity Polar Plot

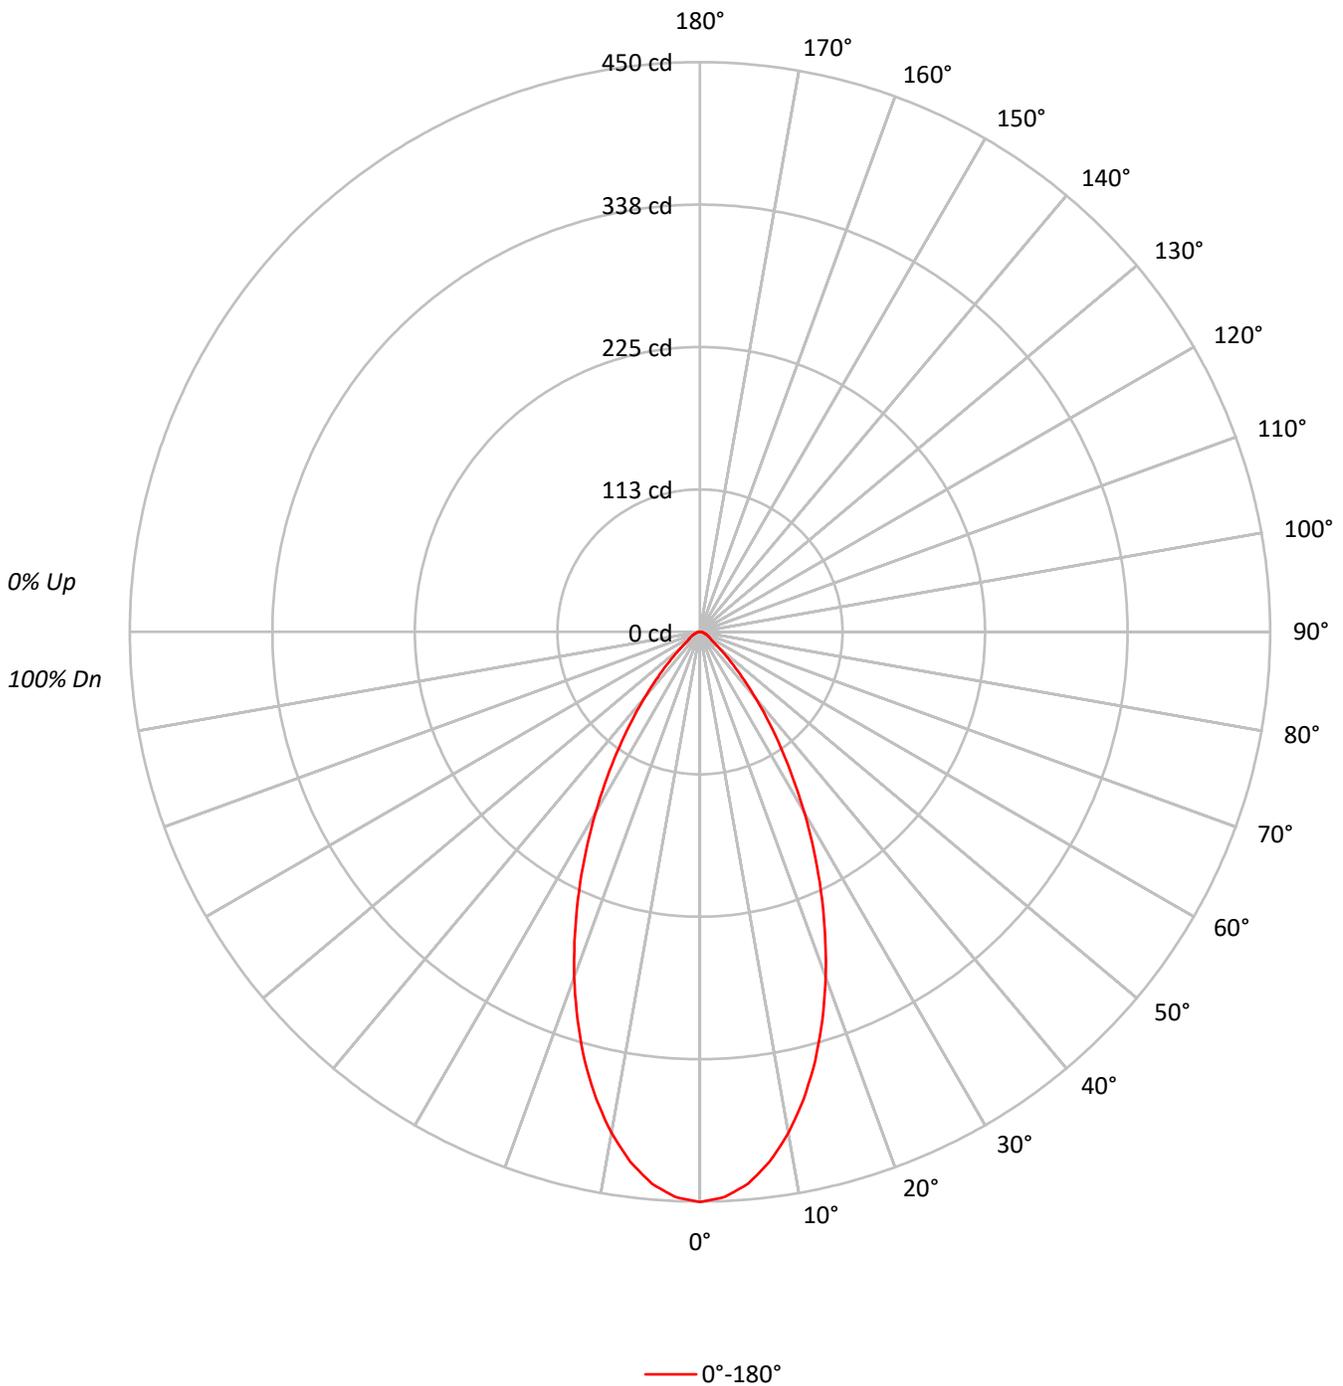



TEST NUMBER: P1286596
 CATALOG NUMBER: P3AS05R559030D2WDE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92				92
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79				79
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	80	77	74	73				73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67				67
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	67	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55				55
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52				52
10	70	60	54	51	69	60	54	50	59	54	50	58	54	50	58	53	50	49				49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	98742
5°	96280
10°	89511
15°	79705
20°	67719
25°	54656
30°	41677
35°	29634
40°	19551
45°	11598
50°	6789
55°	4205
60°	3728
65°	3373
70°	2885
75°	2542
80°	2526
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11598 cd/sqm



TEST NUMBER: P1286596

CATALOG NUMBER: P3AS05R559030D2WDE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.6	11.2
10°-20°	97.3	26.8
20°-30°	103.1	28.4
30°-40°	69.7	19.2
40°-50°	30.5	8.4
50°-60°	10.9	3.0
60°-70°	6.4	1.8
70°-80°	3.4	0.9
80°-90°	1.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	241.0	66.4
0°-40°	310.7	85.6
0°-60°	352.2	97.0
0°-90°	363.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	363.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	450	
5°	437	41
15°	351	97
25°	226	103
35°	111	70
45°	37	31
55°	11	11
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1286596
CATALOG NUMBER: P3AS05R559030D2WDE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	450.3
2.5°	446.8
5°	437.4
7.5°	421.9
10°	402.0
12.5°	378.0
15°	351.1
17.5°	321.2
20°	290.2
22.5°	257.8
25°	225.9
27.5°	194.5
30°	164.6
32.5°	136.1
35°	110.7
37.5°	87.8
40°	68.3
42.5°	51.4
45°	37.4
47.5°	27.4
50°	19.9
52.5°	14.0
55°	11.0
57.5°	10.0
60°	8.5
62.5°	7.5
65°	6.5
67.5°	5.5
70°	4.5
72.5°	4.0
75°	3.0
77.5°	2.5
80°	2.0
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)