

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286624

Luminaire Tested: P3AS05R609030D2WDE010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286624
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R609030D2WDE010 E3DLP1LI
Description: 3in Adjustable Dim to Warm LED luminaire with, R60 optic, 3000K CCT AND, 90CRI ,
E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 363.0 lumens
Efficiency: N/A
Efficacy: 32.7 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286624

CATALOG NUMBER: P3AS05R609030D2WDE010 E3DLP1LI

Luminous Intensity Polar Plot

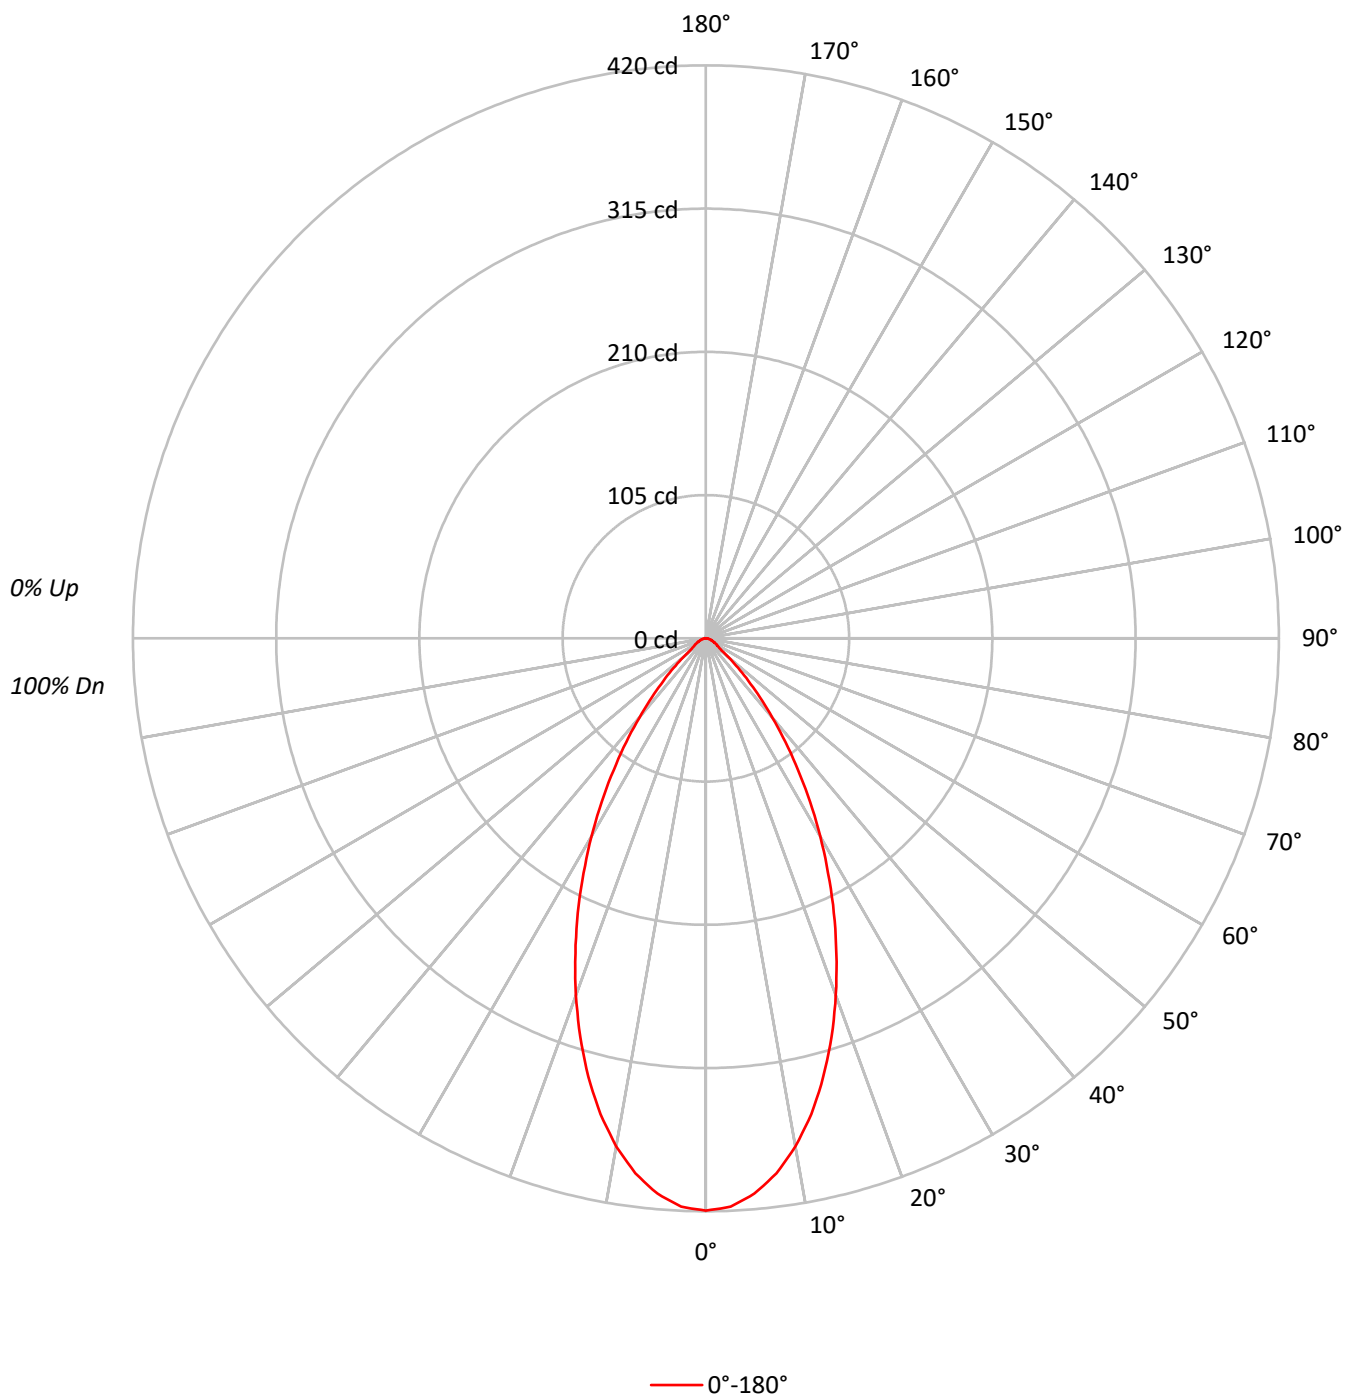

TEST NUMBER: P1286624

CATALOG NUMBER: P3AS05R609030D2WDE010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	60	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	91988
5°	89940
10°	84189
15°	75528
20°	64966
25°	53713
30°	42437
35°	31507
40°	21698
45°	13614
50°	7471
55°	4396
60°	3947
65°	3373
70°	2885
75°	2965
80°	2526
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13614 cd/sqm

TEST NUMBER: P1286624

CATALOG NUMBER: P3AS05R609030D2WDE010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.0	10.5
10°-20°	92.4	25.5
20°-30°	101.4	27.9
30°-40°	73.8	20.3
40°-50°	34.9	9.6
50°-60°	11.4	3.2
60°-70°	6.5	1.8
70°-80°	3.5	1.0
80°-90°	1.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	231.8	63.9
0°-40°	305.7	84.2
0°-60°	352.0	97.0
0°-90°	363.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	363.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	420	
5°	409	38
15°	333	92
25°	222	101
35°	118	74
45°	44	35
55°	12	11
65°	6	6
75°	4	3
85°	1	1
90°	0	

TEST NUMBER: P1286624

CATALOG NUMBER: P3AS05R609030D2WDE010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	419.5
2.5°	417.0
5°	408.6
7.5°	395.6
10°	378.1
12.5°	357.2
15°	332.7
17.5°	306.3
20°	278.4
22.5°	249.9
25°	222.0
27.5°	194.1
30°	167.6
32.5°	142.2
35°	117.7
37.5°	95.8
40°	75.8
42.5°	58.4
45°	43.9
47.5°	31.9
50°	21.9
52.5°	14.5
55°	11.5
57.5°	10.0
60°	9.0
62.5°	7.5
65°	6.5
67.5°	5.5
70°	4.5
72.5°	4.0
75°	3.5
77.5°	2.5
80°	2.0
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)