

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286650

Luminaire Tested: P3AS05R659030D2WDE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286650
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659030D2WDE010 E3DLD1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 393.1 lumens
Efficiency: N/A
Efficacy: 35.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286650

CATALOG NUMBER: P3AS05R659030D2WDE010 E3DLD1WMH

Luminous Intensity Polar Plot

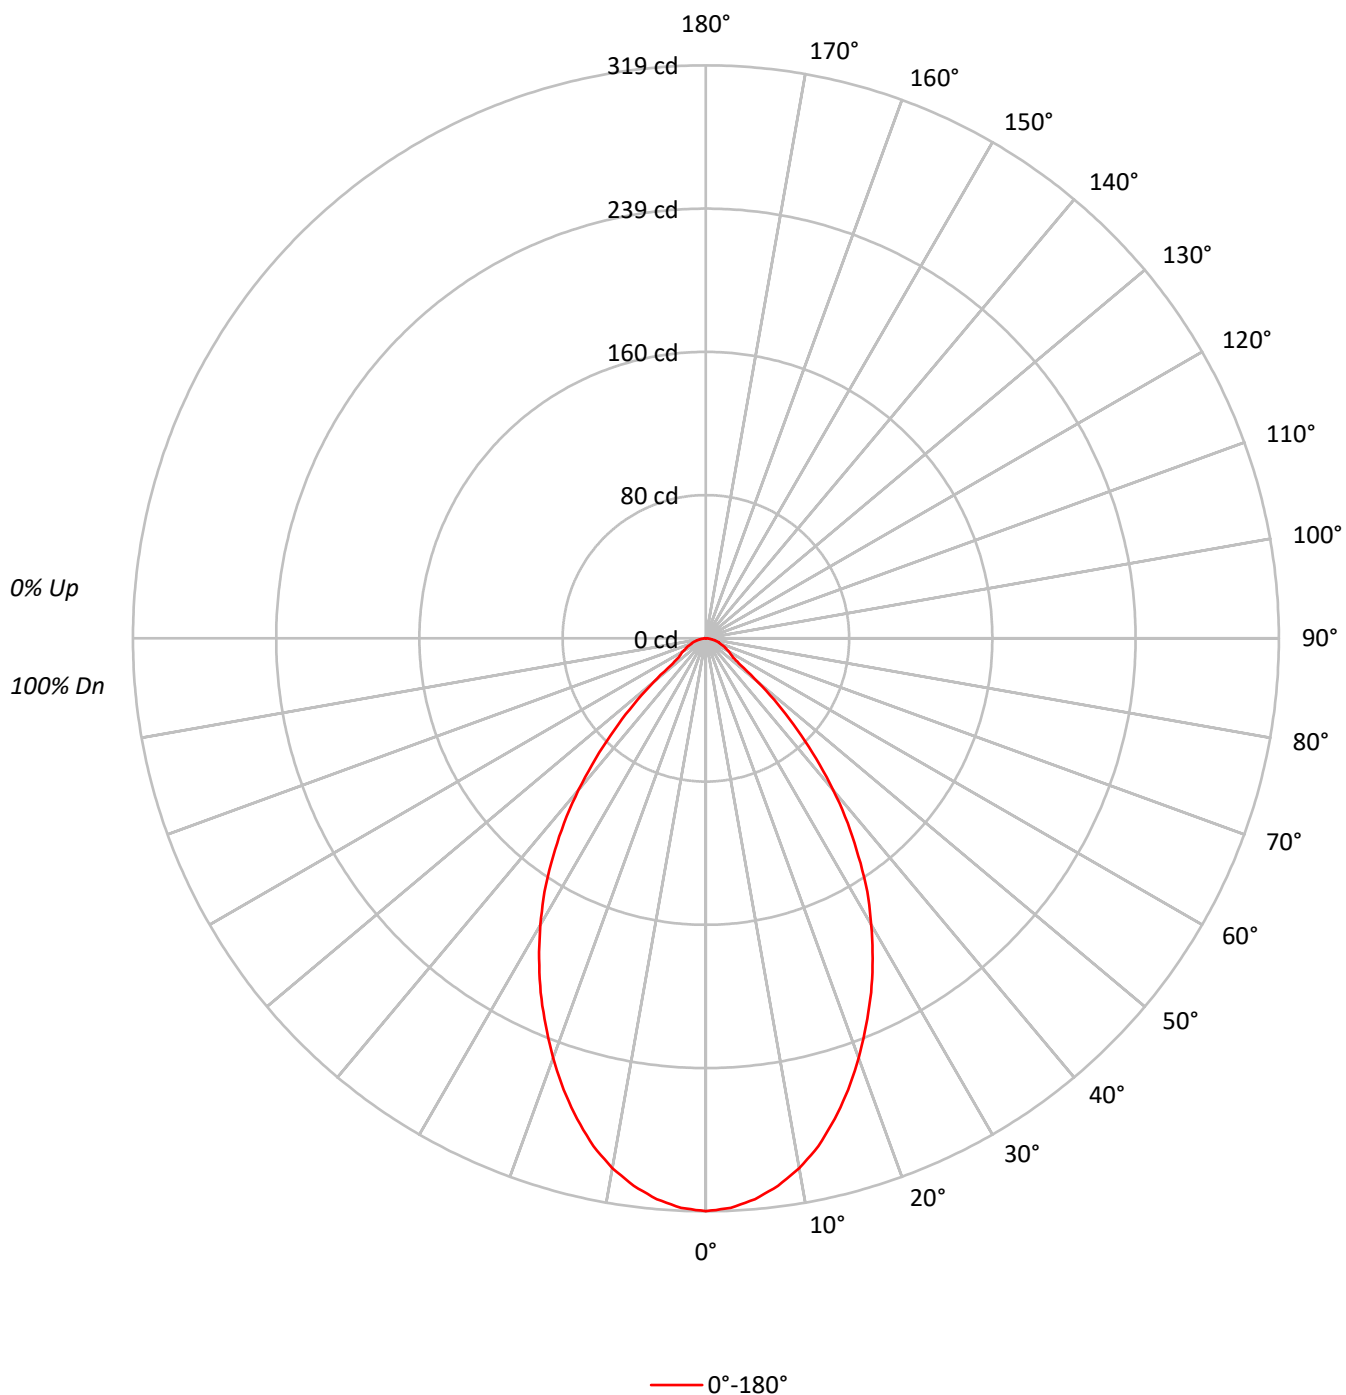

TEST NUMBER: P1286650

CATALOG NUMBER: P3AS05R659030D2WDE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	69929
5°	68985
10°	66688
15°	62883
20°	58012
25°	52648
30°	46640
35°	39672
40°	31573
45°	22297
50°	12929
55°	7073
60°	6578
65°	5967
70°	5450
75°	5083
80°	4420
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22297 cd/sqm

TEST NUMBER: P1286650

CATALOG NUMBER: P3AS05R659030D2WDE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.5	7.5
10°-20°	77.5	19.7
20°-30°	99.6	25.3
30°-40°	92.1	23.4
40°-50°	55.6	14.1
50°-60°	19.0	4.8
60°-70°	11.4	2.9
70°-80°	6.5	1.6
80°-90°	1.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	206.6	52.6
0°-40°	298.7	76.0
0°-60°	373.3	95.0
0°-90°	393.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	393.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	319	
5°	313	29
15°	277	77
25°	218	100
35°	148	92
45°	72	56
55°	18	19
65°	12	11
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1286650

CATALOG NUMBER: P3AS05R659030D2WDE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	318.9
2.5°	317.4
5°	313.4
7.5°	307.5
10°	299.5
12.5°	289.5
15°	277.0
17.5°	263.5
20°	248.6
22.5°	233.1
25°	217.6
27.5°	201.1
30°	184.2
32.5°	167.2
35°	148.2
37.5°	129.8
40°	110.3
42.5°	90.8
45°	71.9
47.5°	54.4
50°	37.9
52.5°	24.0
55°	18.5
57.5°	16.5
60°	15.0
62.5°	13.0
65°	11.5
67.5°	10.0
70°	8.5
72.5°	7.5
75°	6.0
77.5°	5.0
80°	3.5
82.5°	2.5
85°	1.5
87.5°	1.0
90°	0.0

(END OF REPORT)