

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286658

Luminaire Tested: P3AS05R709030D2WDE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286658
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R709030D2WDE010 E3CB1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R70 optic, 3000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 624.1 lumens
Efficiency: N/A
Efficacy: 56.2 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286658

CATALOG NUMBER: P3AS05R709030D2WDE010 E3CB1MMS

Luminous Intensity Polar Plot

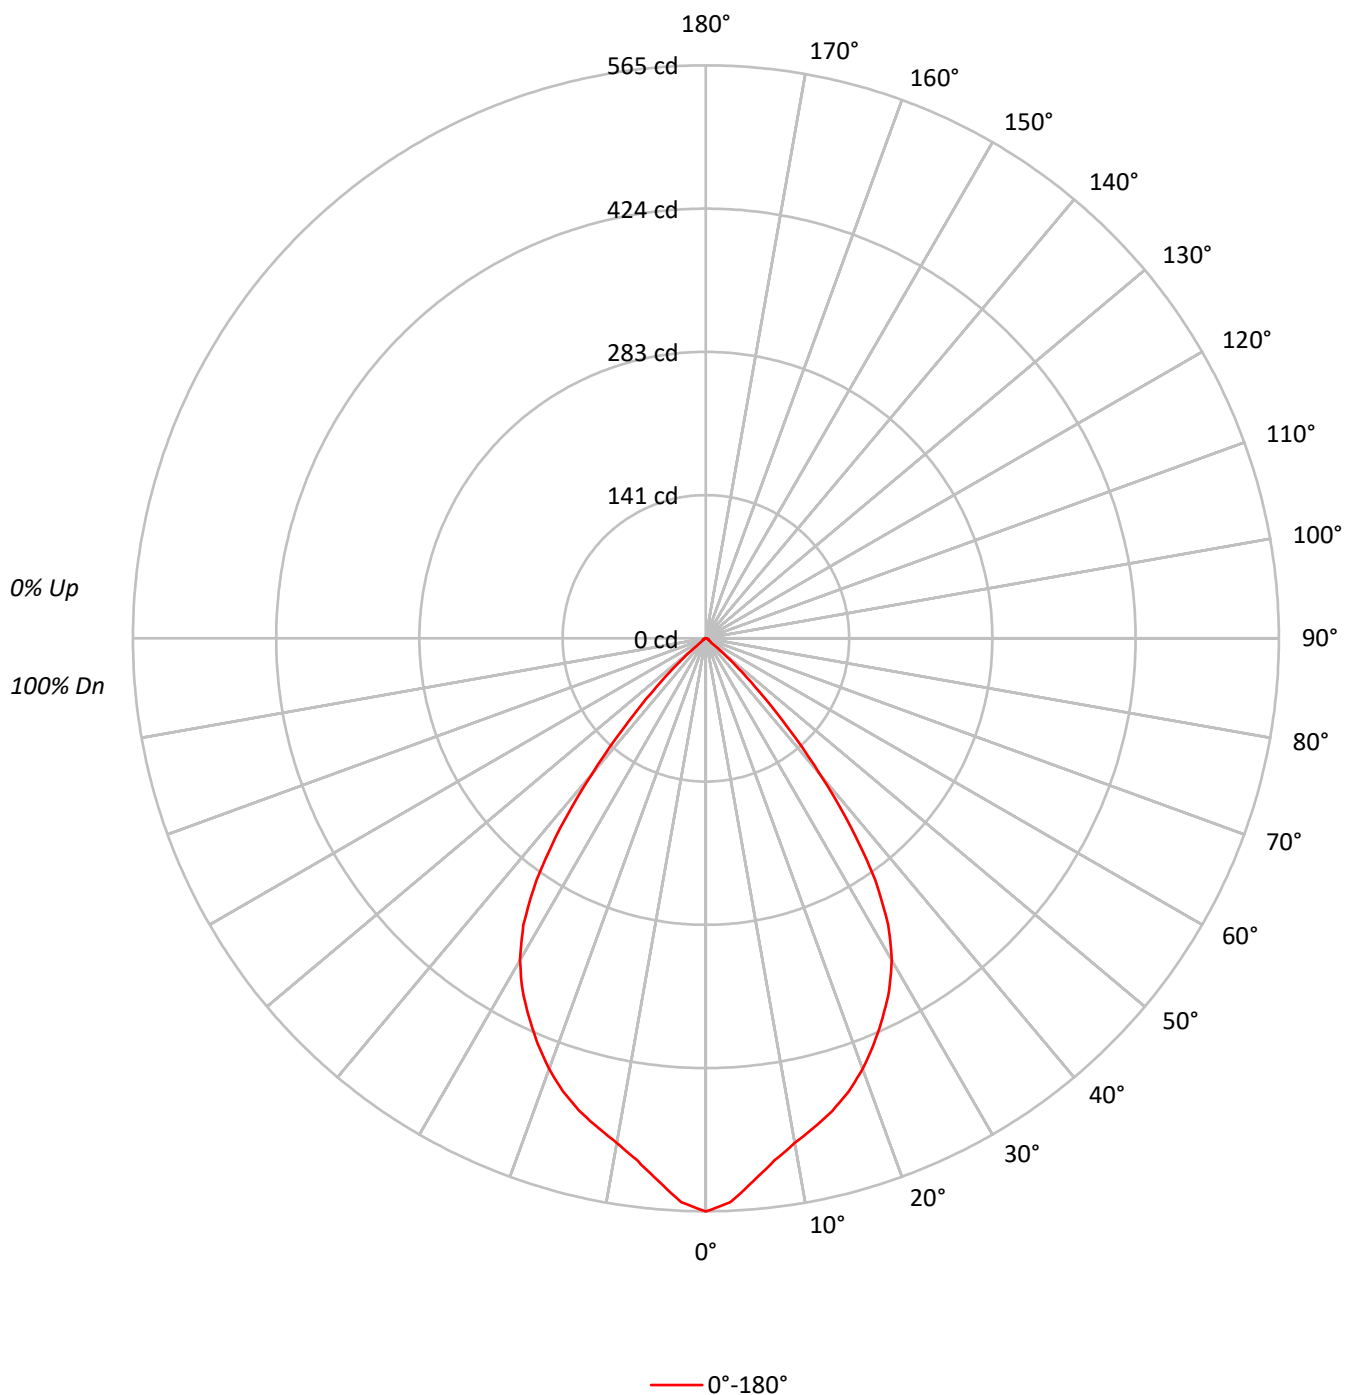

TEST NUMBER: P1286658

CATALOG NUMBER: P3AS05R709030D2WDE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	95	87	81	77	94	86	81	76	84	79	75		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	76	66	59	55	75	65	59	55	64	58	55		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	50		58
10	68	58	52	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	123916
5°	118226
10°	112490
15°	109490
20°	105453
25°	99804
30°	92824
35°	77979
40°	50266
45°	23351
50°	6141
55°	1529
60°	1535
65°	1297
70°	1282
75°	1271
80°	1263
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23351 cd/sqm

TEST NUMBER: P1286658

CATALOG NUMBER: P3AS05R709030D2WDE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.3	8.1
10°-20°	135.5	21.7
20°-30°	189.3	30.3
30°-40°	175.6	28.1
40°-50°	62.9	10.1
50°-60°	5.3	0.9
60°-70°	2.7	0.4
70°-80°	1.7	0.3
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	375.1	60.1
0°-40°	550.7	88.2
0°-60°	619.0	99.2
0°-90°	624.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	624.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	565	
5°	537	50
15°	482	136
25°	412	189
35°	291	176
45°	75	63
55°	4	5
65°	2	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1286658

CATALOG NUMBER: P3AS05R709030D2WDE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	565.1
2.5°	556.6
5°	537.1
7.5°	519.2
10°	505.2
12.5°	493.8
15°	482.3
17.5°	468.3
20°	451.9
22.5°	432.9
25°	412.5
27.5°	391.5
30°	366.6
32.5°	334.7
35°	291.3
37.5°	235.9
40°	175.6
42.5°	119.7
45°	75.3
47.5°	41.9
50°	18.0
52.5°	6.0
55°	4.0
57.5°	3.5
60°	3.5
62.5°	3.0
65°	2.5
67.5°	2.5
70°	2.0
72.5°	2.0
75°	1.5
77.5°	1.5
80°	1.0
82.5°	1.0
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)