

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286723

Luminaire Tested: P3AS09R209030D2WDE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286723
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R209030D2WDE010 E3D1WH
Description: 3in Adjustable Dim to Warm LED luminaire with, R20 optic, 3000K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 839.0 lumens
Efficiency: N/A
Efficacy: 57.1 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286723

CATALOG NUMBER: P3AS09R209030D2WDE010 E3D1WH

Luminous Intensity Polar Plot

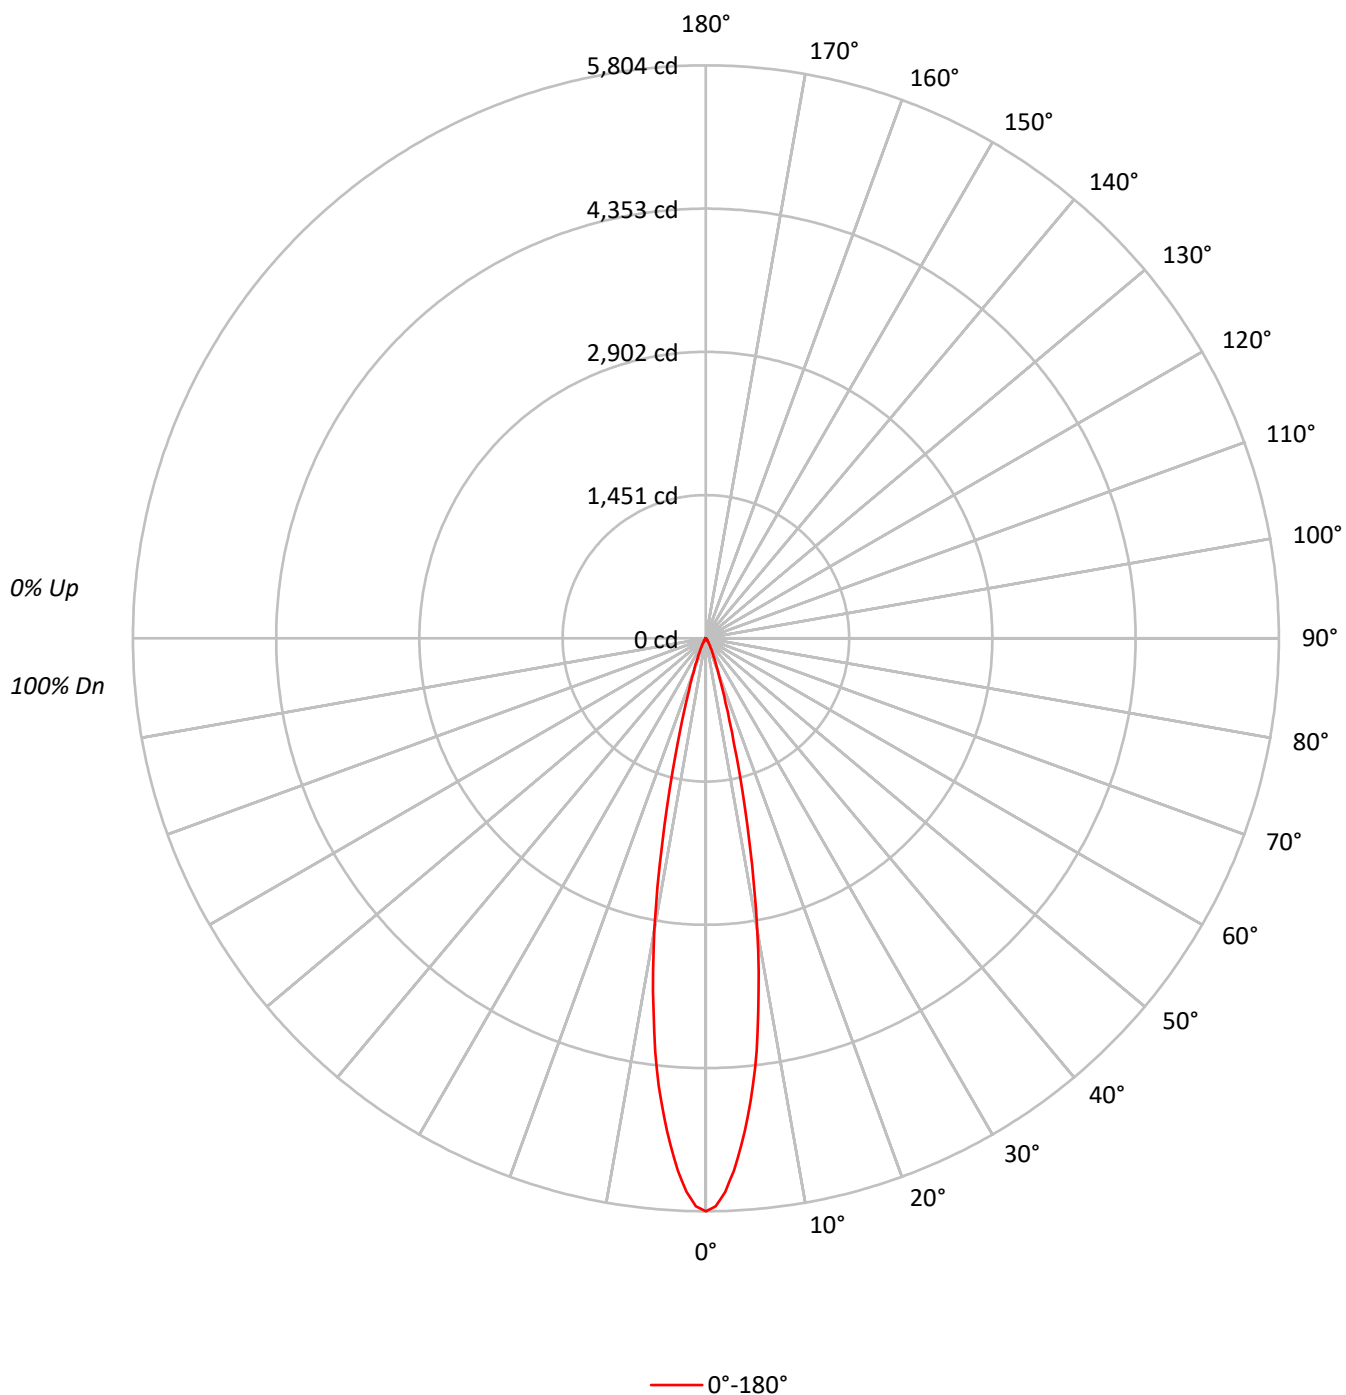

TEST NUMBER: P1286723

CATALOG NUMBER: P3AS09R209030D2WDE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	114	112	110	113	111	110	108	107	106	105		104	103	102		100
2	112	109	106	104	110	107	105	103	104	102	101		101	100	98		99
3	109	105	102	99	107	104	101	98	101	99	97		99	97	95		97
4	106	101	98	95	105	100	97	95	99	96	94		97	95	93		95
5	104	98	95	92	102	98	94	92	96	93	91		95	92	90		93
6	101	96	92	89	100	95	92	89	94	91	89		93	90	88		92
7	99	93	90	87	98	93	89	87	92	89	86		91	88	86		90
8	97	91	87	85	96	91	87	85	90	87	85		89	86	84		88
9	95	89	85	83	94	89	85	83	88	85	83		87	84	83		87
10	93	87	84	81	92	87	83	81	86	83	81		86	83	81		85

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1272705
5°	1071558
10°	669282
15°	250217
20°	85897
25°	35784
30°	16863
35°	7549
40°	3578
45°	1830
50°	682
55°	115
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1830 cd/sqm

TEST NUMBER: P1286723

CATALOG NUMBER: P3AS09R209030D2WDE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	404.8	48.3
10°-20°	333.5	39.7
20°-30°	75.8	9.0
30°-40°	19.3	2.3
40°-50°	4.8	0.6
50°-60°	0.6	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	814.1	97.0
0°-40°	833.3	99.3
0°-60°	838.8	100.0
0°-90°	839.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	839.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5804	
5°	4868	405
15°	1102	333
25°	148	76
35°	28	19
45°	6	5
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1286723

CATALOG NUMBER: P3AS09R209030D2WDE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	5804.0
1°	5754.7
2°	5609.8
3°	5401.8
4°	5146.6
5°	4868.1
6°	4557.7
7°	4215.3
8°	3815.7
9°	3419.8
10°	3005.8
11°	2565.2
12°	2125.4
13°	1752.7
14°	1396.5
15°	1102.2
16°	870.0
17°	686.3
18°	551.4
19°	448.4
20°	368.1
21°	307.7
22°	256.9
23°	213.6
24°	178.1
25°	147.9
27.5°	96.8
30°	66.6
32.5°	41.0
35°	28.2
37.5°	18.0
40°	12.5
42.5°	8.5
45°	5.9
47.5°	3.9
50°	2.0
52.5°	1.0
55°	0.3
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1286723

CATALOG NUMBER: P3AS09R209030D2WDE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)